

ALUMINUM ELECTROLYTIC CAPACITORS SPECIFICATION SHEET

CUSTOMER PART No.		
Rubycon PART No.	450 KXW 100 M EFC 18X30	
DRAWING No.	REE – 114323	ISSUE No. 1
ISSUE DATE	11 November 2013	




RUBYCON CORPORATION
ENGINEERING DIVISION

1938-1, NISHIMINOWA, INA-SHI, NAGANO-KEN, JAPAN
TEL No. 0265-72-7116
FAX No. 0265-73-3380

DESIGN	YUICHI KOBAYASHI
CHECK	TETSUYA MIZU
APPROVAL	HIROKAZU KOUMURA

Fixed aluminum electrolytic capacitors for use in electronic equipment	Customer Part Number	
	Rubycon Part Number	450 KXW 100 M EFC 18X30
	Style	CE 04
	Operating Temperature Range	-25°C~+105°C
	The General Standard	JIS C5141(1991)

1. Dimensions (unit:mm)

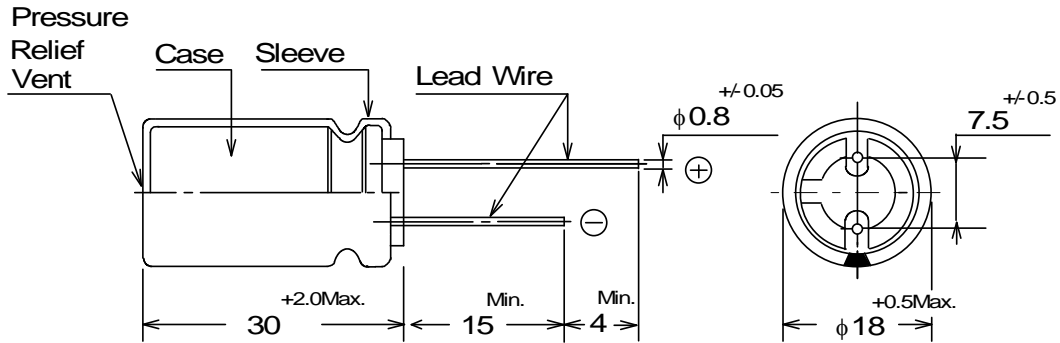


Name	Sleeve	Case	Seal	Lead Wire
Material	P.E.T.	Al	Rubber	CP Wire (Tin plating)
Appearance	Black			

2. Electrical Performance

Nominal Capacitance (μ F)	Capacitance Tolerance (%)	Rated Voltage (V.DC)	Surge Voltage (V.DC)	Leakage Current Max./5min. (μ A)	$\tan \delta$ Max.	Rated Ripple Current (A r.m.s.)
20°C/120Hz	20°C/120Hz			20°C	20°C/120Hz	105°C/120Hz
100	-20 ~ +20	450	500	636	0.20	0.65

3. Marking: Unless otherwise specified, capacitor shall be clearly marked on its body.

- (1) Brand
- (2) Rated Voltage
- (3) Nominal Capacitance
- (4) Series
- (5) Maximum Operating Temperature
- (6) Polarity
- (7) Lot No.
- (8) Sleeve Material

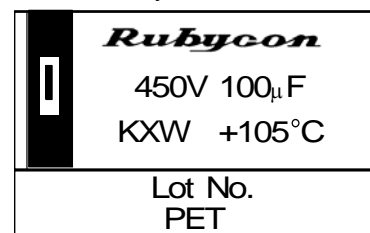

4. Temperature Characteristics (Impedance ratio at 120Hz)

$Z (-25^{\circ}\text{C})/Z (20^{\circ}\text{C}): 8 \text{ MAX.}$

5. Load Life Test

After 2000 $^{+72}_0$ hours application of D.C. rated working voltage with full rated ripple current at 105±2°C, the capacitor shall meet the following requirements.

- Capacitance Change : Within ±20% of the initial value
- Dissipation Factor : Not more than 200% of the specified value
- Leakage Current : Not more than the specified value

KXW SERIES	Rubycon RUBYCON CORPORATION	
------------	---------------------------------------	--

6. Notes (on the use of aluminum electrolytic capacitors)

(1) Charge and discharge

Do not use for a circuit where rapid charge and discharge is frequently repeated.

(2) Insulation

Aluminum electrolytic capacitors are covered with P.E.T. sleeve which purpose is mainly indication of necessary items.

The case of capacitor and the cathode terminal are not insulated.

(3) Polarity

Please confirm the polarity before use because this capacitor has polarity.

*Guide to application except the above are described in our catalog and EIAJ RCR-2367C.

EIAJ RCR-2367C: "Safety Application Guide for fixed aluminum electrolytic capacitors for use in electronic equipment"

Published by Japan Electronics and Information Technology Industries Association.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Rubycon](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#) [227RZS050M](#)
[476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#) [VTL100S10](#) [VTL470S10](#)
[VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-S560M16V6.3X7TBSTF](#) [RGA221M1CTA-](#)
[0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#) [NEV1000M6.3DE](#) [NEV100M16CB](#)
[NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#)