

SXG SERIES

UPGRADE

105°C Overvoltage Venting Specification, Miniaturized

- Load Life : 105°C 2000 hours.
- This series has specification of vent operation in overvoltage situation. Please consult us for any further details.

RoHS compliance



◆SPECIFICATIONS

Items	Characteristics								
Category Temperature Range	-25~+105°C								
Rated Voltage Range	200~450Vdc								
Capacitance Tolerance	±20%(20°C,120Hz)								
Leakage Current(MAX)	$I=3\sqrt{CV}$ (After 5 minutes application of rated voltage) I =Leakage Current(μ A) C =Capacitance(μ F) V =Rated Voltage(Vdc)								
Dissipation Factor(MAX) (tan δ)	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>200~400</td> <td>450</td> <td>(20°C,120Hz)</td> </tr> <tr> <td>tanδ</td> <td>0.15</td> <td>0.20</td> <td></td> </tr> </table>	Rated Voltage (Vdc)	200~400	450	(20°C,120Hz)	tan δ	0.15	0.20	
Rated Voltage (Vdc)	200~400	450	(20°C,120Hz)						
tan δ	0.15	0.20							
Endurance	<p>After applying rated voltage with rated ripple current for 2000 hours at 105°C, the capacitors shall meet the following requirements.</p> <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±20% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table>	Capacitance Change	Within ±20% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.		
Capacitance Change	Within ±20% of the initial value.								
Dissipation Factor	Not more than 200% of the specified value.								
Leakage Current	Not more than the specified value.								
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>200, 250</td> <td>400, 450</td> <td>(120Hz)</td> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>3</td> <td>8</td> <td></td> </tr> </table>	Rated Voltage (Vdc)	200, 250	400, 450	(120Hz)	Z(-25°C)/Z(20°C)	3	8	
Rated Voltage (Vdc)	200, 250	400, 450	(120Hz)						
Z(-25°C)/Z(20°C)	3	8							

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)	60(50)	120(100)	500	1k	10k \leq
Coefficient	0.77	1.00	1.17	1.22	1.40

◆OPTION


	Code
PET Sleeve without plate	EFC

◆PART NUMBER

□□□ SXG □□□□□ M □□□ SN D×L
 Rated Voltage Series Capacitance Capacitance Tolerance Option Terminal Code Case Size

◆DIMENSIONS

(mm)

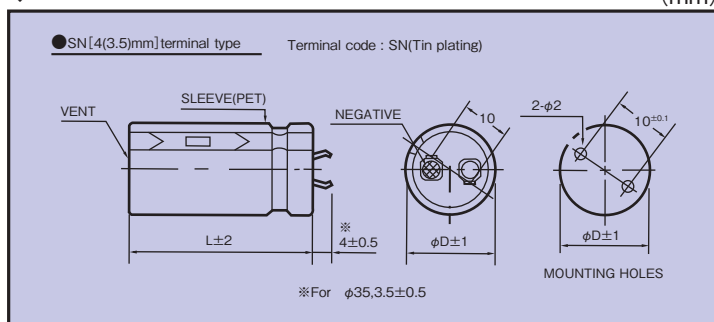

◆STANDARD SIZE

Rated Voltage (Vdc)	Capacitance (μF)	Size φD×L (mm)	Rated Ripple Current (A r.m.s., 105°C,120Hz)
200	150	20×20	0.66
	180	20×25	0.82
	180	22×20	0.80
	220	20×25	0.95
	220	22×25	1.00
	220	25×20	0.87
	270	20×30	1.10
	270	22×25	1.10
	270	25×20	0.95
	330	20×35	1.20
	330	22×30	1.25
	330	25×25	1.20
	330	30×20	1.15
	390	20×40	1.31
	390	22×30	1.31
	390	25×25	1.31
	390	30×20	1.25
	470	22×35	1.45
	470	25×30	1.45
	470	30×25	1.45
	560	22×40	1.60
	560	25×30	1.60
	560	30×25	1.60
	680	25×35	1.78
	680	30×30	1.78
	820	25×40	1.95
	820	30×35	2.11
	1000	30×35	2.40
1200	30×40	2.65	
1500	35×45	2.70	
250	270	25×30	1.15
	330	25×30	1.26
	390	30×25	1.42
	470	30×30	1.61
	470	35×25	1.61
	560	30×35	1.84
	560	35×30	1.84
	680	35×30	1.96
	820	35×35	2.26
400	39	20×20	0.34
	47	20×20	0.40
	56	20×25	0.45
	56	22×20	0.40
	68	20×25	0.49
	68	22×25	0.52
	68	25×20	0.49
	82	20×30	0.64
	82	22×25	0.64
	82	25×20	0.60
	100	20×35	0.70
	100	22×30	0.70
	100	25×25	0.70
	100	30×20	0.60

Rated Voltage (Vdc)	Capacitance (μF)	Size φD×L (mm)	Rated Ripple Current (A r.m.s., 105°C,120Hz)	
400	120	20×40	0.75	
	120	22×30	0.75	
	120	25×25	0.75	
	120	30×20	0.70	
	150	22×35	0.88	
	150	25×30	0.88	
	150	30×25	0.85	
	150	35×20	0.80	
	180	22×40	0.95	
	180	25×30	0.95	
	180	30×25	0.95	
	180	35×25	0.95	
	220	25×35	1.10	
	220	30×30	1.10	
	220	35×25	1.10	
	270	25×40	1.22	
	270	30×30	1.22	
	270	35×25	1.22	
	330	30×35	1.44	
	330	35×30	1.44	
	390	30×40	1.55	
	390	35×35	1.60	
	470	35×40	1.90	
	450	47	22×20	0.35
		47	22×25	0.35
		56	22×25	0.44
		68	22×30	0.53
		68	25×25	0.53
82		22×35	0.64	
82		25×25	0.64	
100		22×40	0.69	
100		25×30	0.69	
100		30×25	0.69	
120		22×45	0.75	
120		25×35	0.75	
120		30×25	0.75	
150		22×50	0.88	
150		25×40	0.88	
150		30×30	0.88	
150		35×25	0.80	
180		25×45	0.98	
180		30×30	0.98	
180		35×25	0.98	
220		25×50	1.10	
220		30×35	1.10	
220		35×30	1.10	
270		30×35	1.28	
270		30×40	1.28	
270		35×35	1.28	
330		30×50	1.45	
330		35×35	1.45	
330	35×40	1.45		
390	35×40	1.60		
470	35×50	1.85		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Snap In](#) category:

Click to view products by [Rubycon](#) manufacturer:

Other Similar products are found below :

[227LBA250M2BD](#) [MAL215969181E3](#) [ALC40F1012DH](#) [ALC40E1004EL](#) [LGZ2W101MELB30](#) [LGZ2W121MELB35](#) [LGZ2W151MELB40](#)
[LGZ2W820MELB25](#) [LGZ2W221MELB50](#) [LGZ2W271MELC45](#) [LGZ2W221MELC40](#) [LGZ2W331MELC50](#) [LGZ2W151MELC30](#)
[LGZ2W181MELC35](#) [LGZ2W121MELC25](#) [MAL219357471E3](#) [MAL219366151E3](#) [250USG560MEFCSN25X30](#) [MAL219357331E3](#)
[MAL219367121E3](#) [MAL219367221E3](#) [MAL219356681E3](#) [MAL219376221E3](#) [350KXF47MEFCSN20X20](#) [400MXC100MEFCSN22X30](#)
[10VXG12000MEFCSN25X25](#) [50KXF1500MEFCSN25X20](#) [16USC15000MEFCSN25X25](#) [450SXG100MEFCSN25X30](#)
[200VXR470MEFCSN22X40](#) [63USC4700MEFCSN30X30](#) [100VXG1000MEFCSN22X40](#) [160USG1000MEFCSN30X25](#)
[50VXG4700MEFCSN25X40](#) [35VXG6800MEFCSN30X30](#) [35USG15000MEFCSN25X45](#) [100MXC2200MEFCSN30X35](#) [MAL219359181E3](#)
[63VXG8200MEFCSN35X50](#) [450NXG390MEFCSN30X50](#) [420VXH470MEFCSN30X45](#) [80MXC8200MEFCSN35X50](#)
[100VXG3300MEFCSN35X45](#) [250VXG1500MEFCSN30X60](#) [400MXH560MEFCSN30X45](#) [450MXC470MEFCSN35X50](#)
[450SXG390MEFCSN35X40](#) [MAL219359391E3](#) [400MXK390MEFCSN25X40](#) [B43548A6686M060](#)