

MS7 SERIES

85°C 7mm Height

• Load Life : 85°C 1000 hours.

RoHS
compliance

◆SPECIFICATIONS

Items	Characteristics																																		
Category Temperature Range	-40~+85°C																																		
Rated Voltage Range	4~63Vdc																																		
Capacitance Tolerance	±20%(20°C,120Hz)																																		
Leakage Current(MAX)	I=0.01CV or 3μA whichever is greater. (After 2 minutes application of rated voltage) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(Vdc)																																		
Dissipation Factor(MAX) (tanδ)	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td>tanδ</td> <td>0.35</td> <td>0.24</td> <td>0.20</td> <td>0.17</td> <td>0.15</td> <td>0.13</td> <td>0.10</td> <td>0.10</td> </tr> </table> (20°C,120Hz)								Rated Voltage (Vdc)	4	6.3	10	16	25	35	50	63	tanδ	0.35	0.24	0.20	0.17	0.15	0.13	0.10	0.10									
Rated Voltage (Vdc)	4	6.3	10	16	25	35	50	63																											
tanδ	0.35	0.24	0.20	0.17	0.15	0.13	0.10	0.10																											
Endurance	After applying rated voltage with rated ripple current for 1000 hrs at 85°C, the capacitors shall meet the following requirements. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±20% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table>								Capacitance Change	Within ±20% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.																					
Capacitance Change	Within ±20% of the initial value.																																		
Dissipation Factor	Not more than 200% of the specified value.																																		
Leakage Current	Not more than the specified value.																																		
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>7</td> <td>4</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>15</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> </tr> </table> (120Hz)								Rated Voltage (Vdc)	4	6.3	10	16	25	35	50	63	Z(-25°C)/Z(20°C)	7	4	3	3	2	2	2	2	Z(-40°C)/Z(20°C)	15	10	8	6	4	4	4	4
Rated Voltage (Vdc)	4	6.3	10	16	25	35	50	63																											
Z(-25°C)/Z(20°C)	7	4	3	3	2	2	2	2																											
Z(-40°C)/Z(20°C)	15	10	8	6	4	4	4	4																											

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

Frequency(Hz)	60(50)	120	500	1k	10k≤
Coefficient	1μF	0.50	1.00	1.20	1.30
	2.2~4.7μF	0.65	1.00	1.20	1.30
	10~47μF	0.80	1.00	1.20	1.30
	100~470μF	0.80	1.00	1.10	1.15

◆OPTION


	Code
PET Sleeve	EFC

◆PART NUMBER

□□□ MS7 □□□□□ M □□□ D×L
 Rated Voltage Series Capacitance Capacitance Tolerance Option Lead Forming Case Size

◆DIMENSIONS

(mm)

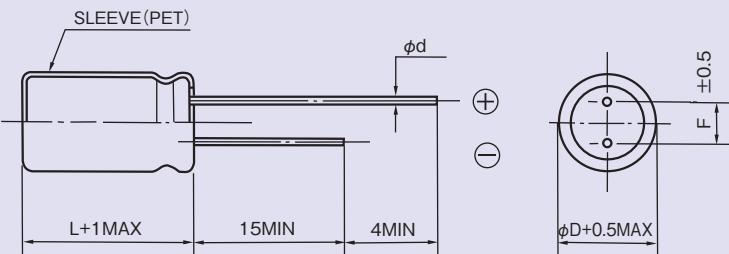

ϕD	4	5	6.3	8
ϕd	0.45			
F	1.5	2.0	2.5	3.5

◆STANDARD SIZE
Size $\phi D \times L$ (mm), Rated Ripple Current (mA r.m.s./85°C, 120Hz)

Cap(μF)	Vdc 4		6.3		10		16	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
10							4×7	28
22			4×7	34	4×7	38	4×7	42
33	4×7	33	4×7	42	4×7	46	5×7	62
47	4×7	39	4×7	50	5×7	66	5×7	73
100	5×7	65	5×7	87	6.3×7	99	6.3×7	110
220	6.3×7	110	6.3×7	133	8×7	165	8×7	145
330	8×7	165	8×7	180	8×7	210		
470	8×7	190						

Cap(μF)	Vdc 25		35		50		63	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
1					4×7	12	4×7	12
2.2					4×7	16	4×7	16
3.3			4×7	18	4×7	19	5×7	24
4.7	4×7	21	4×7	22	4×7	24	6.3×7	33
10	4×7	31	5×7	32	5×7	42	6.3×7	45
22	5×7	55	6.3×7	60	6.3×7	64		
33	6.3×7	66	6.3×7	73	8×7	75		
47	6.3×7	80	8×7	95	8×7	85		
100	8×7	115	8×7	115				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:

Click to view products by Rubycon manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVV5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#)
[SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-](#)
[6.3X11](#) [VTI100S10](#) [VTI470S10](#) [VTI470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [NEV1000M6.3DE](#) [NEV100M16CB](#)
[NEV100M50DD-BULK](#) [NEV220M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#) [NEV330M63EF](#)