


**RUILON**

瑞隆源电子

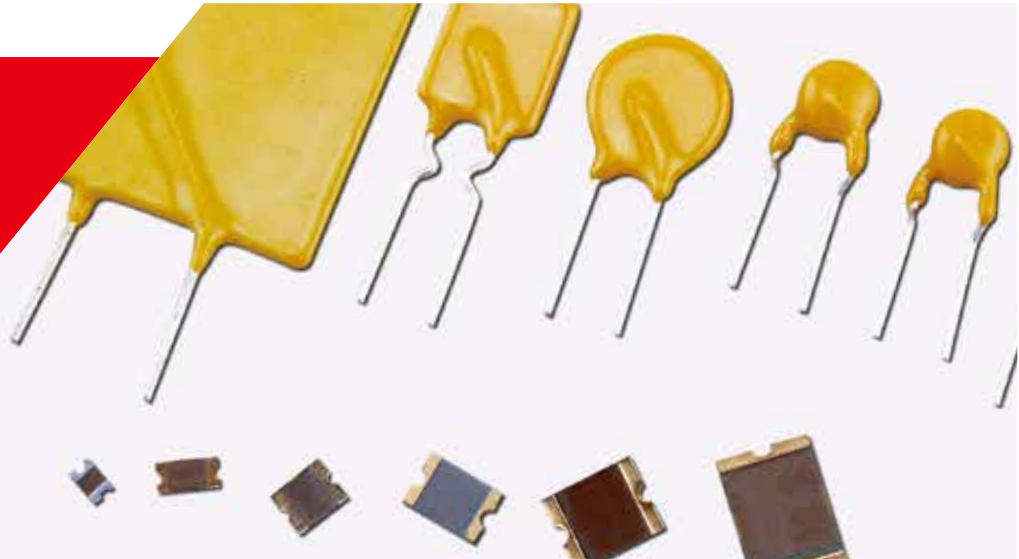

# Positive Thermal Coefficient

**RL30 Series**

**361°** Circuit Protection  
System

Revision:MAR-17

Please refer to <http://www.ruilon.com.cn> for current information.

## Positive Thermal Coefficient - RL30 Series

Positive Thermal Coefficient devices(PTC),provide over-current protection for electrical and electronic devices.They function using conducting strips of metal imbedded inside polymers.Under normal conditions,the devices resistance is near zero,but over-current conditions will heat the PTC and expand the polymer,increasing the impedance.When current returns to normal,the components cool down,returning to their original shape and very low levels of resistance.




### Features

- I(hold): 0.5~9.0A
- 30V Operating voltages
- Radial leaded devices
- Over-current protection
- Very high voltage surge capabilities.
- Available in lead-free version.
- Fast time-to-trip
- RoHS compliant, Lead- Free and Halogen-Free


### Applications

- Overcurrent and overtemperature protection of automotive electronics
- Hard disk drives
- Point-of-sale (POS) equipment
- PCMCIA cards
- Power over Ethernet (POE)
- HDMI 1.4 Source protection
- Computers & peripherals
- Industrial control
- Security systems

### Product Name

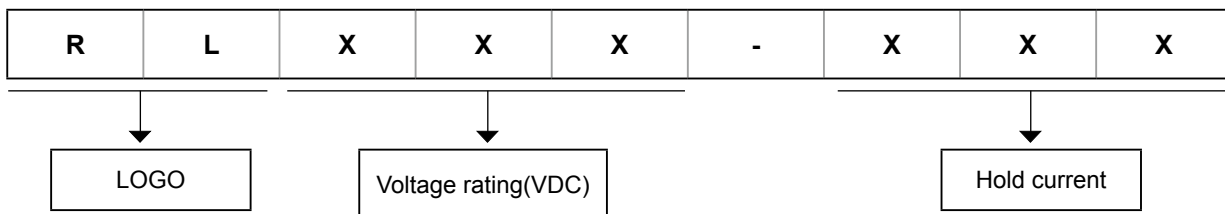

## Positive Thermal Coefficient - RL30 Series

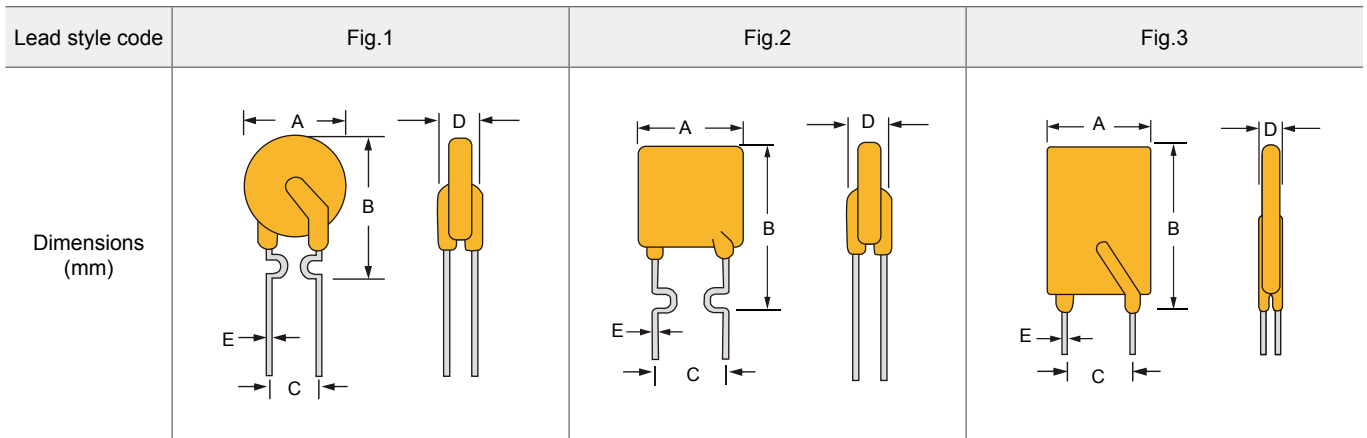

Type Number	$I_{hold}$	$I_T$	$V_{max}$	Time-to-Trip		$I_{max}$	$R_{max}$	$R_{min}$	Package Dimensions (mm)					Circuit Figure
	A	A	V	$I_{trip}$ A	$T_{max}$ S	A	$\Omega$	$\Omega$	A (max)	B (max)	C (typ)	D (max)	E (typ)	
RL30-050	0.5	1	30	1.5	15	40	0.8	0.2	8	14	5.1	3	0.5	Fig.1
RL30-070	0.7	1.4	30	2.1	15	40	0.45	0.12	7.4	13	5.1	3	0.5	Fig.1
RL30-075	0.75	1.5	30	2.25	15	40	0.35	0.12	7.4	13	5.1	3	0.5	Fig.2
RL30-090	0.9	1.8	30	2.7	15	40	0.22	0.07	7.4	13	5.1	3	0.5	Fig.2
RL30-110	1.1	2.2	30	3.3	15	40	0.2	0.05	7.4	14.5	5.1	3	0.5	Fig.2
RL30-135	1.35	2.7	30	4.05	15	40	0.16	0.04	9.2	14.5	5.1	3	0.6	Fig.2
RL30-160	1.6	3.2	30	4.8	20	40	0.14	0.03	10	17	5.1	3	0.6	Fig.2
RL30-185	1.85	3.7	30	5.55	20	40	0.12	0.03	11	17.5	5.1	3	0.6	Fig.2
RL30-200	2	4	30	6	20	40	0.1	0.02	12	19.5	5.1	3	0.6	Fig.2
RL30-250	2.5	5	30	7.5	20	40	0.08	0.02	12.4	20	5.1	3	0.6	Fig.2
RL30-300	3	6	30	9	20	40	0.07	0.02	13	20	5.1	3	0.8	Fig.3
RL30-400	4	8	30	12	20	40	0.07	0.01	14	20.1	5.1	3	0.8	Fig.3
RL30-500	5	10	30	15	20	40	0.07	0.01	17.7	21.5	10.5	3	0.8	Fig.3
RL30-600	6	12	30	18	25	40	0.04	0.005	18	26	10.5	3	0.8	Fig.3
RL30-700	7	14	30	21	25	40	0.03	0.005	20	27	10.5	3	0.8	Fig.3
RL30-800	8	16	30	24	25	40	0.03	0.005	23.5	29.2	10.5	3	0.8	Fig.3
RL30-900	9	18	30	27	25	40	0.02	0.005	24.3	30	10.5	3	0.8	Fig.3


- $I_H$  = Hold current: maximum current device will pass without tripping in 25°C still air.
- $I_T$  = Trip current: minimum current at which the device will trip in 25°C still air.
- $V_{MAX}$  = Maximum voltage device can withstand without damage at rated current.
- $I_{MAX}$  = Maximum fault current device can withstand without damage at rated voltage.
- $R_{MAX}$  = Maximum resistance of device in initial (un-soldered) state.
- $R_{MIN}$  = Minimum resistance of device in initial (un-soldered) state.
- Pd typ. = Typical power dissipation from device when in the tripped state at 25°C still air

## Positive Thermal Coefficient - RL30 Series

### Ihold Versus Temperature


Type Number	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
RL30-050	0.78	0.68	0.60	0.50	0.41	0.36	0.32	0.27	0.20
RL30-075	1.16	1.02	0.89	0.75	0.61	0.54	0.47	0.41	0.30
RL30-090	1.31	1.17	1.04	0.90	0.75	0.69	0.61	0.55	0.47
RL30-110	1.60	1.43	1.27	1.10	0.91	0.85	0.75	0.67	0.57
RL30-135	1.96	1.76	1.55	1.35	1.12	1.04	0.92	0.82	0.70
RL30-160	2.32	2.08	1.84	1.60	1.33	1.23	1.09	0.98	0.83
RL30-185	2.68	2.41	2.13	1.85	1.54	1.42	1.26	1.13	0.96
RL30-250	3.63	3.25	2.88	2.50	2.08	1.93	1.70	1.53	1.30
RL30-300	4.35	3.90	3.45	3.00	2.49	2.31	2.04	1.83	1.56
RL30-400	5.80	5.20	4.60	4.00	3.32	3.08	2.72	2.44	2.08
RL30-500	7.25	6.50	5.75	5.00	4.15	3.85	3.10	3.05	2.60
RL30-600	8.70	7.80	6.90	6.00	4.98	4.62	4.08	3.66	3.12
RL30-700	10.15	9.10	8.05	7.00	4.81	5.39	4.76	4.27	3.64
RL30-800	11.60	10.40	9.20	8.00	6.64	6.16	5.44	4.88	4.16
RL30-900	13.05	11.70	10.35	9.00	7.47	6.93	6.12	5.49	4.68

### Average Time Current Curves

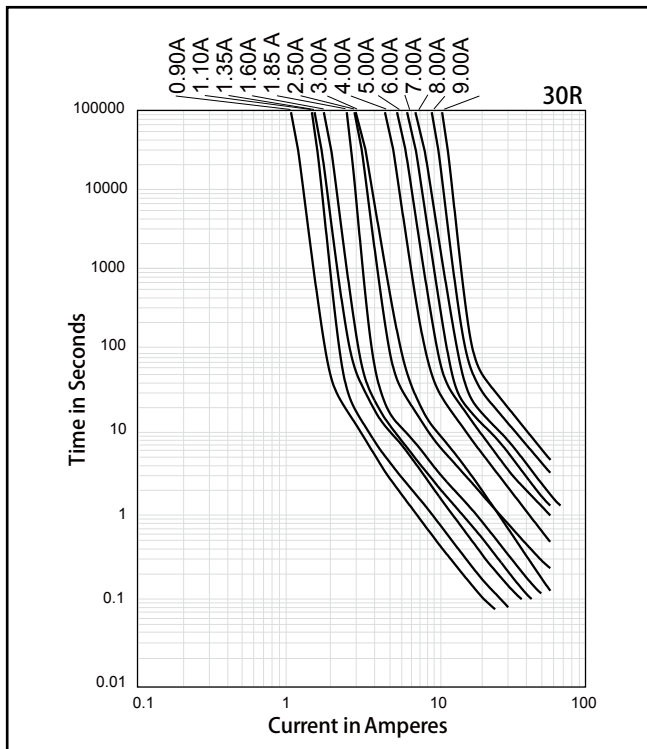

The average time current curves and Temperature Derating curve performance is affected by a number of variables, and these curves provided as guidance only. Customer must verify the performance in their application.

### Temperature Derating Curve

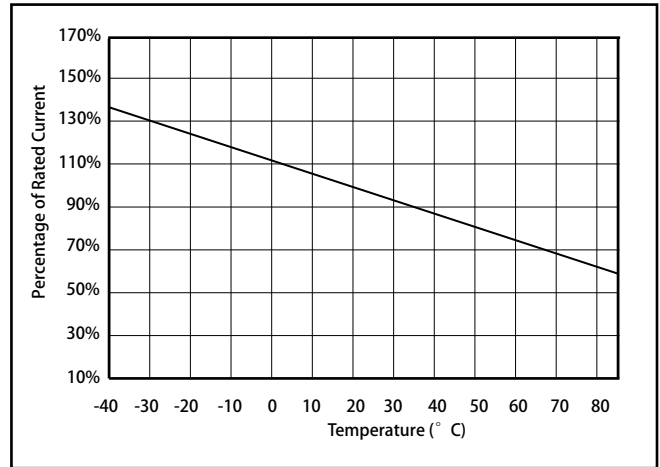

## Positive Thermal Coefficient - RL30 Series

### Manual Soldering Recommendation Parameters

Items	Conditions
Soldering condition	The highest power of the manual soldering iron should be 30W or less, soldering temperature should not be higher than 280℃ .
Soldering time	The soldering time should be kept within 3 seconds, otherwise it might cause insulation layer cracking, and increased part resistance.
Soldering position	The distance on the leads between the soldering point and bottom of the PPTC body should be equal or greater than 4mm.
Other	The soldering iron should not contact the PPTC body except the leads. If the soldering conditions are kept to lower temperature, less time and larger distance, the outcome of the soldering will be better.

Notes: 1. Before using the device must be stored in the original bags, if the storage conditions do not guarantee, the device may not be able to meet the given value.  
 2. The devices can't used for reflow soldering.

### Mechanical Characteristics


Items	Specifications	Test Conditions/Methods
Tensile strength	No visible damage	1.0Kgf, 10 seconds
Bending strength	No visible damage	0.5Kgf, 90°, 3 times
Vibration	No visible damage	Freq: 10-55Hz, Amp: 0.75mm, 1min

### Mechanical Characteristics

Items	Specifications	Test Conditions/Methods
Solder ability	No visible damage, Solder OK, Solder area $\geq 95\%$	245±5℃ , 2±1s, dipping depth=0.5inch max from the body
Resistance to soldering heat	No visible damage, Electrical OK,   $\Delta R/R0$   $\leq 50\%$	260±5℃ , 10+2/-0s
Damp heat, steady state	No visible damage, Electrical OK,   $\Delta R/R0$   $\leq 20\%$	40±2℃ , 90~95 % RH, total 48Hrs, after 4Hrs test electrical parameter
Temperature cycling	No visible damage, Electrical OK,   $\Delta R/R0$   $\leq 20\%$	Ta = -10+0/-1℃ 30min, Ta = 70+1/- 0℃ 30min, 5cycles, after 1hr test electrical parameter

## Positive Thermal Coefficient - RL30 Series

### Packaging

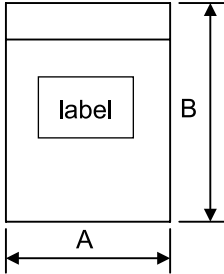Bag	Part Number	Dimension A×B (mm)	Quantity
	RL30-050 ~ RL30-700	150×200	500pcs/bag
	RL30-800 ~ RL30-900	150×200	200pcs/bag

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Resettable Fuses - PPTC category](#):*

*Click to view products by [Ruilongyuan manufacturer](#):*

Other Similar products are found below :

[0001.1010.G](#) [D38999/20WG39JN](#) [F02B250V1-4AS](#) [9728214S-2\(621\)](#) [RF0627-000](#) [RF2534-000](#) [ASMD185-2](#) [EN2997S61212AN](#)  
[EN2997SE61203AN](#) [BK-ABC-V-5-R](#) [LR4-550RAF](#) [SMD125-2](#) [F60C500V20AS](#) [RF0078-000](#) [RF1548-000](#) [RF1973-000](#) [RF2171-000](#)  
[RF2531-000](#) [RF2533-000](#) [RF2550-000](#) [TR600-150Q-B-0.5-0.130](#) [BK-AGX-20](#) [5E4795/04-1502](#) [EN2997S61212MN](#) [EN2997SE61203MN](#)  
[EN2997SE61212AN](#) [EN2997SE61212MN](#) [BK1/S505-1.25-R](#) [TR-3216FF20-R](#) [TRF250-080T-B-1.0-0.125](#) [JT06RT1832BN014](#) [S-3-2-10](#)  
[SMD100-2](#) [FRN-R-5-6-10](#) [FRS-R-3-2-10](#) [LP-CC-2-1-2](#) [LPS-RK-3-2-10SP](#) [BK-AGC-1-8-R](#) [BK-AGC-2-10-R](#) [BK-AGC-7-1-2](#) [BK-GDC-](#)  
[500MA](#) [BK-MDL-1-6-10-R](#) [BK-SFE-4](#) [BK-ABC-1-R](#) [BK-C518-250-R](#) [BK-GDB-2A](#) [BK-MDL-1-8-R](#) [BK-MDL-6](#) [BK-AGC-5-R](#) [BK-ATC-](#)