

# NTC Thermistor

## Features

This is a Negative Temperature Coefficient Resistor Whose resistance changes with ambient temperature changes. Thermistor comprises 2 or 4 kinds of metal oxides of iron, nickel, cobalt, manganese and copper, being shaped and Sintered at high temperature(1200°C to 1500°C )

## Critical Technical Parameters of NTC Thermistor

\*  $R_t$ ---Resistance Value at Zero-power

It's a resistance which is got at a fixed temperature on a basis of a testing power which causes resistance to Vary in a range which can be ignored in relation to the total testing error.

\*  $R_{25}$ ---Resistance Value at Rated Zero-power

The design resistance of the thermistor usually refers to the resistance value got at Zero-power at 25°C , which is usually indicated on the thermistor.

\* Max. steady state current.  $I_{max}$ .

The maximum allowable continuous current passing through thermistor at 25°C.

\* Dissipation Coefficient  $\delta$


It's the ratio of the changes with a thermistor dissipation power, in a pre-set ambient temperature, to the changes with the temperature. The formula is as below:  $\delta = \Delta P / \Delta T$  ,  $\delta$  changes in response when the ambient temperature changes, within the ranges of the working temperature.



## Applications

Conversion power supply, switch power, UPS power, Kinds of electric heater, electronic energy-saving lamps, electronic ballast etc all kinds of power circuit protection of electronic equipments, filament protection of CRT, bulb and other lighting lamps.

## Part Numbering System

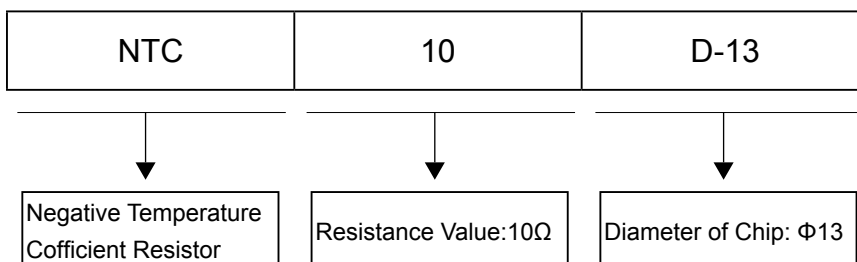

# NTC Thermistor

## Electrical Characteristics

Type Number	Zero Power Resistance At 25°C	Max. Steady State Current At 25°C	Thermal Dissipation Constant	Thermal Time Constant	Operating Temperature Range	Package Dimensions (mm)
	Ω	A	mW/°C	Sec	°C	
<b>D-5 Series Sensing NTC Thermistor</b>						
5D-5	5	1	6	20	-55 ~ +200	
10D-5	10	0.7	6	20	-55 ~ +200	
60D-5	60	0.3	6	18	-55 ~ +200	
200D-5	200	0.1	6	18	-55 ~ +200	
<b>D-7 Series Sensing NTC Thermistor</b>						
5D-7	5	2	10	28	-55 ~ +200	
8D-7	8	1	9	27	-55 ~ +200	
10D-7	10	1	9	27	-55 ~ +200	
12D-7	12	1	9	27	-55 ~ +200	
16D-7	16	0.7	9	27	-55 ~ +200	
22D-7	22	0.6	9	27	-55 ~ +200	
33D-7	33	0.5	10	28	-55 ~ +200	
200D-7	200	0.2	11	28	-55 ~ +200	
<b>D-9 Series Sensing NTC Thermistor</b>						
3D-9	3	4	11	35	-55 ~ +200	
4D-9	4	3	11	35	-55 ~ +200	
5D-9	5	3	11	34	-55 ~ +200	
6D-9	6	2	11	34	-55 ~ +200	
8D-9	8	2	11	32	-55 ~ +200	
9D-9	9	2	11	32	-55 ~ +200	
10D-9	10	1	11	32	-55 ~ +200	
12D-9	12	1	11	32	-55 ~ +200	
16D-9	16	1	11	31	-55 ~ +200	
20D-9	20	1	11	30	-55 ~ +200	
22D-9	22	1	11	30	-55 ~ +200	
30D-9	30	1	11	30	-55 ~ +200	
33D-9	33	1	11	30	-55 ~ +200	
50D-9	50	1	11	30	-55 ~ +200	
60D-9	60	0.8	11	30	-55 ~ +200	
80D-9	80	0.8	11	30	-55 ~ +200	
120D-9	120	0.8	11	30	-55 ~ +200	
200D-9	200	0.5	11	32	-55 ~ +200	
400D-9	400	0.2	11	32	-55 ~ +200	



# NTC Thermistor

## Electrical Characteristics

Type Number	Zero Power Resistance At 25°C	Max. Steady State Current At 25°C	Thermal Dissipation Constant	Thermal Time Constant	Operating Temperature Range	Package Dimensions (mm)
	Ω	A	mW/°C	Sec	°C	
<b>D-11 Series Sensing NTC Thermistor</b>						
2.5D-11	2.5	5	13	43	-55 ~ +200	
3D-11	3	5	13	43	-55 ~ +200	
4D-11	4	4	13	44	-55 ~ +200	
5D-11	5	4	13	45	-55 ~ +200	
6D-11	6	3	13	45	-55 ~ +200	
8D-11	8	3	14	47	-55 ~ +200	
10D-11	10	3	14	47	-55 ~ +200	
12D-11	12	2	14	48	-55 ~ +200	
16D-11	16	2	14	50	-55 ~ +200	
20D-11	20	2	15	52	-55 ~ +200	
22D-11	22	2	15	52	-55 ~ +200	
30D-11	30	1.5	15	52	-55 ~ +200	
33D-11	33	1.5	15	52	-55 ~ +200	
50D-11	50	1.5	15	52	-55 ~ +200	
60D-11	60	1.5	15	52	-55 ~ +200	
80D-11	80	1.2	15	52	-55 ~ +200	
120D-13	120	1.2	16	65	-55 ~ +200	
<b>D-13 Series Sensing NTC Thermistor</b>						
1.3D-13	1.3	7	13	60	-55 ~ +200	
1.5D-13	1.5	7	13	60	-55 ~ +200	
2.5D-13	2.5	6	13	60	-55 ~ +200	
3D-13	3	6	14	60	-55 ~ +200	
4D-13	4	5	15	67	-55 ~ +200	
5D-13	5	5	15	68	-55 ~ +200	
6D-13	6	4	15	65	-55 ~ +200	
7D-13	7	4	15	65	-55 ~ +200	
8D-13	8	4	15	60	-55 ~ +200	
10D-13	10	4	15	65	-55 ~ +200	
12D-13	12	3	16	65	-55 ~ +200	
15D-13	15	3	16	60	-55 ~ +200	
16D-13	16	3	16	60	-55 ~ +200	
20D-13	20	3	16	65	-55 ~ +200	
30D-13	30	2.5	16	65	-55 ~ +200	
47D-13	47	2	17	65	-55 ~ +200	
120D-13	120	1.2	16	65	-55 ~ +200	

# NTC Thermistor

## Electrical Characteristics

Type Number	Zero Power Resistance At 25°C	Max. Steady State Current At 25°C	Thermal Dissipation Constant	Thermal Time Constant	Operating Temperature Range	Package Dimensions (mm)
	Ω	A	mW/°C	Sec	°C	
<b>D-15 Series Sensing NTC Thermistor</b>						
1.3D-15	1.3	8	18	68	-55 ~ +200	
1.5D-15	1.5	8	18	69	-55 ~ +200	
3D-15	3	7	18	76	-55 ~ +200	
5D-15	5	6	20	76	-55 ~ +200	
6D-15	6	5	20	80	-55 ~ +200	
7D-15	7	5	20	80	-55 ~ +200	
8D-15	8	5	20	80	-55 ~ +200	
10D-15	10	5	20	75	-55 ~ +200	
12D-15	12	5	21	75	-55 ~ +200	
15D-15	15	4	21	85	-55 ~ +200	
16D-15	16	4	21	70	-55 ~ +200	
20D-15	20	4	21	86	-55 ~ +200	
30D-15	30	3	21	75	-55 ~ +200	
47D-15	47	3	21	86	-55 ~ +200	
120D-15	120	1.8	22	87	-55 ~ +200	
<b>D-20 Series Sensing NTC Thermistor</b>						
0.7D-20	0.7	11	24	89	-55 ~ +200	
1.3D-20	1.3	9	24	88	-55 ~ +200	
3D-20	3	8	24	88	-55 ~ +200	
5D-20	5	7	24	87	-55 ~ +200	
6D-20	6	6	25	103	-55 ~ +200	
8D-20	8	6	25	105	-55 ~ +200	
10D-20	10	6	25	102	-55 ~ +200	
12D-20	12	5	25	100	-55 ~ +200	
16D-20	16	5	25	100	-55 ~ +200	
<b>D-25 Series Sensing NTC Thermistor</b>						
1D-25	1	12	30	120	-55 ~ +200	
1.5D-25	1.5	10	30	121	-55 ~ +200	
3D-25	3	9	32	124	-55 ~ +200	
5D-25	5	8	32	125	-55 ~ +200	
8D-25	8	7	33	125	-55 ~ +200	
10D-25	10	7	32	125	-55 ~ +200	
12D-25	12	6	32	126	-55 ~ +200	
16D-25	16	6	35	126	-55 ~ +200	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for NTC (Negative Temperature Coefficient) Thermistors category:*

*Click to view products by Ruilongyuan manufacturer:*

Other Similar products are found below :

[118-253FAJ-P01](#) [121-202EAC-P01](#) [123-802EAJ-P01](#) [128-105NDP-Q02](#) [135-503LAD-J01](#) [B57250V2104F360](#) [B57250V2473F560](#)  
[B57620C472K962](#) [NTCLE410E3103F](#) [A1004SG22P0](#) [199-303KAF-A02](#) [30054-4](#) [M09N038F](#) [B57423V2473H062](#) [B57471V2474H062](#)  
[B57620C5223J062](#) [500-52AA04-101](#) [526-31AA19-104](#) [526-31AN12-202](#) [103AT-5-1P-FT](#) [10K3A542I](#) [112-103FAG-H02](#) [112-104KAG-](#)  
[B01](#) [11028414-00](#) [111-182CAG-H01](#) [112-103FAF-H01](#) [112-104KBF-F01](#) [118-202CAJ-P01](#) [526-31AA79-102](#) [B57442V5103J62](#)  
[B57401V2103H62](#) [194303KEVA01](#) [NTCACAPE3C90193](#) [USP11595](#) [B57359V2224J260](#) [B57343V5103J360](#) [50070974-003-01](#) [189-](#)  
[602LDR-A01](#) [B57621C5472K062](#) [B57421V2153J062](#) [B57230V2103H260](#) [B57471V2684H062](#) [B57471V2333H062](#) [126-153YJC-B01](#)  
[NTCS0603E3333FHT](#) [118-802EAJ-P01](#) [121-103FAC-Q02](#) [144-101FAG-001](#) [526-31AD07-153](#) [521-53AW02-104](#)