

## ULTRA LOW CAPACITANCE TVS/ESD ARRAY

### Description

The RLSD32AXX1LC and RLSD32AXX1LV Series are ultra low capacitance transient voltage suppressor arrays, designed to protect applications such as portable electronics and SMART phones. This series is available in both unidirectional and bidirectional configurations and is rated at 350 Watts for an 8/20 $\mu$ s waveshape. The RLSD32AXX1LC and RLSD32AXX1LV Series meets IEC 61000-4-2 (ESD) and IEC 61000-4-4 (EFT) requirements. At higher operating frequencies or faster edge rates, insertion loss and signal integrity are a major concern. This series offers a ultra low capacitance and low leakage current in a miniature SOD-323 package.

### Features

- 350 Watts peak pulse power ( $t_p = 8/20\mu s$ )
- Transient protection for data lines to IEC 61000-4-2 (ESD)  $\pm 15kV$  (air),  $\pm 8kV$  (contact) IEC 61000-4-4 (EFT) 40A (5/50ns) IEC 61000-4-5 (Lightning) 24A (8/20 $\mu s$ )
- Small package for use in portable electronics
- Suitable replacement for MLV's in ESD protection applications
- Protects one I/O or power line
- Low clamping voltage
- Working voltages: 3.3V, 5V, 12V, 15V, 24V
- Low leakage current
- Solid-state silicon avalanche technology


### Mechanical Characteristics

- Molded JEDEC SOD-323
- Weight 10 milligrams (Approximate)
- Flammability rating UL 94V-0
- 8mm Tape and Reel Per EIA Standard 481
- Device Marking: Marking Code & Polarity Band (Unidirectional Only)

### Applications

- Ethernet – 10/100/1000 Base T
- Cellular Phones
- Handheld – Wireless Systems
- Personal Digital Assistant(PDA)
- PUSB Interface

## Schematic & PIN Configuration

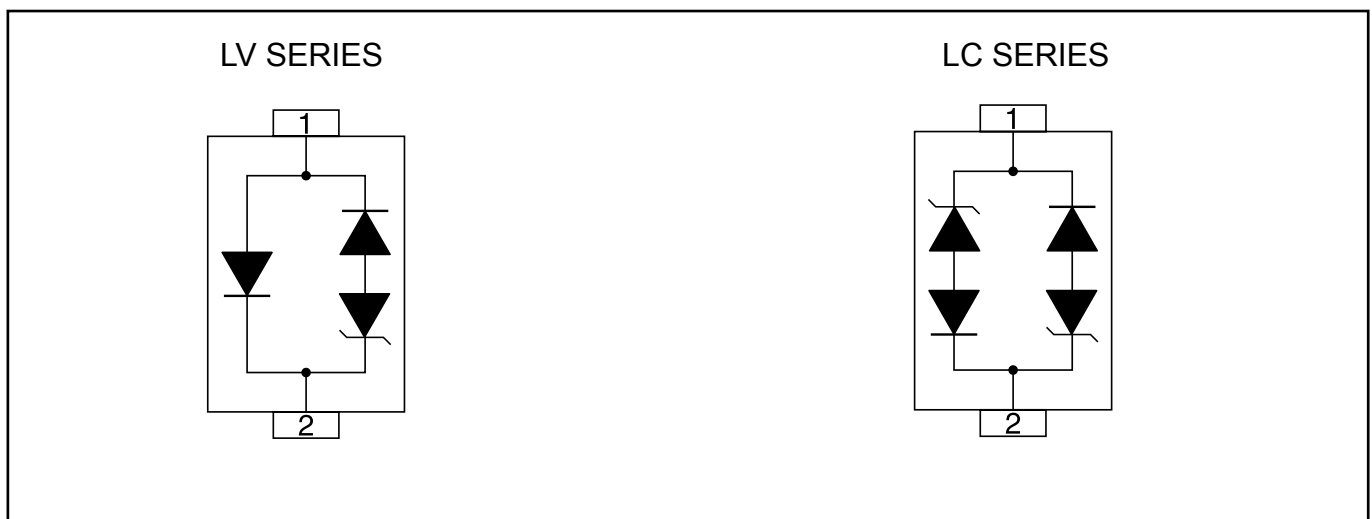

## Protection Products

### Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power (tp =8/20μs)	P <sub>pk</sub>	350	Watts
Lead Soldering Temperature	T <sub>L</sub>	260 (10 sec.)	°C
Operating Temperature	T <sub>J</sub>	-55 to +125	°C
Storage Temperature	T <sub>STG</sub>	-55 to +150	°C

### Electrical Characteristics (T=25°C)

#### RLSD32A031LC/RLSD32A031LV

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V <sub>RWM</sub>	-	-	-	3.0	V
Reverse Breakdown Voltage	V <sub>BR</sub>	I <sub>T</sub> =1mA	3.3	-	-	V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> =3V, T=25°C	-	-	5	μA
Clamping Voltage	V <sub>C</sub>	I <sub>PP</sub> =1A, I <sub>P</sub> =8/20μS	-	-	7.0	V
Junction Capacitance	C <sub>j</sub>	V <sub>R</sub> = 0V, f = 1MHz	-	-	3	pF

#### RLSD32A051LC/RLSD32A051LV

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V <sub>RWM</sub>	-	-	-	5.0	V
Reverse Breakdown Voltage	V <sub>BR</sub>	I <sub>T</sub> =1mA	6.1	-	-	V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> =5V, T=25°C	-	-	5	μA
Clamping Voltage	V <sub>C</sub>	I <sub>PP</sub> =1A, I <sub>P</sub> =8/20μS	-	-	9.8	V
Junction Capacitance	C <sub>j</sub>	V <sub>R</sub> = 0V, f = 1MHz	-	-	3	pF

## Electrical Characteristics (T=25°C)

### RLSD32A121LC/RLSD32A121LV

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	$V_{RWM}$	-	-	-	12	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1mA$	13.5	-	-	V
Reverse Leakage Current	$I_R$	$V_{RWM}=12V, T=25^\circ C$	-	-	2	$\mu A$
Clamping Voltage	$V_C$	$I_{PP}=1A, I_P=8/20\mu S$	-	-	19	V
Junction Capacitance	$C_j$	$V_R = 0V, f = 1MHz$	-	-	3	pF

### RLSD32A151LC/RLSD32A151LV

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	$V_{RWM}$	-	-	-	15	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1mA$	16.7	-	-	V
Reverse Leakage Current	$I_R$	$V_{RWM}=15V, T=25^\circ C$	-	-	1	$\mu A$
Clamping Voltage	$V_C$	$I_{PP}=1A, I_P=8/20\mu S$	-	-	24	V
Junction Capacitance	$C_j$	$V_R = 0V, f = 1MHz$	-	-	3	pF

### RLSD32A181LC/RLSD32A181LV

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	$V_{RWM}$	-	-	-	18	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1mA$	20.0	-	-	V
Reverse Leakage Current	$I_R$	$V_{RWM}=18V, T=25^\circ C$	-	-	1	$\mu A$
Clamping Voltage	$V_C$	$I_{PP}=1A, I_P=8/20\mu S$	-	-	29	V
Junction Capacitance	$C_j$	$V_R = 0V, f = 1MHz$	-	-	3	pF

# Electrical Characteristics (T=25°C)

## RLSD32A241LC/RLSD32A241LV

Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	$V_{RWM}$				24	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1mA$	26.7			V
Reverse Leakage Current	$I_R$	$V_{RWM}=24V, T=25^\circ C$			1	$\mu A$
Clamping Voltage	$V_C$	$I_{PP}=1A, I_P=8/20\mu S$			43	V
Junction Capacitance	$C_j$	$V_R = 0V, f = 1MHz$			3	pF

## Protection Products

### Typical Characteristics

FIGURE 1  
PEAK PULSE POWER VS PULSE TIME



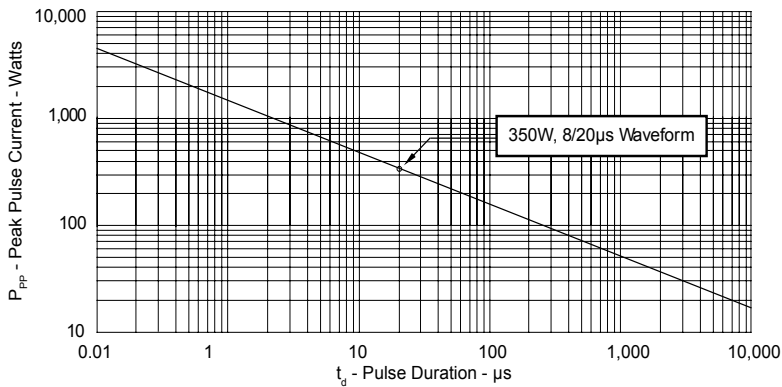



FIGURE 2  
PULSE WAVE FORM

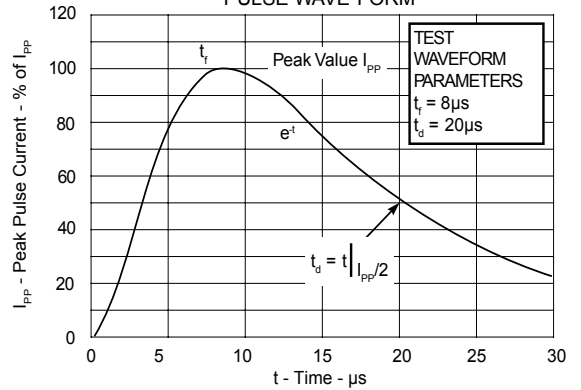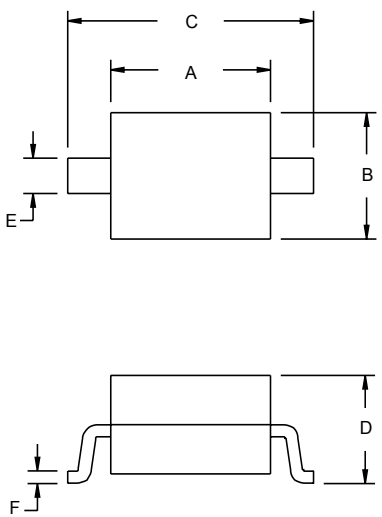


# Protection Products

## Outline Drawing - SOD-323

<p style="text-align: center;"><b>PACKAGE OUTLINE</b></p> 	<p style="text-align: center;"><b>SOD-323 PACKAGE</b></p> 			
<b>PACKAGE DIMENSIONS</b>				
<b>DIM</b>	<b>MILLIMETERS</b>		<b>INCHES</b>	
	<b>MIN</b>	<b>MAX</b>	<b>MIN</b>	<b>MAX</b>
A	1.60	1.90	0.063	0.075
B	1.15	1.45	0.045	0.057
C	2.39	2.70	0.094	0.106
D	0.92	1.10	0.036	0.043
E	0.25	0.40	0.010	0.016
F	0.10	0.20	0.004	0.008
H	-	0.10	-	0.004

<p style="text-align: center;"><b>MOUNTING PAD</b></p> 	<p><b>NOTES</b></p> <ol style="list-style-type: none"> <li>1. Controlling Dimensions in Millimeters.</li> <li>2. Dimensions are exclusive of mold flash and metal burrs.</li> </ol> <p><b>TAPE &amp; REEL ORDERING NOMENCLATURE</b></p> <ol style="list-style-type: none"> <li>1. Surface mount product is taped and reeled in accordance with EIA-481.</li> <li>2. Suffix -T7 = 7 Inch Reel - 3,000 pieces per 8mm tape, i.e., <i>GBLC05C-T7</i>.</li> </ol> <p style="text-align: right; margin-top: 20px;">Outline &amp; Dimensions: Rev 1 - 11/01, 06010</p>
---	--

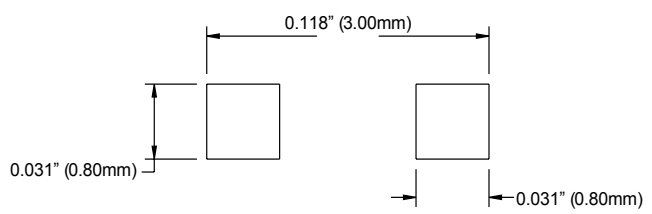RUILONG.YUAN CO.,LTD  
 Tel: +86- 0755-82908296  
 Fax: +86- 0755-82908002

Email: [jack@ruilon.com](mailto:jack@ruilon.com)  
 Website: <http://www.ruilon.com>

RuiLongYuan Electronics are trademarks.

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. RUILONYUAN Electronics reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product. This publication supersedes and replaces all information previously supplied. Without expressed or written consent by an officer of RUILONYUAN Electronics, RUILONYUAN Electronics does not authorize the use of any of its products as components in nuclear facility applications, aerospace, or in critical life support devices or systems. RUILONYUAN Electronics expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. RUILONYUAN Electronics' only obligations are those in the RUILONYUAN Electronics Standard Terms and Conditions of Sale and in no case will RUILONYUAN Electronics be liable for any incidental, indirect, or consequential damages.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Ruilongyuan](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-](#)  
[HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#)  
[MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#) [5KP90A](#)