



瑞隆源电子



TVS/ESD Arrays

RLSD52Axx1C Series

TVS/ESD Arrays - RLSD52Axx1C Series

Features


- 100 Watts Peak Pulse Power per Line ($t_p = 8/20\mu s$)
- Working voltages: 3V, 5V, 8V
- Low Leakage Current
- Low operating and clamping voltages
- Lead Free/RoHS compliant
- Solid-state silicon avalanche technology
- Provides ESD protection to IEC61000-4-2(ESD):
 $\pm 15kV$ (air discharge)
 $\pm 8kV$ (contact discharge);



Mechanical Characteristics

- SOD-523 package
- Molding compound flammability rating: UL 94V-0
- Quantity Per Reel :3,000pcs
- Reel Size : 7 inch
- Lead Finish : Lead Free


Pinout and Functional Block Diagram

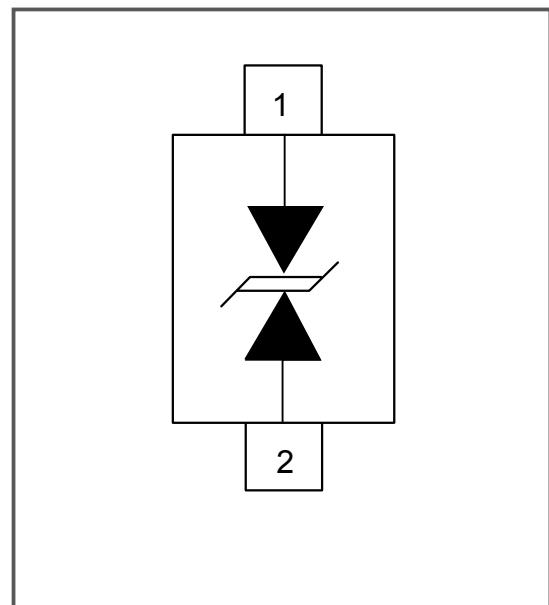

Applications

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Pagers Peripherals

Part Number Code

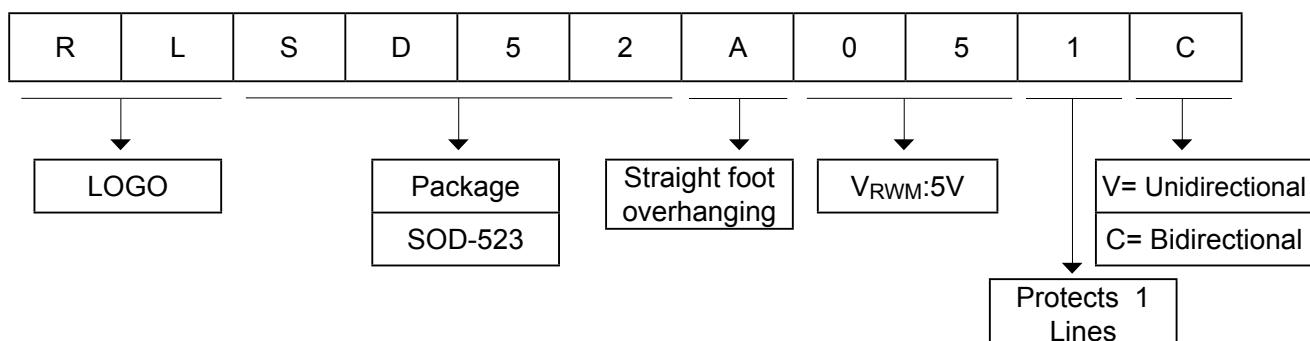


TVS/ESD Arrays - RLSD52Axx1C Series

Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{PK}	100	Watts
ESD Voltage (Contact)	V_{ESD}	± 8	kV
ESD Voltage (Air)	V_{ESD}	± 15	kV
Lead Soldering Temperature	T_L	260 (10 sec.)	°C
Operating Temperature	T_J	-55 to +125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Parameters ($T=25^\circ C$)

Symbol	Parameter
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F

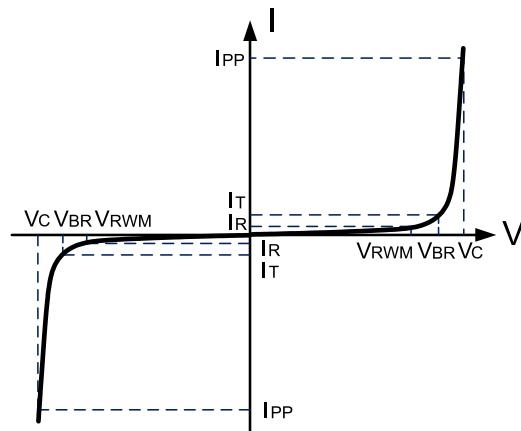

Electrical Characteristics(@ 25°C Unless Otherwise Specified)

Type Number	Reverse Stand-Off Voltage	Minimum Breakdown Voltage	Peak Pulse Voltage @8/20μS	Peak Pulse Current @8/20μS	Reverse Leakage @ V_{RWM}	Typical Capacitance
	V_{RWM}	$V_{BR}@1mA$	$V_C@1A$	I_{PP}	$I_R@V_{RWM}$	$C_J@ 1 MHz$
	V	V	V	A	μA	pF
RLSD52A031C	3.3	4	7	12	1	10
RLSD52A051C	5	6	9.8	14	1	30
RLSD52A081C	8	8.5	17.5	7	1	35

TVS/ESD Arrays - RLSD52Axx1C Series

Characteristic Curves

Fig1. 8/20 μ s Pulse Waveform

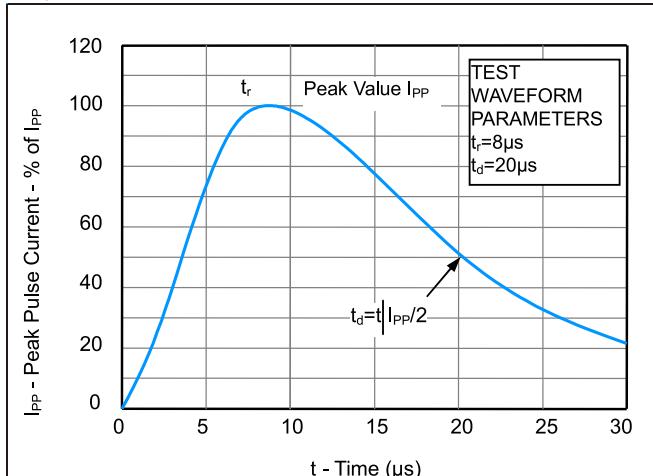


Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)

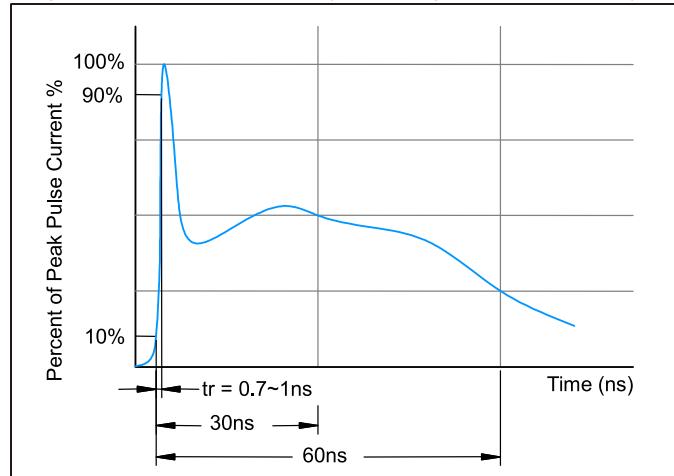


Fig3. Power Derating Curve



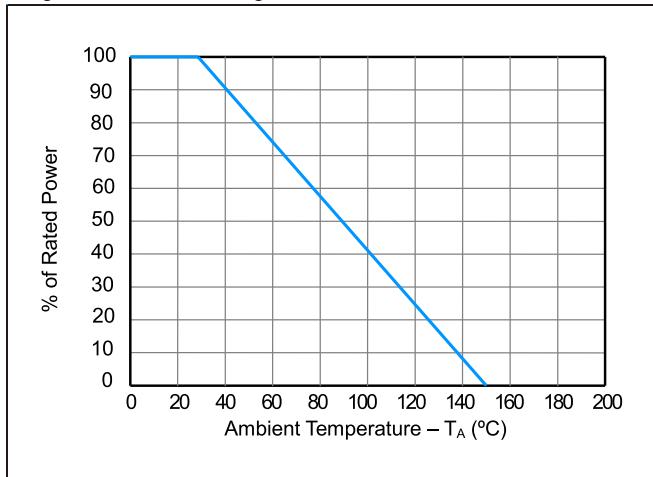


Figure 4: ESD Clamping(8kV Contact per IEC 61000-4-2)

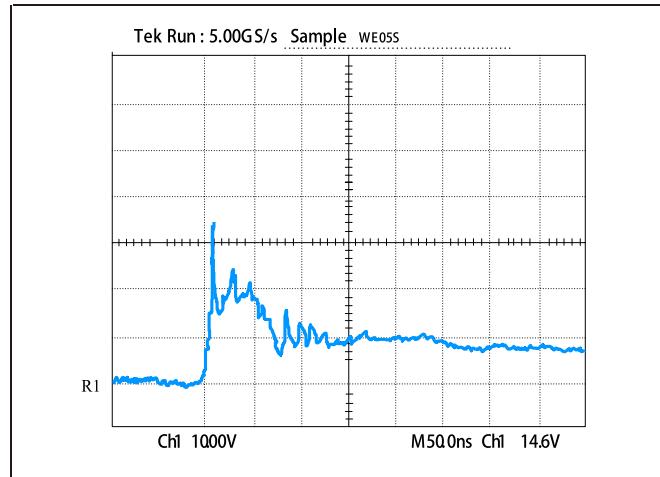

TVS/ESD Arrays - RLSD52Axx1C Series


Recommended Soldering Conditions

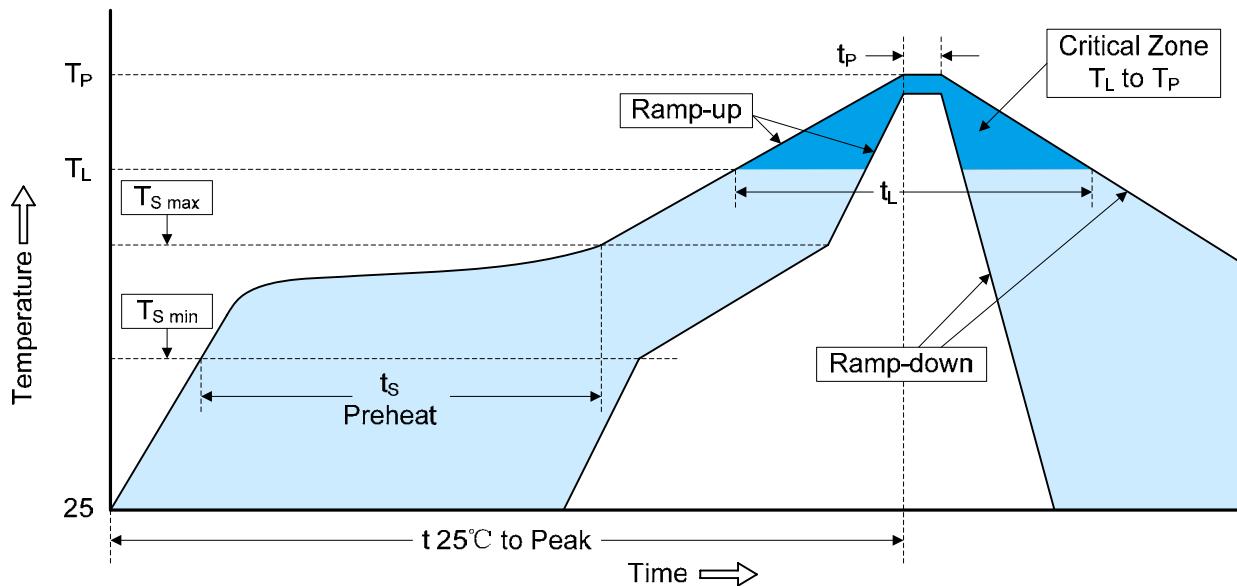

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T_L to T_p)	3°C/second max.
Preheat -Temperature Min (T_s min) -Temperature Max (T_s max) -Time (min to max) (t_s)	150°C 200°C 60-180 seconds
T_s max to T_L -Ramp-up Rate	3°C/second max.
Time maintained above: -Temperature (T_L) -Time (t_L)	217°C 60-150 seconds
Peak Temperature (T_p)	260°C
Time within 5°C of actual Peak Temperature (t_p)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

TVS/ESD Arrays - RLSD52Axx1C Series

Package dimension SOD-523

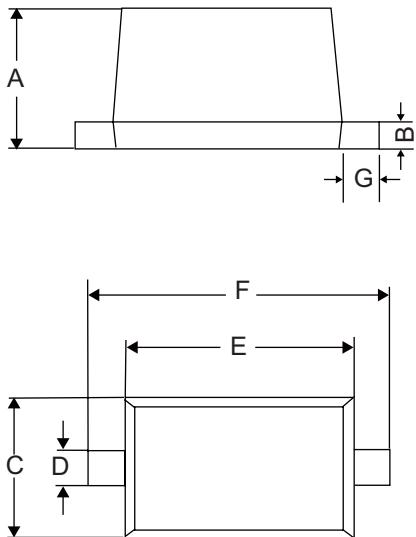

Symbol	Dimensions					
	Inches			Millimeters		
	Min	Nom	Max	Min	Nom	Max
A	0.020	0.024	0.028	0.50	0.60	0.70
B	0.003	0.006	0.008	0.07	0.14	0.20
C	0.028	0.031	0.035	0.70	0.80	0.90
D	0.010	0.012	0.014	0.25	0.30	0.35
E	0.043	0.047	0.051	1.10	1.20	1.30
F	0.059	0.063	0.067	1.50	1.60	1.70
G	0.006	0.008	0.010	0.15	0.20	0.25

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for rui longyuan manufacturer:

Other Similar products are found below :

[2R470TD-8](#) [1.5KE220A](#) [10D821K](#) [5.0SMDJ33CA](#) [14D182K](#) [P6KE12A](#) [SMBJ17CA](#) [NTC12D-7](#) [SMCJ6.0CA](#) [P6KE110A](#) [RL16-200](#)
[SMDJ30CA](#) [2R090SA-5](#) [P6KE68A](#) [SMDJ33CA](#) [SMBJ180CA](#) [RL16-500](#) [RL16-700](#) [10D301K](#) [RL06-110](#) [2R090TA-5](#) [SMAJ170A](#)
[RLVR240-200](#) [RLSD32A241LC](#) [RLSD32A241V](#) [RL600-160](#) [SMD1812P200TF](#) [SMFJ30A](#) [2R800TA-5](#) [P6KE160A](#) [SMCJ58A](#) [2R470TK-8](#)
[HRL60-040](#) [SMCJ75A](#) [14D471K](#) [SMBJ130A](#) [2R230TA-5](#) [SMBJ120CA](#) [SMBJ100A](#) [SMFJ10A](#) [20D102K](#) [SMBJ54CA](#) [05D470K](#)
[SMBJ8.0A](#) [2R470TB-8](#) [2R3000T-8](#) [20D511K](#) [P6KE20CA](#) [SMCJ58CA](#) [2R2500T-8](#)