




# Positive Thermal Coefficient

**RLVR240 Series**

## Positive Thermal Coefficient - RLVR240 Series

Positive Thermal Coefficient devices(PTC),provide over-current protection for electrical and electronic devices.They function using conducting strips of metal imbedded inside polymers.Under normal conditions,the devices resistance is near zero,but over-current conditions will heat the PTC and expand the polymer,increasing the impedance.When current returns to normal,the components cool down,returning to their original shape and very low levels of resistance.

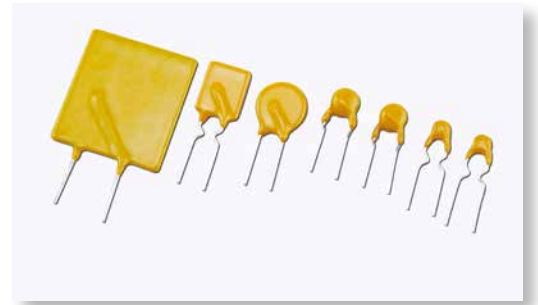


### Features

- I(hold): 0.12~2.0A
- 240VAC Operating voltages
- Radial leaded devices
- Over-current protection
- Very high voltage surge capabilities.
- Available in lead-free version.
- Fast time-to-trip
- RoHS compliant, Lead- Free and Halogen-Free

### Applications


- Overcurrent and overtemperature protection of automotive electronics
- Hard disk drives
- Point-of-sale (POS) equipment
- PCMCIA cards
- Power over Ethernet (POE)
- HDMI 1.4 Source protection
- Computers & peripherals
- Industrial control
- Security systems

### Product Name

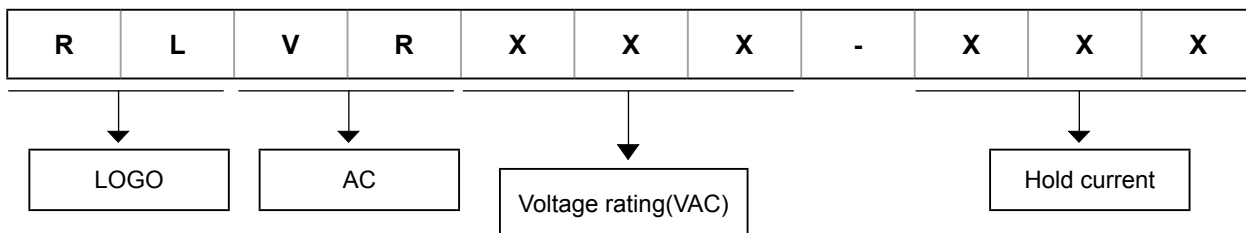

## Positive Thermal Coefficient - RLVR240 Series

### Electrical Characteristics

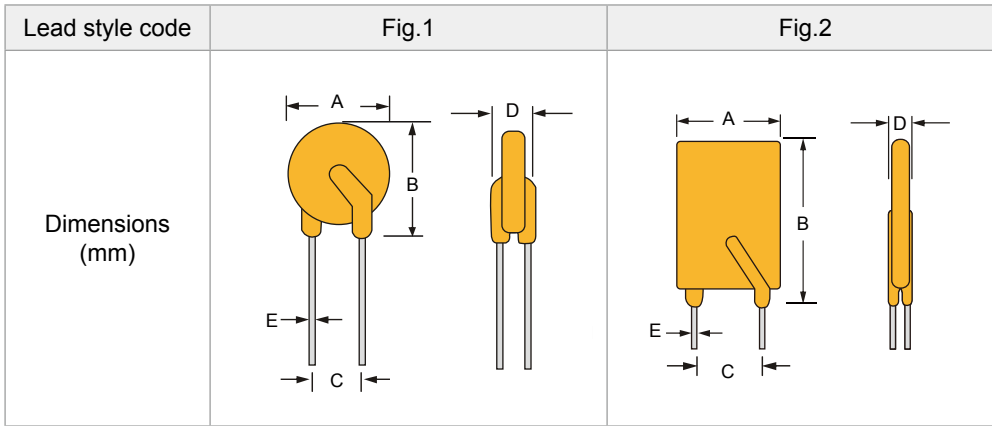

| Type Number | I <sub>hold</sub> | I <sub>T</sub> | V <sub>max</sub> | Time-to-Trip        |                    | I <sub>max</sub> | R <sub>max</sub> | R <sub>min</sub> | Package Dimensions (mm) |         |         |         |         | Circuit Figure |
|-------------|-------------------|----------------|------------------|---------------------|--------------------|------------------|------------------|------------------|-------------------------|---------|---------|---------|---------|----------------|
|             | A                 | A              | V                | I <sub>trip</sub> A | T <sub>max</sub> S | A                | Ω                | Ω                | A (max)                 | B (max) | C (max) | D (max) | E (max) |                |
| RLVR240-012 | 0.12              | 0.24           | AC240            | 0.6                 | 15                 | 10               | 12               | 3                | 8.3                     | 10.7    | 5.1     | 3.8     | 0.8     | Fig.1          |
| RLVR240-016 | 0.16              | 0.38           | AC240            | 0.8                 | 15                 | 10               | 7.8              | 2.5              | 9.9                     | 13.8    | 5.1     | 3.8     | 0.8     | Fig.2          |
| RLVR240-025 | 0.25              | 0.5            | AC240            | 1.25                | 18.5               | 10               | 3.8              | 1.3              | 9.6                     | 18.8    | 5.1     | 3.8     | 0.8     | Fig.2          |
| RLVR240-033 | 0.33              | 0.66           | AC240            | 1.65                | 21.0               | 10               | 2.6              | 0.77             | 11.4                    | 19.0    | 5.1     | 3.8     | 0.8     | Fig.2          |
| RLVR240-040 | 0.4               | 0.8            | AC240            | 2.0                 | 26.0               | 10               | 1.9              | 0.6              | 11.5                    | 19.0    | 5.1     | 3.8     | 0.8     | Fig.2          |
| RLVR240-055 | 0.55              | 1.0            | AC240            | 2.75                | 26.0               | 10               | 1.45             | 0.45             | 14                      | 22.4    | 5.1     | 4.1     | 0.8     | Fig.2          |
| RLVR240-075 | 0.75              | 1.45           | AC240            | 3.75                | 18.0               | 10               | 0.69             | 0.25             | 11.5                    | 23.4    | 5.1     | 4.8     | 0.8     | Fig.2          |
| RLVR240-100 | 1.0               | 2              | AC240            | 5.0                 | 13.6               | 10               | 0.47             | 0.179            | 14.0                    | 19.4    | 5.8     | 5.1     | 0.8     | Fig.1          |
| RLVR240-125 | 1.25              | 2.2            | AC240            | 6.25                | 18.0               | 10               | 0.32             | 0.117            | 14                      | 21.7    | 5.8     | 5.3     | 0.8     | Fig.2          |
| RLVR240-135 | 1.35              | 2.7            | AC240            | 6.75                | 20.0               | 10               | 0.3              | 0.109            | 16.3                    | 21.7    | 5.8     | 4.1     | 0.8     | Fig.2          |
| RLVR240-200 | 2.0               | 4.0            | AC240            | 10.0                | 36.0               | 10               | 0.205            | 0.075            | 20.7                    | 28.5    | 10.2    | 3.5     | 0.8     | Fig.2          |

### Test procedures and requirement

| Test            | Test Conditions                                  | Accept/Reject Criteria                     |
|-----------------|--|--|
| Resistance      | In still air @25°C                               | R <sub>min</sub> ≤ R ≤ R <sub>max</sub>    |
| Time to Trip    | Specified current, V <sub>max</sub> , 25°C       | T ≤ max. Time to trip (T <sub>trip</sub> ) |
| Hold Current    | 30 min, at I <sub>H</sub>                        | No trip                                    |
| Trip Cycle Life | V <sub>max</sub> , I <sub>max</sub> , 100 cycles | No arcing or burning                       |
| Trip Endurance  | V <sub>max</sub> , 24hours                       | No arcing or burning                       |

## Positive Thermal Coefficient - RLVR240 Series

### Manual Soldering Recommendation Parameters

| Items               | Conditions   |
|---------------------|--|
| Soldering condition | The highest power of the manual soldering iron should be 30W or less, soldering temperature should not be higher than 280℃ .   |
| Soldering time      | The soldering time should be kept within 3 seconds, otherwise it might cause insulation layer cracking, and increased part resistance.   |
| Soldering position  | The distance on the leads between the soldering point and bottom of the PPTC body should be equal or greater than 4mm.   |
| Other               | The soldering iron should not contact the PPTC body except the leads. If the soldering conditions are kept to lower temperature, less time and larger distance, the outcome of the soldering will be better. |

Notes: 1. Before using the device must be stored in the original bags, if the storage conditions do not guarantee, the device may not be able to meet the given value.  
 2. The devices can't used for reflow soldering.

### Mechanical Characteristics

| Items            | Specifications    | Test Conditions/Methods          |
|------------------|-------------------|----------------------------------|
| Tensile strength | No visible damage | 1.0Kgf, 10 seconds               |
| Bending strength | No visible damage | 0.5Kgf, 90°, 3 times             |
| Vibration        | No visible damage | Freq: 10-55Hz, Amp: 0.75mm, 1min |

### Mechanical Characteristics

| Items                        | Specifications  | Test Conditions/Methods  |
|------------------------------|---|--|
| Solder ability               | No visible damage, Solder OK, Solder area $\geq 95\%$           | 245±5℃ , 2±1s, dipping depth=0.5inch max from the body                                   |
| Resistance to soldering heat | No visible damage, Electrical OK,   $\Delta R/R0$   $\leq 50\%$ | 260±5℃ , 10+2/-0s  |
| Damp heat, steady state      | No visible damage, Electrical OK,   $\Delta R/R0$   $\leq 20\%$ | 40±2℃ , 90~95 % RH, total 48Hrs, after 4Hrs test electrical parameter                    |
| Temperature cycling          | No visible damage, Electrical OK,   $\Delta R/R0$   $\leq 20\%$ | Ta = -10+0/-1℃ 30min, Ta = 70+1/- 0℃ 30min, 5cycles, after 1hr test electrical parameter |

## RuiLongYuan Electronics Co., Ltd.

---

- Reproducing and modifying information of the document is prohibited without permission from Ruilongyuan International Inc.
- Ruilongyuan International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Ruilongyuan International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Ruilongyuan International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Ruilongyuan International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ruilongyuan International Inc. for any damages resulting from such improper use or sale.

---

**Tel: +86-755-8290 8296**

**Fax: +86-755-8290 8002**

**E-mail: jack@ruilon.com**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Resettable Fuses - PPTC](#) category:*

*Click to view products by [Ruilongyuan](#) manufacturer:*

Other Similar products are found below :

[RF0077-000](#) [RF3256-000](#) [RF3281-000](#) [RF3301-000](#) [RF3341-000](#) [RF3344-000](#) [RF3382-000](#) [SMD125-2](#) [RF2171-000](#) [RF2531-000](#) [RF2873-000](#) [RF3060-000](#) [TR600-150Q-B-0.5-0.130](#) [RXE090](#) [5E4795/04-1502](#) [TRF250-080T-B-1.0-0.125](#) [SMD100-2](#) [NIS5452MT1TXG](#) [NIS5431MT1TXG](#) [SMD250-2](#) [0ZCM0001FF2G](#) [0ZCM0003FF2G](#) [0ZCM0004FF2G](#) [BK60-017-DZ-E0.6](#) [F95456-000](#) [LVR100S](#) [RS30-090](#) [RS30-110](#) [RS30-600](#) [RS30-700](#) [RS30-800](#) [RS30-900](#) [RS60RB-005](#) [RS60RB-010](#) [RS60RB-020](#) [RS60RB-025](#) [RS60RB-050](#) [RS60RB-075](#) [RS60RB-160](#) [RS60SB-250](#) [ASMD0603-010-30V](#) [ASMD0603-025-16V](#) [ASMD2920-260-24V](#) [BSMD0603-025-12V](#) [BSMD1206-150-12V](#) [BSMD0805-020-33V](#) [BSMD1206-075-13.2V](#) [BSMD2920-400-6V](#) [BSMD2920-300-6V](#) [BSMD2920-700-6V](#)