

## Gas Discharge Tubes(GDT)

## SMD4532 Series

### Description

Gas discharge tubes (GDT) use noble gasses enclosed in ceramic tubes to provide an alternate circuit path for voltage spikes. The ceramic envelope and with nickel connectors allow for high loads. SMD4532 Gas Discharge Tubes (GDT) series has a surge rating of 2kA, 8/20 $\mu$ s. Offered in a Squared Surface Mount package, which helps to make pick and place on PCB process easier.

This GDT series is perfectly suited for broadband equipment applications. The GDT's low off-state capacitance is compatible with high bandwidth applications and this capacitance loading value does not vary if the voltage across the GDT changes.

SMD4532 Gas Discharge Tube (GDT) series are specifically designed for protection of electrical, multimedia, and communication equipment against over voltage transients in surface mount assembly applications.

### Features

- I Excellent response to fast rising transients
- I Stable breakdown voltage
- I GHz working frequency
- I 8/20 $\mu$ s Impulse current capability: 2KA
- I Surface Mount package
- I Non-Radioactive
- I Ultra Low capacitance(<0.5pF) and insertion loss
- I Very Small Size(EIA 1812)
- I Storage and operational temperature: -40~+90°C




### Agency Approvals

Agency	Standards	Certificate No.
	UL497B	E465335
	EN 61643-311 IEC 61643-311	J50569381

### Applications

- I Communication equipment
- I CATV equipment
- I Test equipment
- I Data lines
- I Power supplies
- I Telecom SLIC protection
- I Broadband equipment
- I ADSL equipment, including ADSL2+
- I XDSL equipment
- I Satellite and CATV equipment
- I General telecom equipment

### Part Number Code

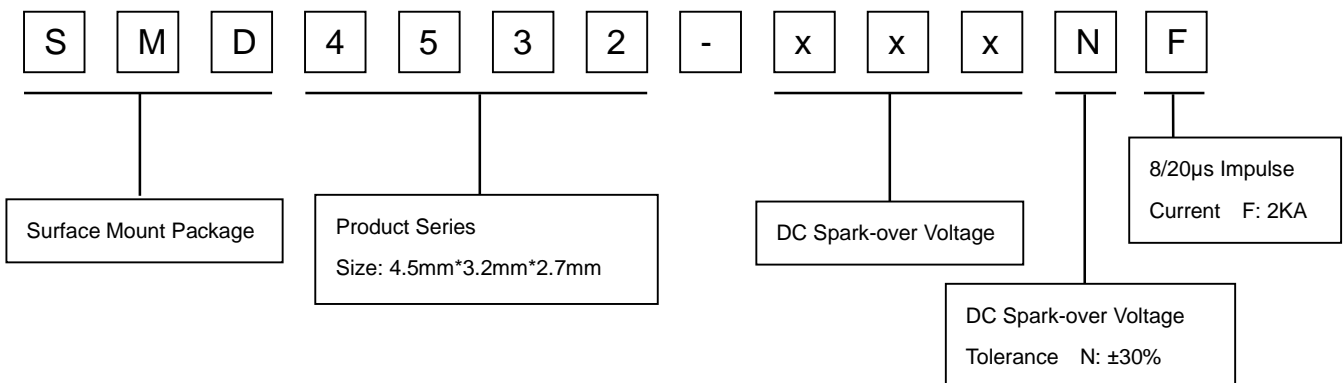

## Gas Discharge Tubes(GDT)

## SMD4532 Series

### Electrical Characteristics

Part Number	DC Spark-over Voltage <sup>1) 2)</sup> @100V/S	Impulse Spark-over Voltage		Insulation Resistance <sup>3)</sup>	Capacitance @1MHz	Glow Voltage @10mA	Arc Voltage @1A	Life Ratings				
		100V/μS	1KV/μS					Impulse Discharge Current @8/20μS		Alternating Discharge Current @50Hz 1S	Impulse Withstanding Voltage Capacity @10/700μS, 40W	Impulse Life @10/1000μS
		Max	Max					±5 times	1 time			
		V	V					V	GΩ	pF	V	V
SMD4532-070NF	70±30%	500	600	1	0.5	60	10	2	3	2	6	10
SMD4532-075NF	75±30%	500	600	1	0.5	60	10	2	3	2	6	10
SMD4532-090NF	90±30%	500	600	1	0.5	60	10	2	3	2	6	10
SMD4532-120NF	120±30%	500	600	1	0.5	60	10	2	3	2	6	10
SMD4532-150NF	150±30%	500	600	1	0.5	60	10	2	3	1	6	10
SMD4532-200NF	200±30%	600	700	1	0.5	60	10	2	3	1	6	10
SMD4532-230NF	230±30%	600	700	1	0.5	60	10	2	3	1	6	10
SMD4532-300NF	300±30%	700	800	1	0.5	60	10	2	3	1	6	10
SMD4532-350NF	350±30%	750	800	1	0.5	60	10	2	3	1	6	10
SMD4532-400NF	400±30%	800	850	1	0.5	135	15	2	3	1	6	10
SMD4532-420NF	420±30%	800	850	1	0.5	135	15	2	3	1	6	10
SMD4532-470NF	470±30%	800	900	1	0.5	135	15	2	3	1	6	10
SMD4532-500NF	500±30%	850	950	1	0.5	135	15	2	3	1	6	10
SMD4532-600NF	600±30%	900	1000	1	0.5	135	15	2	3	1	6	10
SMD4532-800NF	800±30%	1200	1400	1	0.5	135	15	2	3	1	6	10
SMD4532-1000	1000±20%	1400	1600	1	0.5	150	16	2	3	1	6	10
SMD4532-1500	1500±20%	1800	2000	1	0.5	260	20	2	3	1	6	10
Glow to Arc transition Current.....								<0.2A				
Weight.....								~0.20g				
Operation and storage temperature.....								-40~+90°C				
Climatic category (IEC 60068-1).....								40/90/21				
Marking.....								Without				
Surface treatment.....								Matte-tin plated				
Moisture sensitivity level <sup>4)</sup> .....								1				

<sup>1)</sup> At delivery AQL 0.65 level II, DIN ISO 2859.

<sup>2)</sup> In ionized mode.

<sup>3)</sup> Insulation Resistance Measuring Voltage:

75V~150V at DC 50V

Other at DC 100V

<sup>4)</sup> Tests according to JEDEC J-STD-020.

Terms in accordance with ITU-T K.12, IEC 61643-311, GB/T 9043, GB/T18802.311.



Certifications table

Part Number		
	UL497B	EN 61643-311 IEC 61643-311
SMD4532-070NF	--	--
SMD4532-075NF	●	--
SMD4532-090NF	●	--
SMD4532-120NF	--	--
SMD4532-150NF	●	--
SMD4532-200NF	●	--
SMD4532-230NF	●	--
SMD4532-300NF	●	--
SMD4532-350NF	●	--
SMD4532-400NF	●	--
SMD4532-420NF	--	--
SMD4532-470NF	●	--
SMD4532-500NF	--	--
SMD4532-600NF	●	●
SMD4532-800NF	--	--
SMD4532-1000	--	--
SMD4532-1500	--	--

Notes:

- indicates that the product has passed the certification.
- indicates that the product is not certified.

Dimensions

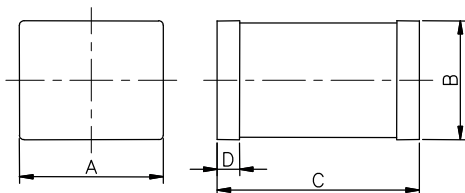

Recommended Soldering Pad Layout


Symbol	Millimeters	Inches
A	3.2±0.2	0.126±0.008
B	2.7±0.2	0.106±0.008
C	4.5±0.3	0.177±0.012
D	0.5±0.1	0.020±0.004
X	1.5	0.059
X1	4.5	0.177
Y	4.2	0.165

## Gas Discharge Tubes(GDT)

## SMD4532 Series

### Packaging Information


#### Tape Specifications

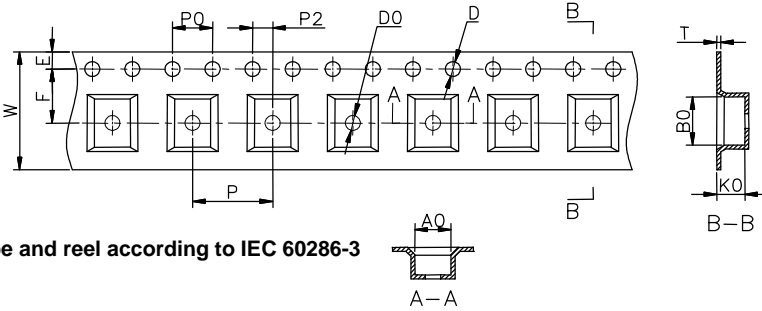

Tape and reel according to IEC 60286-3

Symbol	Millimeters	Inches
W	12±0.3	0.472±0.012
A0	3.5±0.1	0.138±0.004
B0	5.3±0.1	0.209±0.004
K0	2.9±0.1	0.114±0.004
P	8.0±0.1	0.315±0.004
F	5.5±0.1	0.217±0.004
E	1.75±0.1	0.069±0.004
D	1.5+0.1/-0.0	0.059+0.004/-0.0
P0	4±0.1	0.157±0.004
P2	2±0.1	0.079±0.004
T	0.35±0.05	0.014±0.002
D0	13.3±0.15	0.524±0.006
D1	330±2	12.992±0.079
D2	100+1/-2	3.937+0.039/-0.07
W1	12.5±0.4	0.492±0.016

#### Reel Specifications

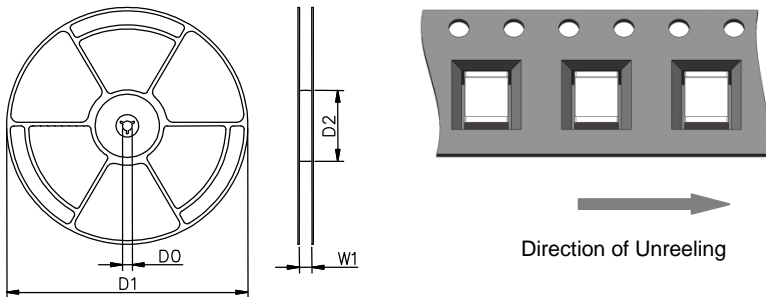


	Reel	Inner Box	Carton
Size	330×17mm	340×333×70mm	375×353×380mm
Quantity	MPQ/MOQ: 1 reel=2,500pcs	1 Inner Box=4 reels=10,000pcs	1 Carton=5 Inner boxes=50,000pcs
Photos			

## Gas Discharge Tubes(GDT)

## SMD4532 Series

### Soldering Parameters - Reflow Soldering (Surface Mount Devices)

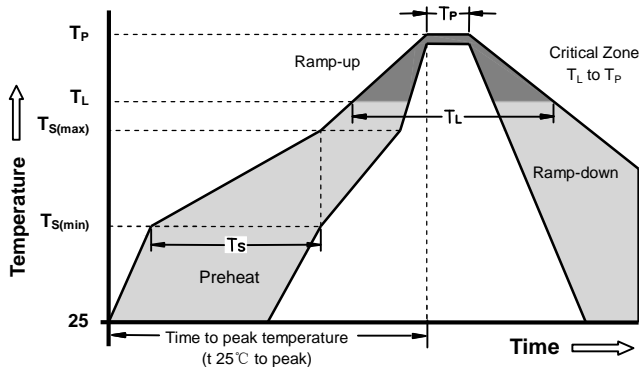

Reflow Condition		Pb - Free assembly
Preheat	-Temperature Min ( $T_{s(min)}$ )	150°C
	-Temperature Max ( $T_{s(max)}$ )	200°C
	- Time (min to max) ( $t_s$ )	60 -180 Seconds
Average ramp up rate ( Liquids Temp $T_L$ ) to peak		3°C/second max
$T_{s(max)}$ to $T_L$ - Ramp-up Rate		5°C/second max
Reflow	- Temperature ( $T_L$ ) (Liquids)	217°C
	- Time (min to max) ( $t_s$ )	60 -150 Seconds
Peak Temperature ( $T_p$ )		260 +0/-5°C
Time within 5°C of actual peak Temperature ( $t_p$ )		10 - 30 Seconds

Surface mounted components (SMD) may exhibit a temporary increase in the DC spark-over voltage after the solder reflow process. The components will recover within 24 hours. There is no quality defect nor change in protection levels during the temporary change in DC spark-over voltage.

### Terms and definitions

NO.	Item	Definitions
1	<b>Gas discharge tube(GDT)</b>	A gap, or several gaps, in an enclosed discharge medium, other than air at atmospheric pressure, designed to protect apparatus or personnel, or both, from high transient voltages. Also referred to as "gas tube surge arrester".
2	<b>DC Spark-over Voltage</b>	The voltage at which the gas discharge tube sparks over with slowly increasing d.c. voltage.
3	<b>Impulse Spark-over Voltage</b>	The highest voltage which appears across the terminals of a gas discharge tube in the period between the application of an impulse of given wave-shape and the time when current begins to flow.
5	<b>Arc voltage</b>	Voltage drop across the GDT during arc current flow.
6	<b>Glow voltage</b>	Peak value of voltage drop across the GDT when a glow current is flowing.
7	<b>Impulse discharge current 8/20µs</b>	Current impulse with a nominal virtual front time of 8 µs and a nominal time to half-value of 20 µs.
8	<b>Alternating Discharge Current</b>	The rms value of an approximately sinusoidal alternating current passing through the gas discharge tube.
9	<b>Insulation Resistance</b>	Insulation resistance shall be measured from each terminal to every other terminal of the GDT. The test is performed with DC50V when normal spark-over Voltage 70~150V, others with DC100V.
10	<b>Capacitance</b>	The capacitance shall be measured once at 1 MHz between all terminals unless otherwise specified.

**Cautions and warnings**

- I Do not operate surge arresters in power supply networks, whose maximum operating voltage exceeds the minimum spark-over voltage of the surge arresters.
- I Surge arresters may become hot in the event of longer periods of current stress (burn risk). In the event of overload the connectors may fail or the component may be destroyed.
- I Surge arresters must be handled with care and must not be dropped.
- I Do not continue to use damaged surge arresters.
- I The shown SMD pad dimensions represent a safe way to mount the arrester and are a recommendation of the manufacturer. During the reflow process it must be assured that no solder material reduces the insulation distance between the pads below the arrester.
- I SMD surge arresters should be soldered within 24 month after shipment.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Gas Discharge Tubes - GDTs / Gas Plasma Arrestors](#) category:*

*Click to view products by [Ruilongyuan](#) manufacturer:*

Other Similar products are found below :

[PMT1023004](#) [PMT1025001](#) [RF3161-000](#) [PMT1035004](#) [PMT1040004](#) [PMT809006](#) [CG2250](#) [CG2800](#) [CG31.5L](#) [GT-SMD181240012-TR](#)  
[WPGT-2N145B6L](#) [WPGT-2N230B6L](#) [WPGT-2N470B6L](#) [WPGT-2R470B6L](#) [WPGT-2RM230A6L](#) [WPGT-2RM350A6L](#) [WPGT-](#)  
[2RM70A6L](#) [WPGT-2RM90A6L](#) [WPGT-2S145](#) [WPGT-2S350](#) [WPGT-2S470](#) [WPGT-3R350CF](#) [WPGT-3R350G1](#) [WPGT-3R90G1](#) [WPGT-](#)  
[3R75G1](#) [WPGT-3R470G1](#) [WPGT-3R250C](#) [WPGT-3R230G1](#) [WPGT-2S230](#) [WPGT-2RM470A6L](#) [WPGT-2RM145A6L](#) [WPGT-2R3000B8L](#)  
[WPGT-2R2700B8L](#) [WPGT-2R1000B8L](#) [WPGT-2N90B6L](#) [WPGT-2N70B6L](#) [WPGT-2N350B6L](#) [WPGT-2N230B6L1](#) [CG90](#) [CG2230](#)  
[CG2145](#) [CG21000](#) [GT-SMD181215012-TR](#) [B88069X6940B152](#) [V20-1+NPE-280](#) [V20-3+NPE+FS-280](#) [SD09-V24 9](#) [C50-0-255](#)  
[SG24PA300](#) [A9L40500](#)