

(1.00 mm) .0394"

**MB1 SERIES** 

# **EDGE CARD SOCKET WITH GUIDES**

#### **SPECIFICATIONS**

For complete specifications and recommended PCB layouts see www.samtec.com?MB1

Insulator Material: Black LCP

Contact Material:

BeCu

Plating: Sn or Au over 50 μ" (1.27 μm) Ni Current Rating:

2.2 A per pin

(6 pins powered)

Operating Temp Range:
-55 °C to +125 °C

Insertion Depth:

(5.26 mm) .207" to (6.10 mm) .240"

**RoHS Compliant:** 

#### **PROCESSING**

Lead-Free Solderable:

SMT Lead Coplanarity:

(0.10 mm) .004" max (20-30) (0.15 mm) .006" max (40-50) (.004" sténcil solution may be available; contact IPG@samtec.com)

### **RECOGNITIONS**

For complete scope of recognitions see www.samtec.com/quality





#### ALSO AVAILABLE (MOQ Required)

· Other platings

#### Mates with:

(0.80 mm) .031" PCB, (1.60 mm) .062" PCB

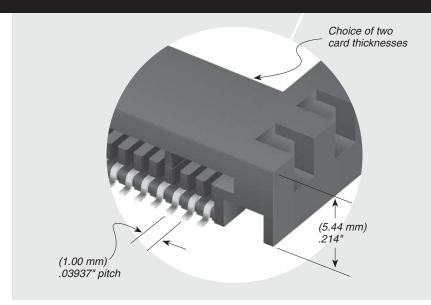

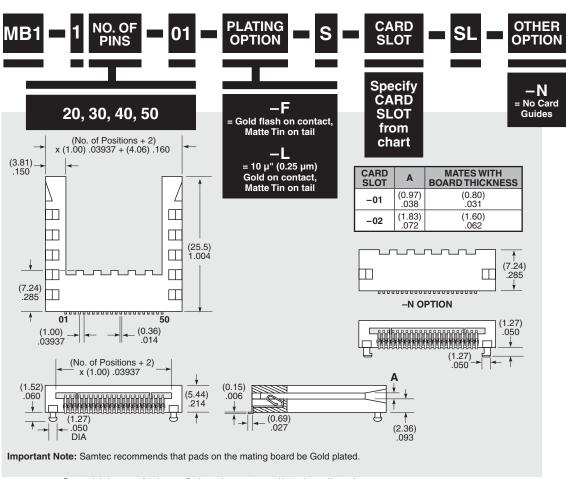

#### Notes:

Some sizes, styles and options are non-standard, non-returnable.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Standard Card Edge Connectors category:

Click to view products by Samtec manufacturer:

Other Similar products are found below:

6565204-6 PKC-156 1437274-4 147889-1 1489165-4 EBT156-12B1X EBT15622B2X EBT156-22R2W 1-582587-1 1-582589-1 2-6437275-9 284-0102-12100 306022901000000 307-012-502-202 307-024-526-201 307-056-520-300 307-080-526-208 245-062-520-350 287-0032-12101 306-010-500-112 306-028-525-102 306-240-318 307-036-502-202 307-036-521-301 307-072-526-202 345-060-559-303 368-004-520-201 392-008-559-201 534671-1 5-530501-5 341-240-317 345-029-520-300 345-030-500-301 345-044-500-300 345-220-058 346-240-318 357-030-526-201 387-012-523-300 395-044-520-300 395-100-524-300 50-12B-10 50-6SN-5 09-07-2032 10035388-106LF 10035388-802LF 10122859-009LF 10127905-B04B24BLF 530555-1 EBT156-15A2X 2007209-1