


TIGER CLAWTM PASS-THROUGH SOCKET

(2.54 mm) .100" PITCH • BCS SERIES

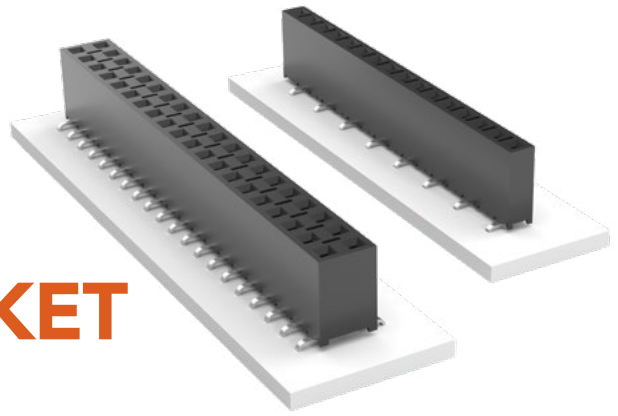

BCS

Mates:

TSW, MTSW, HTSW,
HMTSW, TSS, ZSS, DW, EW,
ZW, HW, TSM, MTLW, PHT

SPECIFICATIONS

Insulator Material:

Black Liquid Crystal Polymer

Contact Material:

Phosphor Bronze

Plating:

Au or Sn over
50 μ " (1.27 μ m) Ni

Current Rating (BCS/TSW):

4.6 A per pin
(2 pins powered)

Voltage Rating:

475 VAC
(-TE/-DE/-PE mated with TSM)
450 VAC
(-HE mated with TSW)

Operating Temp Range:

-55 °C to +125 °C

Insertion Depth:

(4.34 mm) .171" to
(7.24 mm) .285" from top,
(5.64 mm) .222" plus board
thickness minimum from bottom.
-HE is (4.34 mm) .171"
to (6.35 mm) .250"

PROCESSING

Lead-Free Solderable:

Yes

ALSO AVAILABLE

Other Platings
(MOQ Required)

BCS	1	NO. PINS PER ROW	PLATING OPTION	ROW OPTION	ENTRY OPTION	OTHER OPTION
-----	---	------------------	----------------	------------	--------------	--------------

01 thru 50

-F
= Gold flash
on contact,
Matte Tin on tail

-L
= 10 μ " (0.25 μ m)
Gold on contact,
Matte Tin on tail

-S
= Single

-D
= Double




-TE
= Top Entry

-DE
= Top Entry
(For Bottom Entry
specify -DE-BE)
Cannot be used with
plated through-holes

-PE
= Pass-through Entry
(For Bottom Entry
specify -PE-BE)

-HE
= Horizontal Entry





-"XXX"
= Polarized Position
(-BE not available)

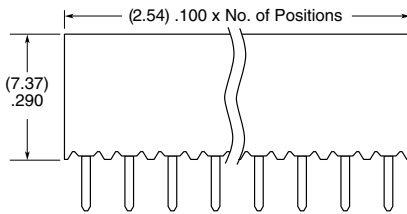

-TE

-DE

-PE

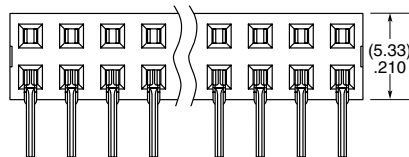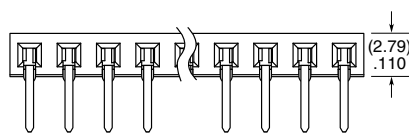

-HE

Note:

Some lengths, styles and
options are non-standard,
non-returnable.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) *category:*

Click to view products by [Samtec](#) *manufacturer:*

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68684-306](#) [75140-7012](#) [589159005003045](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [589159005002045](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#)