


RUGGED RELIABLE MICRO SOCKETS

(1.00 mm) .0394" PITCH • CLM/MLE SERIES

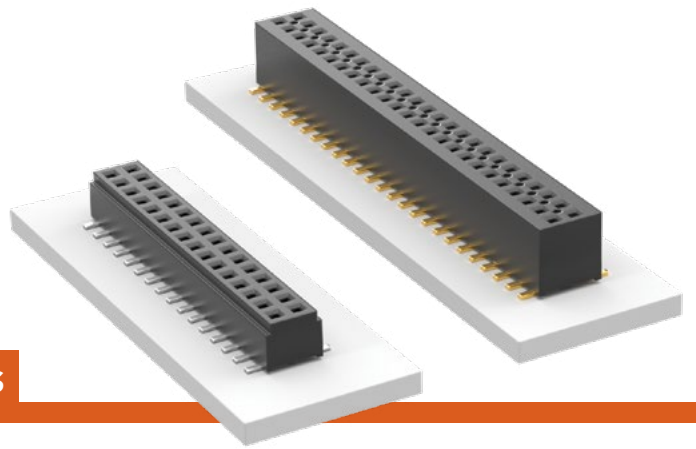

CLM

Mates:
FTM, FTMH, MW

MLE

Mates:
FTM, FTMH, MW

SPECIFICATIONS

Insulator Material: Black LCP
Contact Material:
 CLM: Phosphor Bronze
 MLE: BeCu
Plating:
 CLM: Au or Sn over
 50 μ " (1.27 μ m) Ni
 MLE: Au over 10 μ " (0.25 μ m) Ni
Current Rating (CLM/FTM):
 2.8 A per pin
 (2 pins powered)
Current Rating (MLE/FTM):
 2.9 A per pin (2 pins powered)
Operating Temp Range:
 -55 °C to +125 °C
Max Cycles:
 CLM: 100 with 10 μ " (0.25 μ m) Au
Voltage Rating:
 MLE: 310 VAC
Insertion Depth:
 CLM:
 Top Entry = (1.40 mm) .055" min.,
 Bottom Entry =
 (2.41 mm) .095" min.
 (Add board thickness for
 correct post OAL)
 MLE:
 (1.63 mm) .064" to
 (3.18 mm) .125" with
 (0.38 mm) .015" wipe,
 pass-through, or (2.44 mm) .096"
 minimum for bottom entry
Normal Force:
 CLM: 40 grams (0.39 N) average



02 thru 50

-F
= Gold flash on contact,
Matte Tin on tail

-L
= 10 μ " (0.25 μ m)
Gold on contact,
Matte Tin on tail

-BE
= Bottom Entry
(Required for bottom entry)


-K
= (3.50 mm) .138" DIA
Polyimide film
Pick & Place Pad
(7 positions minimum)

-P
= Pick & Place Pad
(7 positions minimum)


-PA
= Pick & Place Pad with
integral Alignment Pin

-TR
= Tape & Reel


-FR
= Full Reel Tape & Reel
(must order maximum
quantity per reel;
contact Samtec for
quantity breaks)

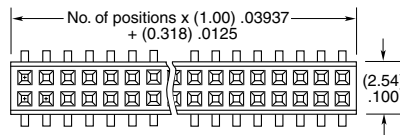

PIN/ROW	A
04-15	(3.56) .140
16-50	(7.11) .280



-PA



-P

PROCESSING

Lead-Free Solderable:
Yes
SMT Lead Coplanarity:
 (0.10 mm) .004" max (02-25)
 (0.15 mm) .006" max (26-50)*
 *(.004" stencil solution
 may be available; contact
 ipg@samtec.com)

ALSO AVAILABLE
MOQ Required

Alignment pin
Other Gold plating options



Note:
Some lengths, styles and
options are non-standard,
non-returnable.



02 thru 50

-G
= 10 μ "
(0.25 μ m)
Gold



-A
= Alignment Pin
(3 positions minimum)
Metal or plastic
at Samtec discretion

-K
= (4.00 mm) .1575" DIA
Polyimide film
Pick & Place Pad
(5 positions minimum)

-P
= Metal Pick & Place Pad
(5 positions minimum)

-TR
= Tape & Reel

-FR
= Full Reel Tape & Reel
(must order maximum
quantity per reel;
contact Samtec for
quantity breaks)

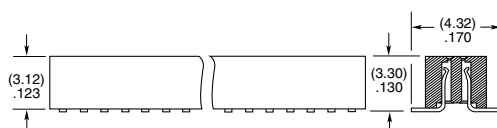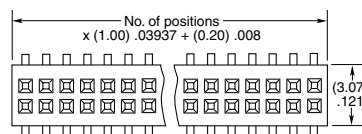

-P

-A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68684-306](#) [75140-7012](#) [589159005003045](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [589159005002045](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#)