




ACCLIMATE™

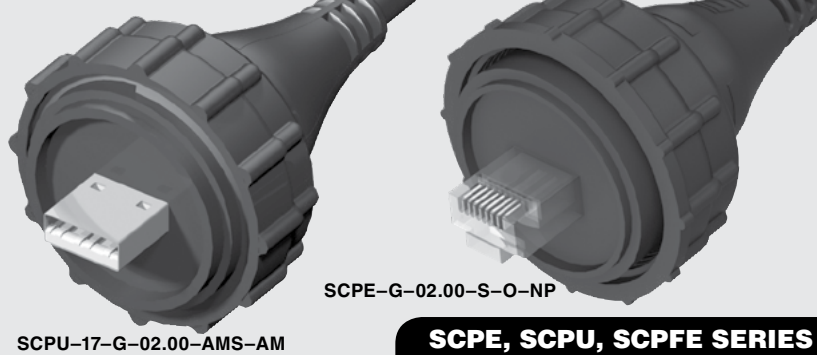

SCPE-G-02.00-S-O-NP

SCPU-17-G-02.00-AMS-AM

SCPE, SCPU, SCPFE SERIES

# IP68 SEALED USB & ETHERNET PLUGS

Mates with:  
SCRES

## SPECIFICATIONS

For complete specifications see [www.samtec.com?SCPE](http://www.samtec.com?SCPE)

**Insulator Material:** Polycarbonate  
**Contact Material:** Phosphor Bronze  
**Shield Material:** Phosphor Bronze  
**Wire:** 24 AWG  
**Overmold:** PA66 GF13 FR  
**Current Rating:** 3.8 A per pin (1 pin powered)  
**Operating Temp Range:** -40 °C to +70 °C  
**RoHS Compliant:** Yes

## DUST CAP

- DCA-17-02

**Note:**  
Some lengths, styles and options are non-standard, non-returnable.

TYPE	PLATING	WIRE LENGTH	END OPTION	O	NP
<b>SCPE</b> = Sealed Circular Ethernet Cable Plug	<b>-G</b> = 50 μ" (1.27 μm) Gold on Contact, Nickel on Shell	<b>-01.00</b> = (1 m) 39" Cable <b>-02.00</b> = (2 m) 79" Cable Standard lengths	<b>-D</b> = Double Ended (Both Ends Sealed) <b>-S</b> = Single Ended (End No. 1 Sealed)	<b>-O</b> = Outdoor Rated	<b>-NP</b> = Cat 5e (No polarization mates with SCRES -C5E)

## FIELD TERMINATION KIT

- Ethernet Field Termination Kit available for long cable run and small-opening applications so housings can be customer-installed after the runs are complete.
- SCPFE-17-G-01 Series (For cable outside diameter range of 5.00-5.75 mm)
- SCPFE-17-G-02 Series (For cable outside diameter range of 5.75-6.50 mm)

## ALSO AVAILABLE (MOQ Required)

- Other wire lengths

Mates with:  
SCRUS

## SPECIFICATIONS

For complete specifications see [www.samtec.com?SCPU](http://www.samtec.com?SCPU)

**Insulator Material:** Glass Filled Thermoplastic  
**Contact Material:** Copper Alloy  
**Shield Material:** CRS  
**Wire:** 20 AWG (Power), 25 AWG (Signal), 28 AWG (Drain)  
**Sealed Overmold:** PA66 GF13 FR  
**Operating Temp Range:** -20 °C to +75 °C  
**RoHS Compliant:** Yes

SCPU	SHELL SIZE	PLATING	WIRE LENGTH	END 1 OPTION	END 2 OPTION
<b>-17</b> (Standard USB only)	<b>-G</b> = 30 μ" (0.76 μm) Gold on Contact, Nickel on Shell	<b>-AMS</b> = USB A Type, Sealed <b>-BMS</b> = USB B Type, Sealed	<b>-01.00</b> = (1 m) 40" Cable <b>-02.00</b> = (2 m) 79" Cable Standard lengths (Assembled Length = Wire Length + (19.5 mm) .77")	<b>-AM</b> = USB A Type, Not Sealed	

## ALSO AVAILABLE (MOQ Required)

- Other wire lengths
- Other end options

## DUST CAPS & PANEL PLUG

- Dust Caps: DCA-17-01
- Panel Plug: SCPPA-17-01

**Note:**  
Some lengths, styles and options are non-standard, non-returnable.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Circular MIL Spec Tools, Hardware & Accessories](#) *category:*

*Click to view products by* [Samtec](#) *manufacturer:*

Other Similar products are found below :

[0113-201-2025](#) [600-079-06](#) [600-146-06](#) [M10-101982-143](#) [M10-101982-163](#) [M10-101983-183](#) [M10-454396-008](#) [602GB18808](#) [6134-333-1990](#) [6134-334-1590](#) [6134-334-2190](#) [CS3102A-22-14PW](#) [M2887615-CD](#) [627-009](#) [M38999/9-19B](#) [630A007NF083A](#) [630B007M051A](#) [630BJ003NF032H](#) [637-149NF04B](#) [M39029/29-215](#) [6408-203V-09273](#) [6426-201-11343](#) [650FS002NF16](#) [660-008NF14S7-01](#) [660-009M22H8-03](#) [660-013NF19U6-210](#) [660-015M10S6-17](#) [660-015NF10S5-01](#) [660-015NF14R3.5-01](#) [660-023NF19H6-19](#) [660-024NF11S12-01](#) [660-024NF11S3-01](#) [660-024NF17S4-109](#) [660-050XM17F4-01](#) [660-068NF25R6-30G](#) [660-070M23S8-04](#) [660-073MTCH9-20](#) [M83723/61-18W](#) [M83723/61-218R](#) [M83723/61-224W](#) [667-084-23C](#) [667-084-35C](#) [667-224NF16](#) [687-697NF-1](#) [M85049/94-10-A](#) [M85049/96-7-A](#) [M855282-10A01A](#) [M85528/2-10B](#) [M855282-18A01A](#) [M85528/2-22A01A](#)