

(1.27 mm) .050"

TIGER EYE" FLAT IDC WIRE CABLES

Mates with: FLE*, SFMC*

Transfer End Option Mates with: FTS, FTSH, EHF, SHF, ESHF

SPECIFICATIONS

For complete specifications see www.samtec.com?FFMD

Insulator Material: Black Glass Filled Polyester Terminal: Phosphor Bronze Contact: BeCu (-T)

Plating: Sn over 50µ" (1.27 µm) Ni Wire: 30 AWG Current Rating:

2.5 A per pin (1 pin powered) Operating Temp Range: -40°C to +105°C

Voltage Rating: 215 VAC 304 VDC RoHS Compliant:

RoHS Compliant: Yes

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality




ALSO AVAILABLE (MOQ Required)

Other sizes
 Contact Samtec.

*Note: Standard FFMD callout will not mate with FLE, SFMC. Must use gold plated callouts. (See drawing on web.) When mated with a socket, Wire 1 mates with Pin 2; Wire 2 mates with Pin 1, etc.

Note: This Series is non-standard, non-returnable.

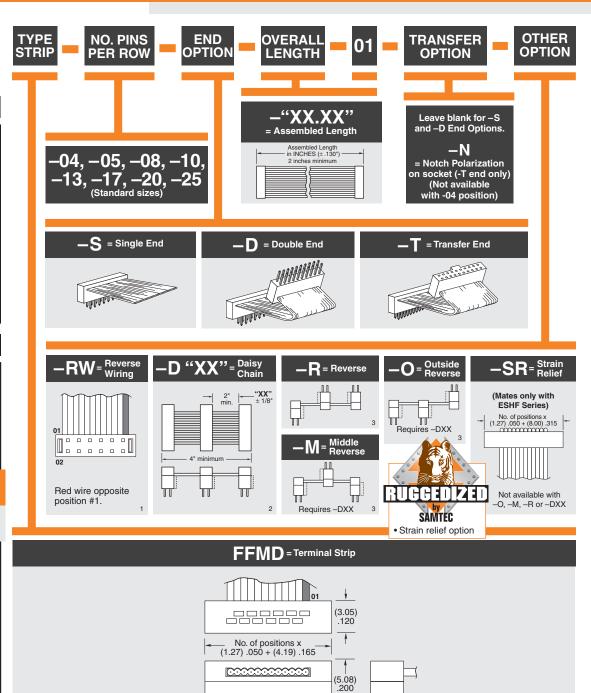

(3.07) .121

→ (0.41) .016 SQ

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for FFC & FPC Connectors category:

Click to view products by Samtec manufacturer:

Other Similar products are found below:

HFW11R-1STE1H1LF FH29B-100S-0.2SHW(99) FA5S008HP1 FH29B-120S-0.2SHW(99) FH29B-80S-0.2SHW(99) FHS-16 FPH-2022G
52610-1075 52610-1275 52610-1934 XF3M(1)-1415-1B-R100 501864-3091-TR225 0525594033 086210010340800 086222026001800
52271-2869-CUT-TAPE 62674-201121DLF 62684-36210E9ALF 52610-1675 52746-1671-TR250 10051922-2810EHLF 6-520415-9
BD021-09A-A1-0350-0200-0550-LD SFV6R-1STE9HLF XF3M-2915-1B-R100 1658549-1 62674-221121ALF 46214008010800
046298003000883 151660622 842-816-2630-035 AYF530665TA AYF351525 046296011930846+ AYF352325A 046254020000800+
FH19C-13S-0.5SH(99) FH39J-51S-0.3SHW(99) AYF355125A AYF530365TA FH29B-44S-0.2SHW(99) SFW5R-2STAE9LF AYF351125A
AYF350725A 62684-502100AHLF FH39-61S-0.3SHW(99) AYF414035A 10064555-172520HLF AYF212335A 504754-2500