

(1.27 mm) .050"

FTSH SERIES

# THROUGH-HOLE MICRO HEADER

## SPECIFICATIONS

For complete specifications see [www.samtec.com?FTSH](http://www.samtec.com?FTSH)

**Insulator Material:** Black Liquid Crystal Polymer  
**Terminal Material:** Phosphor Bronze  
**Plating:** Sn or Au over 50 μm (1.27 μm) Ni  
**Current Rating (FTSH/CLP):** 3.4 A per pin (2 pins powered)  
**Operating Temp Range:** -55 °C to +125 °C  
**RoHS Compliant:** Yes

## PROCESSING

**Lead-Free Solderable:** Yes


## RECOGNITIONS

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)



## LOCKING CLIP

For single mating cycle with the FFSD. Specify -LC after tail option. Lead Style -01 and 10 pins/row minimum. 5-9 pins/row not available in combination with keying shroud (-K).



## ALSO AVAILABLE (MOQ Required)

- Molded Pick & Place pads
- Other platings

**Notes:** See SFM/TFM for positive alignment feature.


Some sizes, styles and options are non-standard, non-returnable.

**Board Mates:** CLP, FLE

**Cable Mates:** FFSD, FFTP

Impedance matched for high-speed applications (Mated with CLP Series)

Mates with socket strips or IDC cable

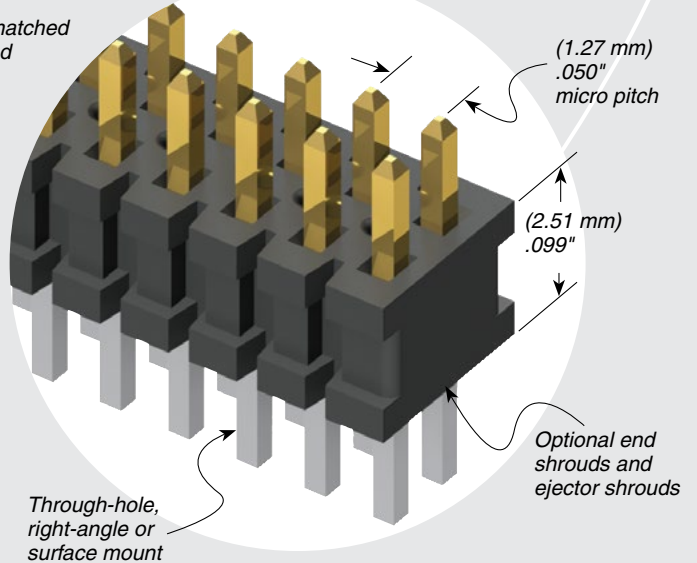

## HIGH-SPEED CHANNEL PERFORMANCE

Rating based on Samtec reference channel. For full SI performance data visit [Samtec.com](http://Samtec.com) or contact [SIG@samtec.com](mailto:SIG@samtec.com)

8 Gbps

FTSH	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	D	OPTION	TAIL OPTION	OTHER OPTIONS
02 thru 50		Specify LEAD STYLE from chart		-F = Gold flash on post, Matte Tin on tail		Leave blank for Right-angle -“XXX” = Polarized Position (Specify position of omitted pin) (Not available with -EX options)	Leave blank for straight tail -RA = Right-angle	-ES = End Shroud (Style -02 & -03) 9 pins/row min. -EP = End Shroud with Guide Post (Style -02 & -03) 9 pins/row min. -EL = End Shroud with Board Lock (Style -02 & -03) 9 pins/row min. -EJ = Ejector Shroud (Style -01 only) 10 pins/row min. 25 pins/row max. -RA not available -K = Keying Shroud for mating with FFSD (Style -01 only, 05, 08, 10, 13, 15, 17, 20 & 25 pins/row only and 13, 17, 20 & 25 only with -EJ option)

LEAD STYLE	A	MATES WITH	OPTION	Z
-01	(3.05) .120	FFSD	-ES	(1.55) .061
-02	(1.91) .075	FLE	-EJ	(15.77) .621
-03	(1.65) .065	CLP-D	-EP	(5.87) .231
-04	(3.81) .150	N/A	-EL	(6.53) .257

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Samtec](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)