




(1,27 mm) .050"

FW SERIES

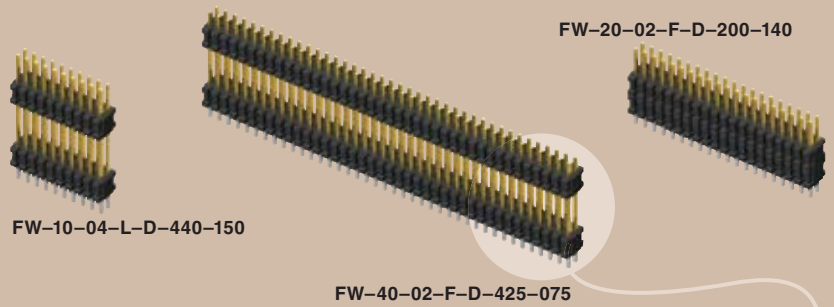

THROUGH-HOLE MICRO BOARD STACKER

SPECIFICATIONS

For complete specifications see www.samtec.com?FW-TH

Insulator Material:

Black Liquid Crystal Polymer

Terminal Material:

Phosphor Bronze

Plating:

Sn or Au over 50µ" (1,27 µm) Ni

Current Rating:

1.75A per contact @ 80°C ambient

Operating Temp Range:

-55°C to +125°C


RoHS Compliant:

Yes



Mates with: CLP, FFSD, FLE

Low profile or skyscraper styles

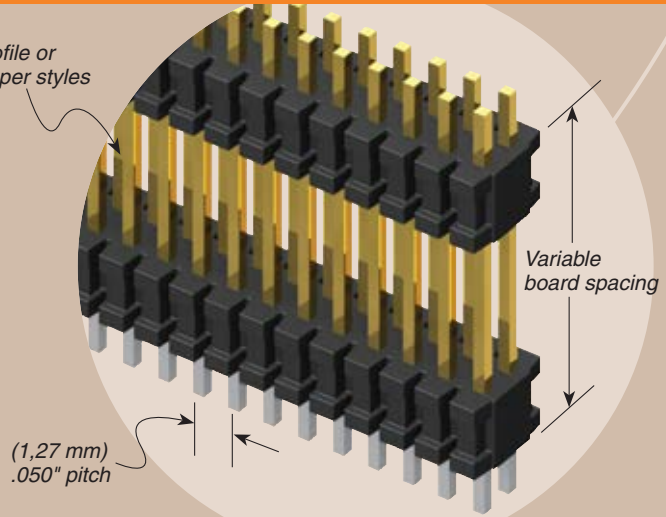

ALSO AVAILABLE

- Smaller stack heights. Call Samtec.

Note: For added mechanical stability, Samtec recommends mechanical board spacers be used in applications with gold or selective gold plated connectors. Contact ipg@samtec.com for more information.

Note: This Series is non-standard, non-returnable.

Processing:
Lead-Free Solderable:
Yes



www.samtec.com

FW	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	D	STACKER HEIGHT	POST HEIGHT	OPTION
	02 thru 50	Specify LEAD STYLE from chart	-F = Gold flash on post, Matte Tin on tail -L = 10µ" (0,25 µm) Gold on post, Matte Tin on tail -G = 10µ" (0,25 µm) Gold on post, Gold flash on tail		-"XXX" = Stacker Height (in inches) Example: -250 = (6,35 mm) .250"	-"XXX" = Post Height (in inches) (1,65 mm) .065" minimum Example: -065 = (1,65 mm) .065"	-ES = End Shroud (-075 post height only. Mates only with CLP.) (5,46 mm) .215" to (15,49 mm) .610" stacker height only, 9 pins/row minimum -EP = End Shroud with Guide Post (-075 post height only. Mates only with CLP.) (5,46 mm) .215" to (15,49 mm) .610" stacker height only, 9 pins/row minimum

LEAD STYLE	TAIL (B)
-01	(1,14) .045
-02	(1,91) .075
-04	(2,29) .090

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68684-306](#) [75140-7012](#) [589159005003045](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [589159005002045](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#)