


SW-10-04-T-S-350-150

HFWS-06-02-T-S-RA

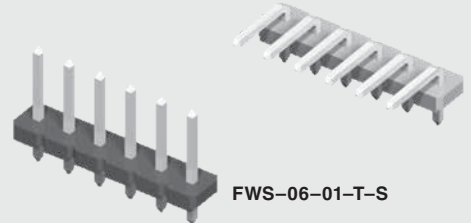

FWS-06-01-T-S

(5.08 mm) .200"

FWS, HFWS, SW SERIES

POWER TERMINAL STRIP

FWS, HFWS Mates with:
PSS, HPF
SW Mates with:
PSS, HPF

SPECIFICATIONS

For complete specifications see www.samtec.com?FWS
www.samtec.com?HFWS or
www.samtec.com?SW

Insulator Material:

Glass Filled Polyester (FWS, SW-TH)
Liquid Crystal Polymer (HFWS, SW-VS)

Terminal Material:

Phosphor Bronze

Plating:

Sn over 50 μ" (1.27 μm) Ni
Current Rating (FWS/PSS):
11.4 A per pin
(1 pin powered)

Operating Temp Range:

-55 °C to +105 °C

Voltage Rating:

500 VAC mated with PSS

RoHS Compliant:

Yes

PROCESSING

Lead-Free Solderable

(HFWS-VS, SW-VS):

Yes

SMT Lead Coplanarity

(FWS, HFWS):

(0.20 mm) .008" max (02-15)*

(0.25 mm) .010" max (16-20)*

SMT Lead Coplanarity (SW):

(0.25 mm) .010" max*

*(.004" stencil solution may be available; contact IPG@samtec.com)

RECOGNITIONS

For complete scope of recognition see www.samtec.com/quality



FILE NO. E111594

Note:
Some lengths, styles and options are non-standard, non-returnable.

TYPE STRIP	NO. PINS	LEAD STYLE	PLATING OPTION	S	TAIL OPTION	OTHER OPTION																																								
FWS = Standard Header																																														
HFWS = High Temp Header																																														
Specify LEAD STYLE from chart below.			-T = Matte Tin		-VS-P = Surface Mount with Pick & Place Pad (3 Pos. min.) (6.98 mm) .275" min. post height																																									
01 thru 20					Leave blank for Through-hole																																									
			<table border="1"> <thead> <tr> <th>LEAD STYLE</th> <th>A</th> <th>B</th> <th>C</th> <th>D</th> <th>E</th> <th>F</th> <th>G</th> </tr> </thead> <tbody> <tr> <td>-01</td> <td>(4.57) .180</td> <td>(11.94) .470</td> <td>—</td> <td>—</td> <td>—</td> <td>(10.72) .422</td> <td>(8.64) .340</td> </tr> <tr> <td>-02</td> <td>(4.57) .180</td> <td>(13.21) .520</td> <td>(2.54) .100</td> <td>(4.57) .180</td> <td>(8.08) .318</td> <td>(12.24) .482</td> <td>(8.38) .330</td> </tr> <tr> <td>-04</td> <td>(4.09) .161</td> <td>(21.06) .829</td> <td>(4.95) .195</td> <td>(3.96) .156</td> <td>(13.82) .544</td> <td>—</td> <td>—</td> </tr> <tr> <td>-05</td> <td>(4.57) .180</td> <td>(3.81) .150</td> <td>—</td> <td>—</td> <td>—</td> <td>—</td> <td>—</td> </tr> </tbody> </table>		LEAD STYLE	A	B	C	D	E	F	G	-01	(4.57) .180	(11.94) .470	—	—	—	(10.72) .422	(8.64) .340	-02	(4.57) .180	(13.21) .520	(2.54) .100	(4.57) .180	(8.08) .318	(12.24) .482	(8.38) .330	-04	(4.09) .161	(21.06) .829	(4.95) .195	(3.96) .156	(13.82) .544	—	—	-05	(4.57) .180	(3.81) .150	—	—	—	—	—	-RA = Right-angle	
LEAD STYLE	A	B	C	D	E	F	G																																							
-01	(4.57) .180	(11.94) .470	—	—	—	(10.72) .422	(8.64) .340																																							
-02	(4.57) .180	(13.21) .520	(2.54) .100	(4.57) .180	(8.08) .318	(12.24) .482	(8.38) .330																																							
-04	(4.09) .161	(21.06) .829	(4.95) .195	(3.96) .156	(13.82) .544	—	—																																							
-05	(4.57) .180	(3.81) .150	—	—	—	—	—																																							
					-VS = Surface Mount (2 pins/row minimum) Requires HFWS																																									

TYPE STRIP	NO. PINS	04	PLATING OPTION	S	STACK HEIGHT	POST HEIGHT	TAIL OPTION	
SW = Standard Stacker								
02 thru 20			-T = Matte Tin		-“XXX” = Stacker Height (in inches) (0.13 mm) .005" increments Example: -250 = (6.35 mm) .250"		Leave blank for Through-hole	
					-“XXX” = Post Height (in inches)		-VS = Surface Mount (2 pins/row minimum)	
							-VS-P = Surface Mount with Pick & Place Pad (3 Pos. min.) (6.98 mm) .275" max. post height	

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power to the Board](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[10131318-08512GRLF](#) [6450171-4](#) [6450552-7](#) [6600323-8](#) [6643429-1](#) [6646040-2](#) [6651939-1](#) [6766604-1](#) [120959-1](#) [1393557-2](#) [1393532-2](#)
[1393532-3](#) [1393532-4](#) [1393557-1](#) [1600812-5](#) [1-6450861-2](#) [1645595-1](#) [1743490-1](#) [1744132-7](#) [1761122-1](#) [1766169-1](#) [1766250-1](#) [18362](#)
[1892109-1](#) [1-967627-6](#) [2226808-1](#) [2-6450860-5](#) [2-6450860-6](#) [2-6450870-0](#) [93003-0502](#) [953552-1](#) [1-6450161-4](#) [1-6450850-6](#) [1645526-2](#) [1-](#)
[6600130-0](#) [1743419-1](#) [1766150-1](#) [2005243-2](#) [211110-1](#) [2-6600130-2](#) [TE34-12-16P-F0](#) [51700-10201602AALF](#) [5-6450830-6](#) [5646956-4](#)
[36662-0005](#) [40585-3000](#) [4-6450830-9](#) [4-6600333-3](#) [51142-0214](#) [10125416-4050LF](#)