

HIGH-SPEED HERMAPHRODITIC CABLE

(0.50 mm) .0197" PITCH • HLCD SERIES





HLCD
Mates:
 LSHM

SPECIFICATIONS

Cable:
 38 AWG 50 Ω coax cable
Signal Routing:
 50 Ω Single-Ended
Plating:
 Au over 50 μ" (1.27 μm) Ni
Operating Temp Range:
 -25 °C to +105 °C
Current Rating:
 0.9 A per pin
 (2 pins powered)

HLCD	POSITIONS PER ROW	WIRE LENGTH	END NO. 1	END 1 OPTION	END NO. 2	END 2 OPTION	WIRING OPTION
	-20, -30, -40, -50 (Standard sizes)	-"XX.XX" = Wire Length in Inches (43.7 mm) 01.72" minimum	-TR = Vertical, Top Right	Leave blank for no screw down. Screw down not available for -TD, -TH, -BD & -BH options.	-TR = Vertical, Top Right	Leave blank for no screw down. Screw down not available for -TD -TH, -BD & -BH options.	-1 = Pin 1 to Pin 1
			-TL = Vertical, Top Left		-TL = Vertical, Top Left		-2 = Pin 1 to Pin 2
			-BR = Vertical, Bottom Right	S = Screw down in PCB	-BR = Vertical, Bottom Right	S = Screw down in PCB	-3 = Pin 1 to Pin N-1
			-BL = Vertical, Bottom Left		-BL = Vertical, Bottom Left		-4 = Pin 1 to Pin N
			-TD = Right- angle, Top		-TD = Right- angle, Top		
			-TH = Reversed Right- angle, Top		-TH = Reversed Right- angle, Top		
			-BD = Right- angle, Bottom		-BD = Right- angle, Bottom		
			-BH = Reversed Right- angle, Bottom		-BH = Reversed Right- angle, Bottom		

END TO END	A
Vertical to Vertical	(21.84) .860
Vertical to Right-angle	(25.35) .998
Vertical to Reversed Right-angle	
Right-angle to Right-angle	
Right-angle to Reversed Right-angle	(28.85) 1.136
Reversed Right-angle to Reversed Right-angle	

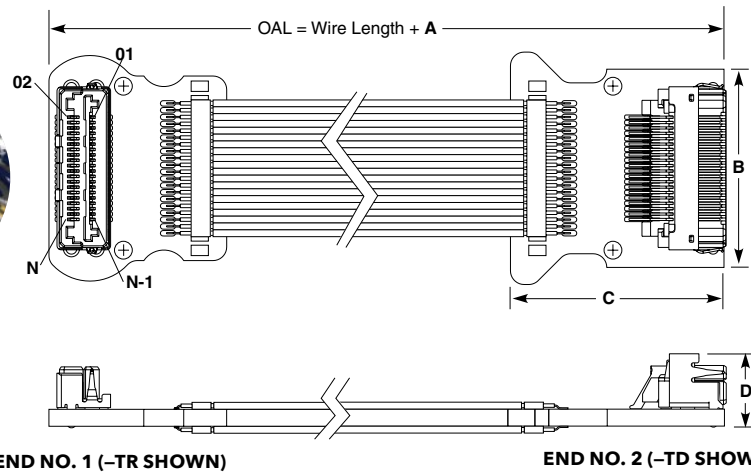

POSITIONS PER ROW	B	
	XR, XL	XH, XD
-20	(22.23) .875	(18.42) .725
-30	(24.77) .975	(26.04) 1.025
-40	(32.39) 1.275	(33.66) 1.325
-50	(40.01) 1.575	(41.28) 1.625

END OPTION	C	D
XL, XR	(16.51) .650	(6.02) .237
XD	(20.02) .788	(6.71) .264
XH		

Notes:
 Cable lengths longer than 40.00" (1 meter) are not supported with S.I. test data.
 Design your full cable assembly with Samtec's High-Speed Cable Builder at www.samtec.com/cablebuilder
 Some lengths, styles and options are non-standard, non-returnable.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectangular Cable Assemblies](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[MC320E-N-23](#) [A08KR08KR26E203B](#) [G125FC10668L0-0300L](#) [G125FC10668L0-0150L](#) [G125-FC11068L0-0150L](#) [G125-FC11068L0-0300L](#)
[A06XAF06XAF22K254B](#) [A10XAF10XAF22K152B](#) [A13KR13KR26E254B](#) [A12SUR12SUR32W203A](#) [A16KR16KR26E203B](#)
[A12KR12KR26E305A](#) [A12KR12KR26E305B](#) [A12ZR12ZR28H203B](#) [A12ZR12ZR28H203A](#) [A10SR10SR30K254A](#) [A09SR09SR30K305A](#)
[A14KR14KR26E254A](#) [A14KR14KR26E254B](#) [A10ZR10ZR28H254A](#) [A09ZR09ZR28H305A](#) [A09ZR09ZR28H305B](#) [A13ZR13ZR28H203A](#)
[A15KR15KR26E254A](#) [A13KR13KR26E305B](#) [A11ZR11ZR28H254A](#) [A11ZR11ZR28H254B](#) [A11SR11SR30K254A](#)
[A12SUR12SUR32W254A](#) [A10ZR10ZR28H305A](#) [A14KR14KR26E305B](#) [A10ZR10ZR28H305B](#) [A12ZR12ZR28H254A](#)
[A15KR15KR26E305A](#) [A15KR15KR26E305B](#) [A11SR11SR30K305A](#) [A11ZR11ZR28H305A](#) [A11ZR11ZR28H305B](#) [A13ZR13ZR28H254A](#)
[A12SUR12SUR32W305A](#) [A12ZR12ZR28H305A](#) [A12ZR12ZR28H305B](#) [A20XAF20XAF22K51B](#) [A13ZR13ZR28H305A](#)
[A20XAF20XAF22K102B](#) [A20XAF20XAF22K152B](#) [A20XAF20XAF22K203B](#) [A20XAF20XAF22K254B](#) [A20XAF20XAF22K305B](#)
[A16XSR16XSR36R254B](#)