



ICA-320-SGT



ICA-624-ZEGG

(2,54mm) .100"

ICA SERIES

AUTOMATED INSERTION DIP SOCKETS

Mates with:
APA

ICA

ROW SPACING &
NO. OF CONTACTS


STYLE
OPTION

PLATING
OPTION

OPTION
(Leave Blank for
Standard Version)

Specify from chart below

- Side & end stackable
- Great for auto insertion
- Open body design

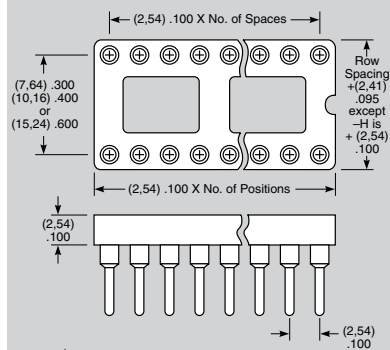

	Row Space	No. of Contacts
-308	.300 (7,62)	08
-314		14
-316		16
-318		18
-320		20
-322*		22
-324	.400 (10,16)	24
-328		28
-422	.600 (15,24)	22
-624		24
-628		28
-632		32
-640		40
-648		48

GG
= 30μ" (0,76μm)
Gold contact,
10μ" (0,25μm)
Gold Shell

GT
= 30μ" (0,76μm)
Gold contact,
Tin Shell

ST
= 10μ" (0,25μm)
Gold contact,
Tin shell (Styles -S
& -ZS only)

-2
= .360 (9,14)
Tail
**Wire-Wrap
Option**
Requires Style
-W or -ZW
Specify desired
suffix for shorter
Wire-Wrap tail.

-3
= .260 (6,60)
Tail
-L
= Locking
Socket
Requires Style
-S or -ZS
Requires GT
Plating Option

SPECIFICATIONS

For complete specifications
see www.samtec.com?ICA

Insulator Material:
Black Glass Filled
Polyester
except -328 is LCP
Contact: BeCu
Shell: Brass

Plating:

Au or Sn over 50μ" Ni
Flammability Rating:
UL 94V-O

Insulation Resistance:
5000 MΩ min

Temperature Range:
-55°C to +105°C with Tin
-55°C to +125°C with Gold.

Withstanding Voltage:
1000 VRMS

Current Rating: 1A
Contact Resistance:
10mΩ max

Lead Size Range:
.015" (0,38mm) to .022"
(0,56mm) DIA and most IC leads

Insertion Force:
(Single contact only)
Standard = 9 oz avg, 16 oz max;
Low Insertion Force =
2.5 oz avg, 5.5 oz max

Withdrawal Force:
(Single contact only)
Standard = 2.5 oz avg, 1.5 oz
min; Low Insertion Force =
2.0 oz avg, 0.35 oz min


Lead-Free Solderable:
Wave only
RoHS Compliant: Yes



Note: Some sizes, styles and
options are non-standard,
non-returnable.


-S, -ZS, -ZA

= Printed Circuit
-ZS & -ZA = Low Insertion Force



LEAD STYLE	X DIA	Y TAIL	Z
-S or -ZS	(0,51) .020	(3,18) .125	(7,62) .300
-ZA	(0,51) .020	(4,57) .180	(8,89) .350


Locking lead
available with -S
and -ZS.
See OPTION.



Insertion Depth = .095" (2,41) to .145" (3,68):
Style S Component Part No. = SC-1P1
Style ZS Component Part No. = EZ-1P1
Style ZA Component Part No. = EZ-6P1
Option L Component Part No. = SC-1L1 or EZ-1L1

-W, -ZW

= Wire-Wrap
ZW = Low Insertion Force




Shorter wire-wrap tail
lengths available.
See OPTION.

Insertion Depth = .125" (3,18) to .157" (3,99)
Style W Component Part No. = SC-1W1(1)
Style ZW Component Part No. = EZ-1W1(1)
Style W-2 Component Part No. = SC-1W1(2)
Style ZW-2 Component Part No. = EZ-1W1(2)
Style W-3 Component Part No. = SC-1W1(3)
Style ZW-3 Component Part No. = EZ-1W1(3)

-ZE

= Elevated
Low Insertion Force



Insertion Depth = .125" (3,18) to .170" (4,32)
Style ZE Component Part No. = EZ-2P3

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[10135583-642402LF](#) [89885-310LF](#) [589158040000018](#) [6-1393048-0](#) [68683-613](#) [MDF7-12DP-2.54DSA](#) [MDF7-18P-2.54DSA\(01\)](#) [MDF7-20DP-2.54DSA](#) [MDF7-26D-2.54DSA\(55\)](#) [MDF7-3P-2.54DSA\(01\)](#) [MDF7B-3P-2.54DSA\(55\)](#) [MDF7C-11P-2.54DSA\(55\)](#) [MDF7C-18P-2.54DSA\(55\)](#) [MDF7C-5P-2.54DSA\(01\)](#) [MDF7P-5P-2.54DSA\(55\)](#) [75234-0516](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-360C008-C](#) [FCN-360C040-C](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [93696-325LF](#) [11828-1FA](#) [AXK630345P](#) [18097-0013](#) [ICA-328STT](#) [2007042-2](#) [304400-2](#) [FCN-214Q030-G/0](#) [FCN-215Q040-G/0](#) [FCN-230C068-ESA](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [FCN-360A3](#) [FCN-360C040-B](#) [210-93-314-41-105000](#) [2-22603-0](#) [379-064-521-202](#) [MDF7-12P-2.54DSA\(01\)](#) [MDF7-16P-2.54DS\(56\)](#) [MDF7-40DP-2.54DSA\(55\)](#) [MDF7-8P-2.54DSA\(55\)](#) [MDF7B-16P-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#)