


SERIES	PINS PER ROW	WIRE GAUGE	K	ASSEMBLED LENGTH	END OPTION	LATCH OPTION
<b>PMSSD</b> = Double Row PVC Cable	<b>-02, -03</b>	<b>-16</b>	<b>-K</b> = Keyed Polarization	<b>-"XX.XX"</b> = Wire length in inches (88.90 mm) 03.50" min.	<b>-S</b> = Single End	<b>-LUS</b> = Plastic Latch up, straight
<b>PMSSDT</b> = Double Row Blue *Teflon® Cable (24 AWG only)	<b>-04, -05</b>	<b>-18</b>			<b>-D</b> = Double End (Latch Required)	<b>-LDS</b> = Plastic Latch down, straight
<b>PMSSS</b> = Single Row PVC Cable	<b>-08, -10</b>	<b>-206</b> (20 AWG/600 volts)				<b>-LUX*</b> = Plastic Latch up, crossed
<b>PMSSST</b> = Single Row Blue *Teflon® Cable (24 AWG only)	<b>-15*</b> (Standard sizes) *Only available for double row	<b>-22</b>				<b>-LDX*</b> = Plastic Latch down, crossed
		<b>-24</b>				*(PMSSD/PMSSDT only)

**PMSSD, PMSSDT, PMSSS, PMSSST**  
Board Mates:  
IPBT


\*DuPont™ Teflon® is a registered trademark of the E.I. du Pont de Nemours and Company or its affiliates.

**Notes:**  
Teflon® cable is intended for crimp only. Contact Samtec for solderable cable applications.


For wiring option information refer to drawing on web.



PMSS/PMSSST



PMSSD/PMSSDT

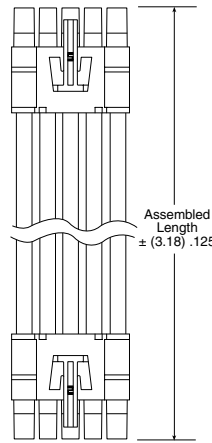



PMSSD/IPBT	
WIRE GAUGE	CURRENT RATING (PER PIN)
16 AWG	10.3 A
18 AWG	8.8 A
22 AWG	5.7 A
24 AWG	5.2 A

2 PIN POWERED


View complete specifications at: [samtec.com?PMSSD](http://samtec.com?PMSSD), [samtec.com?PMSSDT](http://samtec.com?PMSSDT), [samtec.com?PMSSS](http://samtec.com?PMSSS) & [samtec.com?PMSSST](http://samtec.com?PMSSST)

IPBD	POSITIONS PER ROW	ROW OPTION	K	SERIES	WIRE GAUGE	01	T	SP
	<b>-02, -03, -04, -05, -08, -10, -15</b> (Standard sizes)	<b>-S</b> = Single Row <b>-D</b> = Double Row	<b>-K</b> = Keyed Polarization	<b>CC69L</b> = Contact, Loose <b>CC69R</b> = Contact, Full Reel (4,000 Parts per Reel)	<b>-2024</b> = 20 to 24 AWG <b>-1620</b> = 16 to 20 AWG		<b>-T</b> = Tin	







**-D**



**-S**





## TOOLING

Hand Tool: CAT-HT-169-1620-13 (16-20 AWG)  
Hand Tool: CAT-HT-169-2024-13 (20-24 AWG)

Mini Applicator: CAT-MC-169-1620-XX-02 (16-20 AWG)  
Mini Applicator: CAT-MC-169-2024-XX-01 (20-24 AWG)  
Extraction Tool: CAT-EX-169-01

**Note:**  
Some lengths, styles and options are non-standard, non-returnable.

View complete specifications at: [samtec.com?IPBD](http://samtec.com?IPBD), [samtec.com?CC69L](http://samtec.com?CC69L) & [samtec.com?CC69R](http://samtec.com?CC69R)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Heavy Duty Power Connectors](#) category:*

*Click to view products by [Samtec](#) manufacturer:*

Other Similar products are found below :

[647757-1](#) [6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)  
[6651788-1](#) [696475-1](#) [702-32-01109](#) [703-25-02205](#) [73000005059](#) [73000005642](#) [73080255059](#) [73080965046](#) [765-15-0080A](#) [765-16-0080B](#)  
[765-18-0080D](#) [829992-1](#) [902-77-02113](#) [PS00/A0620/6300](#) [PS25/A0420/63](#) [129-1J](#) [1409400](#) [AN0024023](#) [E6374G1](#) [e6389g2](#) [157-43GW8](#)  
[MS3117-14AC](#) [1643543-1](#) [1650540-1](#) [1651811-2](#) [1766260-1](#) [1766282-1](#) [1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-S120-M40A](#) [NLDFT-N-](#)  
[W-L-C240-M40B](#) [NLS-2-R-C240-M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [1986615-1](#) [2-1589900-8](#) [2199314-1](#) [KA8102](#)