



MEC1-120-02-F-D-A



MEC1-130-02-F-D-A



MEC1-140-02-L-D

MEC1 SERIES

(1.00 mm) .0394"

MINI EDGE CARD SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?MEC1

Insulator Material:

Black LCP

Contact Material:

BeCu

Plating:

Sn or Au over 50 μm

(1.27 μm) Ni

Operating Temp Range:

-55 °C to +125 °C

Current Rating:

2.2 A per pin
(2 adjacent pins powered)

Voltage Rating:

300 VAC

Insertion Depth:


(5.84 mm) .230" to

(8.13 mm) .320"


RoHS Compliant:

Yes

Mates with:
(1.60 mm) .062" card

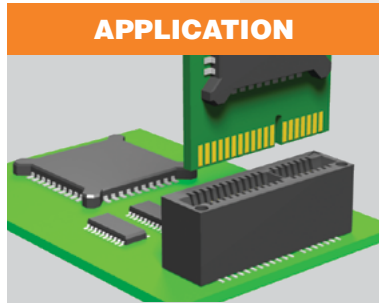

APPLICATION

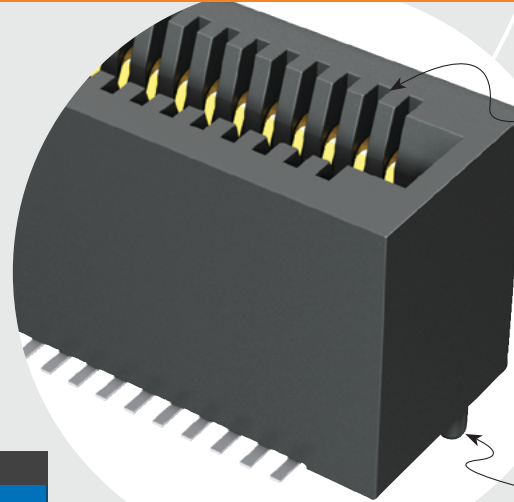

Mates with
(1.60 mm)
.062" card

Optional
Alignment pin

HIGH-SPEED CHANNEL PERFORMANCE

MEC1

Rating based on Samtec reference channel.
For full SI performance data visit Samtec.com
or contact SIG@samtec.com

14
Gbps

PROCESSING

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0.10 mm) .004" max (05-20)

(0.15 mm) .006" max (30-70)*

*(.004" stencil solution

may be available; contact

IPG@samtec.com)

RECOGNITIONS

For complete scope of

recognitions see

www.samtec.com/quality



FILE NO. E111594

ALSO AVAILABLE

(MOQ Required)

- Locking Clip
(Manual placement required)
- Other platings

Important Note:

Samtec recommends that pads on the mating board be Gold plated.

Notes:

While optimized for 50 Ω applications, this connector with alternative signal/ground patterns may also perform well in certain 75 Ω applications.

Some sizes, styles and options are non-standard, non-returnable.

MEC1 — **1** POSITIONS PER ROW — **02** — **PLATING OPTION** — **D** — **NP** — **OTHER OPTION**

05, 08, 20, 30, 40, 50, 60, 70

-F
= Gold flash on contact, Matte tin on tail


-L
= 10 μm (0.25 μm) Gold on contact, Matte Tin on tail

-NP
= No Polarization (05, 08, 20 & 30 positions only)
Leave Blank for polarization


-A
= Alignment Pin metal or plastic at Samtec discretion.

-K
= (7.87 mm) .310" DIA Polyimide film Pick & Place Pad

-TR
= Tape & Reel (05-60 only)



POSITIONS PER ROW	POLARIZED POSITIONS (No Contact)
05	3, 4
08	5, 6
20	15, 16
30	21, 22
40	31, 32
50	41, 42
60	31, 32, 63 & 64
70	53, 54, 115 & 116

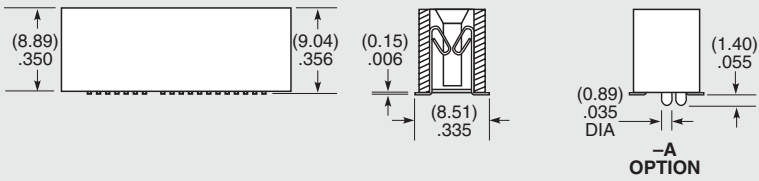

Due to technical progress, all designs, specifications and components are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [PCI Express/PCI Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[UEX220-6U](#) [0877159203](#) [10039755-10110TLF](#) [10039755-10211TLF](#) [10025026-10003PLF](#) [10125756-A41010LF](#) [10125756-980000LF](#) [1-1871239-2](#) [2170560-2](#) [10082378-11003TLF](#) [10125756-980000LF](#) [1775861-2](#) [10039755-10111TLF](#) [EB220-3U](#) [WD2M144WB2R300](#)
[10061913-120PLF](#) [10108777-10002WLF](#) [GPCP146400111HR](#) [10144667-112Y0LF](#) [10144667-113Y0LF](#) [205058-1001](#) [GPCP446200120HR](#)
[GPCP245400111HR](#) [10082378-10000TLF](#) [10082378-10001TLF](#) [87715-9256](#) [MDT580M03001](#) [0877159107](#) [205058-1003](#) [MDT580M01001](#)
[10018783-11000MLF](#) [10061913-103BLF](#) [10145445-10003MLF](#) [PSASF2130311TR](#) [10147430-113T0LF](#) [10146070-113Y0LF](#)
[MDT670M01005](#) [10108777-10200MLF](#) [MDT420M01002](#) [PSASF3130211TR](#) [PSASF4130051TR](#) [PSASM2130412TR](#) [PSASM2130391TR](#)
[10139595-111T0LF](#) [10139595-110T0LF](#) [PSASF3130131TR](#) [0745400501](#) [7-1734774-7](#) [10150900-052R2LF](#) [3-1761465-1](#)