


QUAD ROW TERMINAL/SOCKET

(1.27 mm) .050" PITCH • FOLC/MOLC SERIES

MAX
2.6
A m p s

8
G b p s

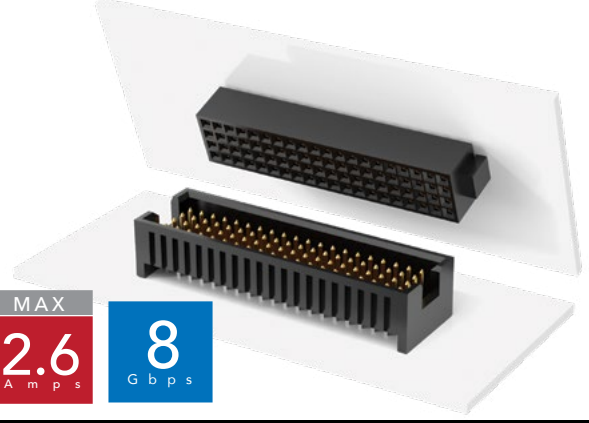


FOLC
Board Mates:
MOLC

MOLC
Board Mates:
FOLC


FOLC	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	Q	OPTION
		20, 25, 30, 35, 40, 45, 50 (Standard sizes)	-01 & -04 = Through-hole -M1 & -M2 = Mixed Technology -L1 & -L4 = Low Insertion Force Through-hole	-L = 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail		-LC = Locking Clip (Manual placement required)

SPECIFICATIONS

Insulator Material:
Black Liquid Crystal Polymer
Contact Material (FOLC):
BeCu
Terminal Material (MOLC):
Phosphor Bronze
Plating:
Au or Sn over
50 μ" (1.27 μm) Ni
Current Rating:
2.6 A per pin
(4 pins powered)
Operating Temp Range:
-55 °C to +125 °C
Voltage Rating:
165 VAC/230 VDC
Insertion Depth (FOLC):
(3.30 mm) .130" to
(4.06 mm) .160"
Normal Force (FOLC):
Standard = 70 grams
(0.69 N) avg.
LIF = 40 grams
(0.39 N) avg.
Max Cycles (FOLC):
100



LEAD STYLE	C
-01, -M1	(1.91) .075
-04, -M2	(3.04) .120

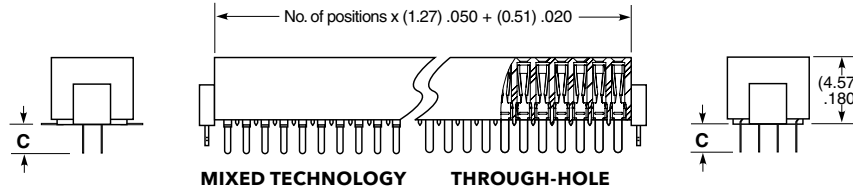





View complete specifications at: samtec.com?FOLC

PROCESSING

Lead-Free Solderable:
Yes
SMT Lead Coplanarity (MOLC):
(0.10 mm) .004" max (20-25)
(0.15 mm) .006" max (30-50)*
*(.004" stencil solution
may be available; contact
IPG@samtec.com)




MOLC	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	Q	OPTION
		20, 25, 30, 35, 40, 45, 50 (Standard sizes)	-'X'1 = Through-hole (Specify from chart) -02 = Surface Mount -M1 = Mixed Technology	-L = 10 μ" (0.25 μm) Gold on post, Matte Tin on tail		-LC = Locking Clip (Manual placement required) -P = Pick & Place Pad (-02 only) -TR = Tape & Reel (-02 only) -FR = Full Reel Tape & Reel (must order max. quantity per reel; contact Samtec for quantity breaks) (-02 only)

APPLICATIONS

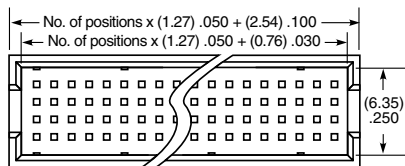

LEAD STYLE		MATED HEIGHT*
MOLC	FOLC	
-01		(5.97) .235
-11	-01	(7.75) .305
-31		(11.43) .450

*Processing conditions will affect mated height.



LEAD STYLE	A	B
-01	(5.59) .220	(3.38) .133
-11	(7.34) .289	(3.66) .144
-31	(11.05) .435	

Note:
Some lengths, styles and options are non-standard, non-returnable.

View complete specifications at: samtec.com?MOLC

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68684-306](#) [75140-7012](#) [589159005003045](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [589159005002045](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#)