


HORIZONTAL & MODIFIED HEADERS

(2.00 mm) .0787" PITCH • MMT/MTMM SERIES

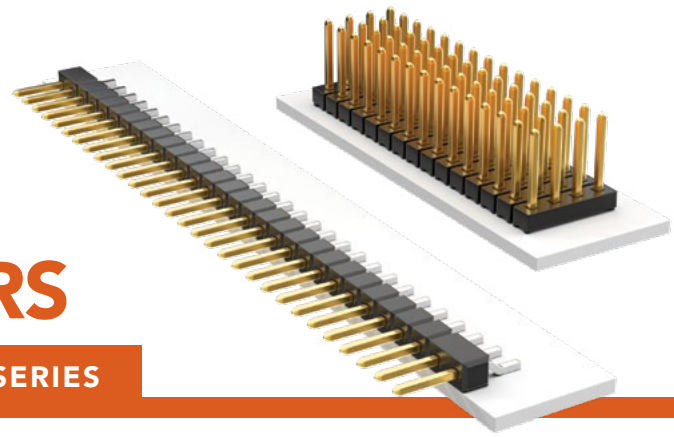

MMT/MTMM

Board Mates:

CLT, SQT*, SQW, ESQT, TLE, SMM, MMS

Cable Mates:

TCSD

*Important Note:

SQT will not mate to the MMT -02 lead style.

SPECIFICATIONS

Insulator Material:

Black Liquid Crystal Polymer

Terminal Material:

Phosphor Bronze

Plating:

Au or Sn over 50 μ" (1.27 μm) Ni

Operating Temp Range:

-55 °C to +105 °C with Tin;
-55 °C to +125 °C with Gold

PROCESSING

Lead-Free Solderable:

Yes

SMT Lead Coplanarity (MMT):

(0.10 mm) .004" max (02-25)
(0.15 mm) .006" max (26-36)*
*(.004" stencil solution may be available; contact ipg@samtec.com)

MMT	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	OPTION
		02 thru 36	-01 = (3.20 mm) .126" post -02 = (4.45 mm) .175" post	-F = Gold flash on post, Matte Tin on tail -L = 10 μ" (0.25 μm) Gold post, Matte Tin on tail -T = Matte Tin	-SH = Single Row -DH = Double Row -MT = Double Row Mixed Technology	-K = (4.00 mm) .157" DIA Polyimide Film Pick & Place Pad (3 positions min.) -P = Pick & Place Pad (2 positions min.) -"XXX" = Polarized Position Specify position of omitted pin -TR = Tape & Reel -FR = Full Reel Tape & Reel (must order max. quantity per reel; contact Samtec for quantity breaks)

ALSO AVAILABLE
 MOQ Required
 Alignment pins
 Locking clips
 Molded pick & place pads
 Other platings

MTMM	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	POST HEIGHT	OPTION
		01 thru 50	Specify LEAD STYLE from chart	-F = Gold flash on post, Matte Tin on tail -L = 10 μ" (0.25 μm) Gold post, Matte Tin on tail -T = Matte Tin	-S = Single Row -D = Double Row -Q = Quad Row	-"XXX" = Post Height in inches (0.13 mm) .005" increments Example: = -070 (1.78 mm) .070"	-"XXX" = Polarized Position Specify position of omitted pin

LEAD STYLE	OAL
-02	(6.48) .255
-03	(7.67) .302
-04	(8.20) .323
-05	(9.58) .377
-06	(10.08) .397
-07	(11.58) .456
-08	(12.09) .476
-09	(13.59) .535
-10	(14.10) .555
-11	(15.09) .594
-12	(15.60) .614
-13	(17.09) .673
-14	(19.08) .751
-15	(21.08) .830

ALSO AVAILABLE
 Other Platings (MOQ Required)

Note:
Some lengths, styles and options are non-standard, non-returnable.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [79531-3000](#) [FCN-](#)
[360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#)