



# FLEX STACK

(1.27 mm) .050"

MTMS-130-02-G-D-100



MTMS-110-02-G-D-100

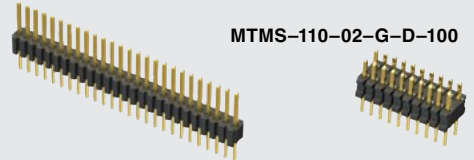

MTMS-125-51-G-S-200

## MTMS, HMTMS SERIES

# MODIFIED MICRO TERMINAL

### SPECIFICATIONS

For complete specifications see [www.samtec.com?MTMS](http://www.samtec.com?MTMS) or [www.samtec.com?HMTMS](http://www.samtec.com?HMTMS)

**Insulator Material:**  
Black Liquid Crystal Polymer

**Terminal Material:**  
Phosphor Bronze

**Plating:**

Au or Sn over  
50 μm (1.27 μm) Ni

**Operating Temp Range:**  
-55 °C to +105 °C with Tin  
-55 °C to +125 °C with Gold

**RoHS Compliant:**  
Yes

Mates with:  
SMS, SLM, RSM

### PROCESSING

**Lead-Free Solderable:**  
Yes







### RECOGNITIONS

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)



### ALSO AVAILABLE (MOQ Required)

- Other platings

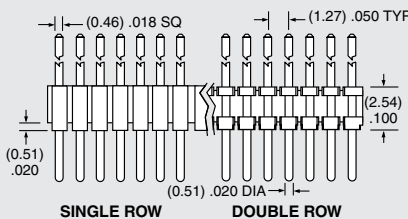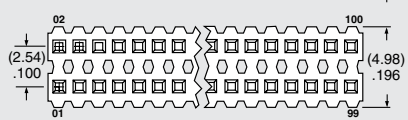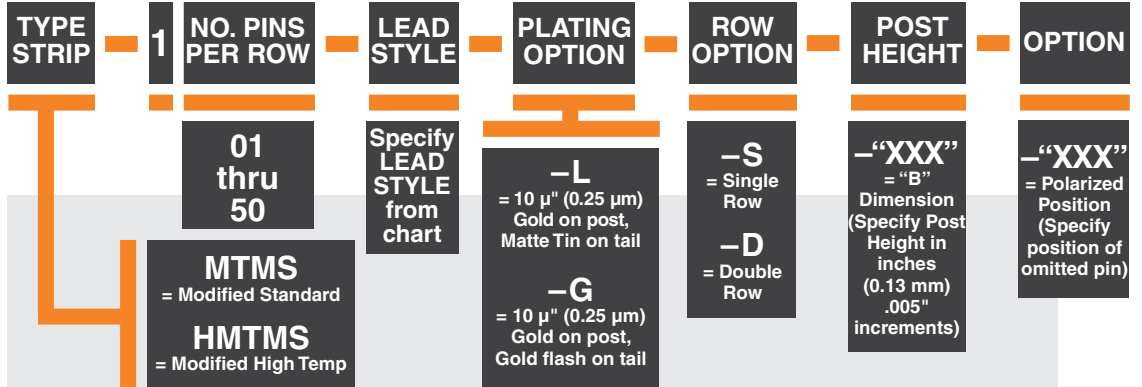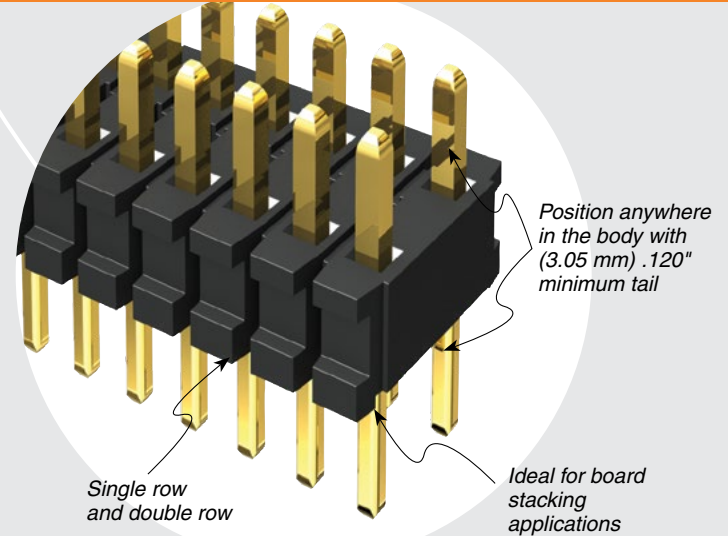

LEAD STYLE	OAL	B (Maximum when C = (3.05 mm) .120")
-01	(11.43) .450	(5.84) .230
-02	(8.13) .320	(2.54) .100
-25*	(8.38) .330	(3.18) .125
-51	(10.41) .410	(4.83) .190
-52	(10.80) .425	(5.21) .205
-53	(12.83) .505	(7.24) .285
-54	(14.10) .555	(8.51) .335
-55	(15.49) .610	(9.91) .390
-56	(15.88) .625	(10.29) .405
-57	(16.51) .650	(10.92) .430
-58	(17.91) .705	(12.32) .485
-59	(19.18) .755	(13.59) .535
-60	(20.96) .825	(15.37) .605

\*Style -25 tail C = (1.02 mm) .040" min is available.

**Note:**  
This Series is non-standard, non-returnable.

Tail DIA is .020" (0.51 mm) for min .120" (3.05 mm).  
Balance of tail is .018" (0.46 mm) SQ.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:*

*Click to view products by [Samtec](#) manufacturer:*

Other Similar products are found below :

[589158040000018](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68684-306](#) [75140-7012](#) [589159005003045](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [589159005002045](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#)