





**MUSB SERIES** 

## **MINI USB 2.0 INTERFACES**

## **SPECIFICATIONS**

For complete specifications and recommended PCB layouts see www.samtec.com?MUSB,

## Insulator Material: High Temperature

Thermoplastic
Contact Material:
Phosphor Bronze

Shell Material:

Plating:

Gold on Mating Area, Nickel on Shell, Tin on Tails Operating Temp Range: -50 °C to +85 °C Voltage Rating: 30 VRMS

**Minimum Cycles:** 


1500


Packaging:

Packaged and shipped in Bulk Packaging Trays; Trays suitable for automation are

available upon request. RoHS Compliant:

Lead-Free Solderable:



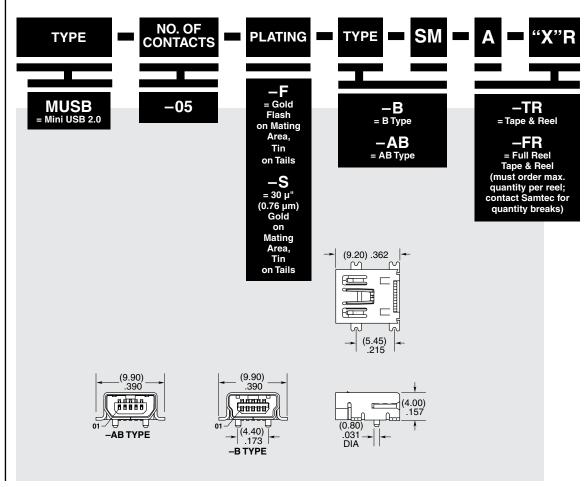

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for USB Connectors category:

Click to view products by Samtec manufacturer:

Other Similar products are found below:

65-647-8-BK-BU 950 952 E8144-B01021-L A-USB B-TOP-C MUSBA511N5 MUSBD11135 217450-1 KMBVX-TH-5S-B30 896-30-004-00-000000 KUSBVX-BS1N-W30 KUSBX-AP-KIT-SCBLK KUSBX-AS2N-W KUSBX-SMT2AP1S-W KUSBX-SMT2AP1S-W30 935 957 30-498-6 SK-60A-2 17-210051 1734082-1 30-1574 30-470 30-489 30-541 30-572-3 A-USB A-2P-C MIKROE-1451 USBFTV2PEM2G USBFTVC6ZN KUSBX-AS2N-W30 KUSBX-SLAS1N-W KUSBX-SMT-AS1N-W30 4689-1 1-1734084-2 E8110-001-01 33UBARS1-04SW11 33UBAR-04SW11 USBF21ZNSCC USBBFTV6ZC 10135326-001LF M9177/3-1 USB-A-S-F-B-VT 925 4198 690-024-633-031 KUSBEX-BSFS1N-W USBFTVC6MRG UA-20BMFA-SL8001 17-250101