


ICF-624-S-O

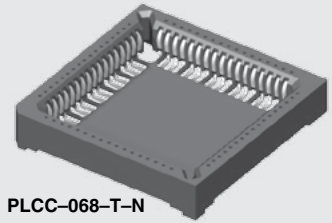

PLCC-068-T-N

(2.54 mm) .100" (ICF) (1.27 mm) .050" (PLCC)

ICF, PLCC SERIES

# SMT DIP & CHIP CARRIER SOCKETS

## SPECIFICATIONS

For complete specifications and recommended PCB layouts see [www.samtec.com?ICF](http://www.samtec.com?ICF) or [www.samtec.com?PLCC](http://www.samtec.com?PLCC)

**Insulator Material:**  
Black Liquid Crystal Polymer

**Contact Material:**

BeCu

**Plating:**

Sn or Au over

50 μ" (1.27 μm) Ni

**Operating Temp Range:**

-55 °C to +125 °C

**Insertion Depth (ICF):**

(2.54 mm) .100" to

(3.81 mm) .150"

**Insertion**

**Force/Contact (ICF):**

(1.39 N) 5 oz average

**Withdrawal**

**Force/Contact (ICF):**

(1.11 N) 4 oz average

**RoHS Compliant:**

Yes

## PROCESSING

**Lead-Free Solderable:**

Yes

**SMT Lead Coplanarity (ICF):**

(0.15 mm) .006" max\*

\*(.004" stencil solution

may be available; contact

IPG@samtec.com)

**SMT Lead Coplanarity (PLCC):**

(0.15 mm) .006" max\*

(Less than 52 leads)

(0.20 mm) .008" max\*

(52 leads and more)

\*(.004" stencil solution

may be available; contact

IPG@samtec.com)

## RECOGNITIONS

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)




FILE NO. E111594

## ICF

## ROW SPACING & NO. OF CONTACTS

Specify from chart below

"-XXX"	Row Space	No. of Contacts
-308	(7.62) .300	08
-314		14
-316		16
-318		18
-320	(15.24) .600	20
-328		28
-624		24
-628		28
-632	(15.24) .600	32
-640		40

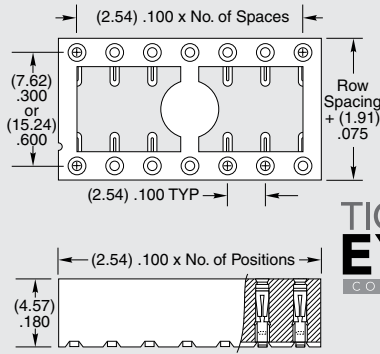

## PLATING OPTION

**-S**  
=30 μ"  
(0.76 μm)  
Gold on contact,  
Matte Tin on tail


**-T**  
= Matte Tin

## TAIL OPTION

**-I**  
=Tails In



**-O**  
=Tails Out



## OTHER OPTION

**-TR**  
=Tape & Reel Packaging

## PLCC

## NO. OF CONTACTS

-020, -032, -044, -068

## PLATING OPTION


**-T**  
Matte Tin

## ALIGNMENT PIN OPTION

**-N**  
=No Alignment Pins



## PACKAGE OPTION

**-TR**  
=Tape & Reel Packaging

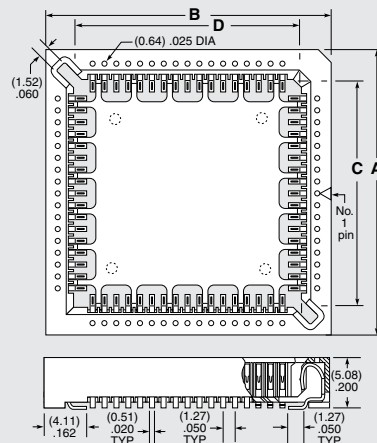

\*32 position has (1.00 mm) .040 DIA x (0.76 mm) .030 high standoffs in corners.

NO. OF CONTACTS	A	B	C	D
-020	(15.24) .600	(15.24) .600	(9.40) .370	(9.40) .370
-032	(17.78) .700	(17.78) .700	(11.94) .470	(11.94) .470
-044	(22.86) .900	(22.86) .900	(17.02) .670	(17.02) .670
-068	(30.48) 1.200	(30.48) 1.200	(24.64) .970	(24.64) .970



Leave package option blank for packaging in a tube.

**Note:**  
Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Samtec manufacturer](#):*

Other Similar products are found below :

[ESQT-135-03-F-D-380](#) [QTE-060-01-L-D-A](#) [MSAS-179-ZUGG-18](#) [MTSW-103-07-F-S-240](#) [BCS-116-L-S-TE](#) [ERF8-020-05.0-S-DV-K-TR](#)  
[ERF8-060-05.0-L-DV-K-TR](#) [IDMD-10-T-12.00-A-G-R](#) [SFML-115-01-S-D](#) [SFML-125-01-S-D](#) [LSHM-120-02.5-L-DV-A-N-K-TR](#) [ESQ-110-14-G-D](#) [ESQT-125-03-F-D-310](#) [SO-0515-01-01-02](#) [FJH-50-D-12.00-4](#) [CES-150-01-T-D](#) [QTE-040-04-L-D-A](#) [QTH-020-04-F-D-DP-A-K-TR](#)  
[QTH-060-01-F-D-A](#) [QTH-090-04-L-D-A](#) [TCSD-10-S-05.00-01-F-N](#) [TCSD-15-D-02.00-01-N](#) [TFM-115-02-L-DH](#) [TFM-120-12-S-D-LC](#)  
[TFML-140-02-S-D](#) [TLW-107-05-G-D](#) [BDL-136-T-E](#) [TSS-132-01-G-S](#) [TST-113-04-S-D-RA](#) [TSW-105-14-F-D](#) [MMS-110-01-H-DH](#) [HPF-03-02-T-S](#) [DW-25-11-L-D-450](#) [ERF8-020-01-L-D-RA-L-TR](#) [ERF8-040-05.0-L-DV-TR](#) [SL-120-T-10](#) [SLM-115-01-S-D](#) [CLP-132-02-G-D](#)  
[TFC-125-02-F-D-A-K](#) [TSW-202-07-T-S](#) [ISDF-25-D-M](#) [IPT1-105-01-S-D-RA](#) [IPL1-125-01-S-D-RA](#) [ICO-422-L-GT](#) [HTSW-116-15-L-S-LL](#)  
[HTSW-103-08-L-S-RA](#) [ESQ-116-33-T-T](#) [ERM8-020-02.0-S-DV-TR](#) [TCSD-10-D-06.00-01-N](#) [TCSD-20-D-12.00-01-N](#)