




NRZ

14  
Gbps

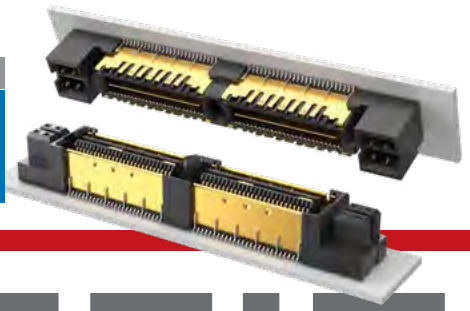

(0.635 mm) .025" PITCH • QMSS/QFSS SERIES

**QMSS**  
Board Mates:  
QFSS

**QFSS**  
Board Mates:  
QMSS


**QMSS/QFSS**  
Standoffs:  
SO

**SPECIFICATIONS**

**Insulator Material:**  
Liquid Crystal Polymer  
**Terminal, Ground Plane & Shield Material:**  
Phosphor Bronze  
**Plating:**  
Au over 50 μ" (1.27 μm) Ni (Tin on Ground Plane Tail)  
**Operating Temp Range:**  
-55 °C to +125 °C  
**Voltage Rating:**  
300 VAC when mated

**PROCESSING**

**Lead-Free Solderable:**  
Yes  
**SMT Lead Coplanarity:**  
(0.10 mm) .004" max (026-078)  
**Board Stacking:**  
For applications requiring more than two connectors contact ipg@samtec.com



QMSS	PINS PER ROW NO. OF PAIRS	06.75	PLATING OPTION	TYPE	A	OTHER OPTION
------	---------------------------	-------	----------------	------	---	--------------





**-026, -052, -078**  
(52 total pins per bank / 40 signals + 12 grounds to shield = -D)  
**-016, -032, -048**  
(16 pairs per bank = -D-DP)

**-L**  
= 10 μ" (0.25 μm) gold on contact, Matte Tin on tail

**-D**  
= Single-Ended  
**-D-DP**  
= Differential Pair

**-K**  
= (5.50 mm) .217" DIA Polyimide film Pick & Place Pad (N/A with -PC4)

**-PC4**  
= 4 Power Pins/End (N/A with -A)

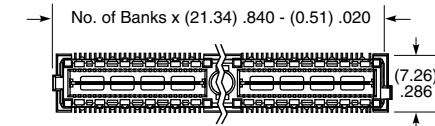

**-PC4 OPTION**

**PACKAGING OPTION**

Tape & Reel Options (-TR & -FR) available. Visit series web page and view engineering prints for complete specifications.

View complete specifications at: [samtec.com?QMSS](http://samtec.com?QMSS)





QFSS	PINS PER ROW NO. OF PAIRS	04.25	PLATING OPTION	TYPE	A	OTHER OPTION
------	---------------------------	-------	----------------	------	---	--------------

**-026, -052, -078**  
(52 total pins per bank / 40 signals + 12 grounds to shield = -D)  
**-016, -032, -048**  
(16 pairs per bank = -D-DP)

**-L**  
= 10 μ" (0.25 μm) gold on contact, Matte Tin on tail

**-D**  
= Single-Ended  
**-D-DP**  
= Differential Pair

**-PC4**  
= 4 Power Pins/End (N/A with -A)



**-PC4 OPTION**

**PACKAGING OPTION**

Tape & Reel Options (-TR & -FR) available. Visit series web page and view engineering prints for complete specifications.

**Note:**  
Some lengths, styles and options are non-standard, non-returnable.

View complete specifications at: [samtec.com?QFSS](http://samtec.com?QFSS)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:*

*Click to view products by [Samtec](#) manufacturer:*

Other Similar products are found below :

[589158040000018](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68684-306](#) [75140-7012](#) [589159005003045](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [589159005002045](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#)