

ACCLIMATE"



IP68 SEALED ETHERNET PLUG

SPECIFICATIONS


For complete specifications see www.samtec.com?RCE

Insulator Material:

Black Liquid Crystal Polymer Contact:

Phosphor Bronze Operating Temp Range: -40 °C to +75 °C

Latch: Wire: 24 AWG Mates with: RPBE-01, RPCE

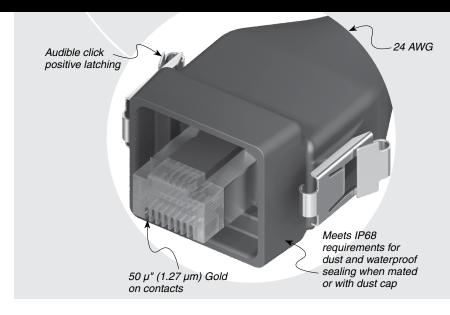

ALSO AVAILABLE (MOQ Required)

· Other wire lengths

RCE -01 = Outdoor UL

PLATING

-G = 50 μ" (1.27 μm) Gold on contact LENGTH

-02.00 = (2 m) 78.74"

-03.00 = (3 m) 118.11"

-05.00= (5 m) 196.85"


Standard lengths

END OPTION

–D = Double End (Both ends sealed)

-BC = Blunt Cut (One end sealed)

APPLICATION






FIELD TERMINATION KIT

- Ethernet Field Termination Kit available for long cable run and small-opening applications so housings can be customer-installed after the runs are complete.
- RCEF-G-01 Series (For cable outside diameter range of 5.00-5.75 mm)
- RCEF-G-02 Series (For cable outside diameter range of 5.75-6.50 mm)

DUST CAPS

STYLE	RCE
-01	DCA-RCE-01-01

Meets IP68 requirements for dust and waterproof sealing when mated or with dust cap.

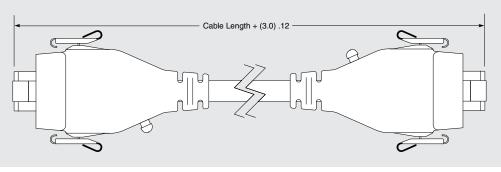

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Modular Connectors / Ethernet Connectors category:

Click to view products by Samtec manufacturer:

Other Similar products are found below:

8949-H88/06BLKA/SN 74441-0010/BKN MP1010RX-1000 MP44RX-1000 PHJ-4P4C-1-V-4 PHP-6P6C-5 GAX-3-66 GAX-8-62 GDCX-PA-66-50 GDCX-PN-64 GDCX-PN-66 GDCX-PN-66-50 GDLX-A-66 GDLX-N-66 GDLX-S-66 GDLX-S-88K GDLX-SMT-S-88 GDTX-S-88-50 GDX-PA-1010 GLX-N-1010M-BLK GLX-S-88M-BLK GMX-N-1010 GMX-S-1010 GMX-S-66 GMX-SMT4-N-88 GPX-2-64 GSGX-N-2-88 GSGX-N-4-88 GSX-NS2-88-3.05 GSX-NS2-88-3.05-50 GSX-NS-88-3.05-50 PT-108A-8C-UL PT-J951-8C PTS-J531-8CS-50UL 1-1775629-2 A-2014-0-4 GWLX-S-88-GR GWLX-S9-88-YG DC-1021-8-WH-6 1300530003 1324640-4 RJ11FTVC2G RJ11FTVC2N RJFTVX2SA1G 132764-001 1413235 MP88X-1000 MPS88RX-5000 E5288-S000K3-L E5908-15A242-L