

IP68 SEALED USB PANEL MOUNT

RPBU, RPCU SERIES



RPBU
Mates with:
RCU (Single Port only)

RPBU	NO. OF PORTS	PLATING	TYPE	LEAD STYLE	OPTION
------	--------------	---------	------	------------	--------

-01
= Single Port

-S
= 30 μ" (0.76 μm) Gold on contact, Matte tin on tail

-A
= USB A Type

-VT
= Vertical Through-hole

-LC
= Locking Clip (-VT only)


-02
= Dual Port (-A only)

-B
= USB B Type


-RA
= Right-angle

SPECIFICATIONS


Insulator Material:
Black Liquid Crystal Polymer
Contact:
Phosphor Bronze
Current Rating:
4.2 A per pin
(1 pin powered)
Operating Temp Range:
-20 °C to +80 °C
Seal: Silicone
Lead-Free Solderable:
Yes




TYPE -B



TYPE -A



-B-VT -B-RA



-A-VT -A-RA

NO. OF PORTS	A	B	C
-01	(48.15) 1.896	(39.10) 1.539	(20.01) .788
-02	(69.80) 2.748	(60.75) 2.392	(42.00) 1.654

DUST CAPS

DCA-RPBU-01-01-A
DCA-RPBU-02-01-A
DCA-RPBU-01-01-B

RPCU
Mates with:
RCU

RPCU	PLATING	CABLE LENGTH	END 1 OPTION	END 2 OPTION
------	---------	--------------	--------------	--------------

-G
= 30 μ" (0.76 μm) Gold on contact, Nickel on shell

-00.25
= (0.25 m) 9.84" Cable

-AMS
= USB A Type, Sealed

AM
= USB A Type, Not Sealed

-00.50
= (0.50 m) 19.68" Cable

-BMS
= USB B Type, Sealed


-BM
= USB B Type, Not Sealed

Standard lengths
(Assembled Length = Cable Length + (42.8 mm) 1.69")

-BC
= Blunt Cut

SPECIFICATIONS

Insulator Material:
Black Liquid Crystal Polymer
Contact Material:
Phosphor Bronze
Operating Temp Range:
-20 °C to +80 °C
Shield Material:
Phosphor Bronze
Wire:
20 AWG (Power)
25 AWG (Signal)
28 AWG (Drain)

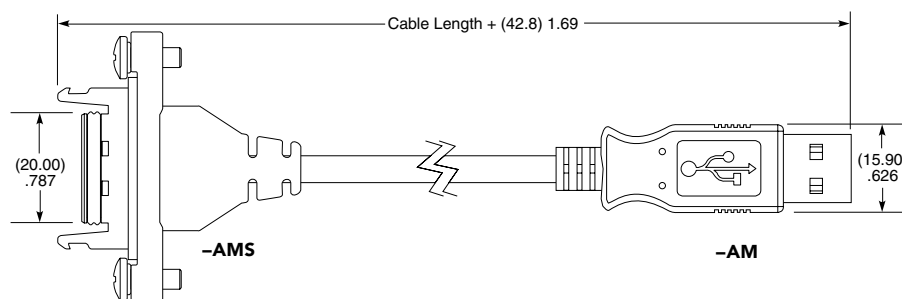

Note:
Some lengths, styles and options are non-standard, non-returnable

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Cables / IEEE 1394 Cables](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[68768-0173](#) [FNY-W6003-01](#) [88764-0800](#) [148700-1](#) [17-200621](#) [17-250051P](#) [954](#) [17-200261](#) [AC102012-1](#) [AC102012-2](#) [FTP-629Y601](#) [45-1345-15](#) [45-1358-15](#) [45-1363-15](#) [IP-USB1\(C10\)S-RW](#) [CABLE/RTP/USB/DT](#) [45-1351-15](#) [45-1357-15](#) [45-1433-1](#) [687680278](#)
[USBFTVX2SA2N03A](#) [USBFTV2SA2N03A](#) [USBFTV2SA2N05A](#) [MDM9PH004B](#) [MDM9PH004P](#) [FTP-629Y401](#) [FTP-628Y302](#) [FTP-628Y402](#) [CSMNB9MF-5](#) [FNY-W6022](#) [UA-30AMF-SD7B03](#) [UA-30AMFM-SL7B03](#) [USBAPSCC7202A](#) [17-200641](#) [UES-1001A160](#) [UES-1003A160](#) [USBFTVX7SA2N20A](#) [FTP-629Y602](#) [USBCAMCM100](#) [USB A/F*2 to 2.54 2*5P-SH L=400mm](#) [68784-0075](#) [MINI-SCREW-USB-DATACABLE](#) [19800-010500-200-RS](#) [103-1092-BL-F0050](#) [103-1020-BL-00100](#) [103-1092-BL-F0200](#) [103-1092-BL-F0100](#) [105-1092-BL-00300](#) [105-1092-BL-00200](#) [105-1031-BL-00200](#)