




ACCLIMATE™

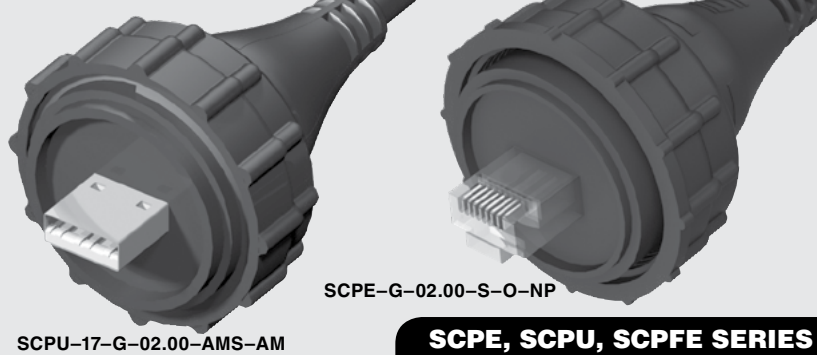

SCPE-G-02.00-S-O-NP

SCPU-17-G-02.00-AMS-AM

SCPE, SCPU, SCPFE SERIES

# IP68 SEALED USB & ETHERNET PLUGS

Mates with:  
SCRES

## SPECIFICATIONS

For complete specifications see [www.samtec.com?SCPE](http://www.samtec.com?SCPE)

**Insulator Material:** Polycarbonate  
**Contact Material:** Phosphor Bronze  
**Shield Material:** Phosphor Bronze  
**Wire:** 24 AWG  
**Overmold:** PA66 GF13 FR  
**Current Rating:** 3.8 A per pin (1 pin powered)  
**Operating Temp Range:** -40 °C to +70 °C  
**RoHS Compliant:** Yes

## DUST CAP

- DCA-17-02

**Note:**  
Some lengths, styles and options are non-standard, non-returnable.

TYPE	PLATING	WIRE LENGTH	END OPTION	O	NP
<b>SCPE</b> = Sealed Circular Ethernet Cable Plug	<b>-G</b> = 50 μ" (1.27 μm) Gold on Contact, Nickel on Shell	<b>-01.00</b> = (1 m) 39" Cable <b>-02.00</b> = (2 m) 79" Cable Standard lengths	<b>-D</b> = Double Ended (Both Ends Sealed) <b>-S</b> = Single Ended (End No. 1 Sealed)	<b>-O</b> = Outdoor Rated	<b>-NP</b> = Cat 5e (No polarization mates with SCRES -C5E)

## FIELD TERMINATION KIT

- Ethernet Field Termination Kit available for long cable run and small-opening applications so housings can be customer-installed after the runs are complete.
- SCPFE-17-G-01 Series (For cable outside diameter range of 5.00-5.75 mm)
- SCPFE-17-G-02 Series (For cable outside diameter range of 5.75-6.50 mm)

## ALSO AVAILABLE (MOQ Required)

- Other wire lengths

Mates with:  
SCRUS

## SPECIFICATIONS

For complete specifications see [www.samtec.com?SCPU](http://www.samtec.com?SCPU)

**Insulator Material:** Glass Filled Thermoplastic  
**Contact Material:** Copper Alloy  
**Shield Material:** CRS  
**Wire:** 20 AWG (Power), 25 AWG (Signal), 28 AWG (Drain)  
**Sealed Overmold:** PA66 GF13 FR  
**Operating Temp Range:** -20 °C to +75 °C  
**RoHS Compliant:** Yes

SCPU	SHELL SIZE	PLATING	WIRE LENGTH	END 1 OPTION	END 2 OPTION
<b>-17</b> (Standard USB only)	<b>-G</b> = 30 μ" (0.76 μm) Gold on Contact, Nickel on Shell	<b>-AMS</b> = USB A Type, Sealed <b>-BMS</b> = USB B Type, Sealed	<b>-01.00</b> = (1 m) 40" Cable <b>-02.00</b> = (2 m) 79" Cable Standard lengths (Assembled Length = Wire Length + (19.5 mm) .77")	<b>-AM</b> = USB A Type, Not Sealed	

## ALSO AVAILABLE (MOQ Required)

- Other wire lengths
- Other end options

## DUST CAPS & PANEL PLUG

- Dust Caps: DCA-17-01
- Panel Plug: SCPPA-17-01

**Note:**  
Some lengths, styles and options are non-standard, non-returnable.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ethernet Cables / Networking Cables](#) category:*

*Click to view products by [Samtec](#) manufacturer:*

Other Similar products are found below :

[73-6670-7](#) [73-6680-15](#) [73-7797-25](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [1200700174](#) [1200860368](#) [E16A06002M030](#) [E200102-009-S1](#)  
[AX105346-EW](#) [MT14-187L](#) [17-103530](#) [ERWPAB3002M005](#) [190-038045-01](#) [NK5EPC18RDY](#) [NK5EPC18VLY](#) [NK5EPC18YLY](#)  
[NK5EPC1GRY](#) [NK5EPC4Y](#) [NK5EPC6YLY](#) [NK5EPC8BLY](#) [NK5EPC9YLY](#) [1969343-6](#) [C501100010](#) [C501106002](#) [C501106007](#)  
[C501106015](#) [C501106025](#) [C601102010](#) [C601104010](#) [C601106007](#) [C601106015](#) [2142758-2](#) [2168427-2](#) [CAT1106007](#) [21949-1](#) [2J1866A](#)  
[RJF SFTP 5E 0500](#) [AX100351](#) [MN14CEC/ST](#) [C501100015](#) [C501106004](#) [C501106010](#) [C5F1108007](#) [C601104004](#) [C601106004](#)  
[CA21106004](#) [CA21106010](#) [CA21106015](#) [CA21109007](#)