


FLEXIBLE PIN COUNT TIGER EYE™ SOCKET

(1.27 mm) .050" PITCH • SFMC SERIES

MAX
2.9
A m p s

8
G b p s

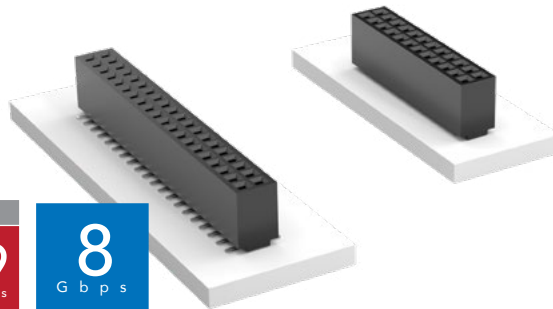

SFMC Board Mates: TFM

Cable Mates:
FMTP, FFMD*

*Note: Standard FFMD callout will not mate with FLE, SFMC. Must use gold plated callouts. (See drawing on web.)

| SFMC | 1 | NO. PINS PER ROW | LEAD STYLE | PLATING OPTION | D | OPTIONS |
|------|---|------------------|------------|----------------|---|---------|
|------|---|------------------|------------|----------------|---|---------|

02 thru 50

-01, -03
= Through-hole

-L1, -L3
= Low Insertion Force Through-hole

-02
= Surface Mount

-L2
= Low Insertion Force Surface Mount

-T1
= Through-hole Tiger Eye™ LITE

-T2
= Surface Mount Tiger Eye™ LITE

-L
= 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail

-K
= (4.00 mm) .157" DIA Polyimide film Pick & Place Pad (4 positions min.)

-P
= Plastic Pick & Place Pad (5 positions min.)

-TR
= Tape & Reel

-FR
= Full Reel Tape & Reel (must order max. quantity per reel; contact Samtec for quantity breaks)

SPECIFICATIONS

Insulator Material:
Black Liquid Crystal Polymer

Contact Material:

Tiger Eye™ = BeCu
Tiger Eye™ LITE = Phosphor Bronze

Plating:

Au or Sn over 50 μ" (1.27 μm) Ni

Current Rating:

2.9 A per pin (2 pins powered)

Voltage Rating:
220 VAC/310 VDC

Operating Temp Range:

-55 °C to +125 °C

Insertion Depth:



(3.05 mm) .120" to (4.06 mm) .160"

Normal Force:

Standard = 132 g (1.29 N) avg.
LIF = 90 g (0.88 N) avg.

Max Cycles:

10,000 with 30 μ" (0.76 μm) Au

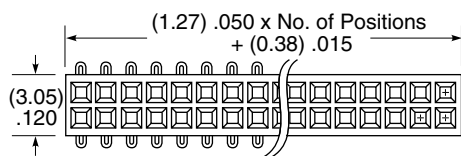

-P OPTION

PROCESSING

Lead-Free Solderable:



Yes

SMT Lead Coplanarity:

(0.10 mm) .004" max (02-26)

(0.15 mm) .006" max (27-50)*

*(.004" stencil solution may be available; contact IPG@samtec.com)

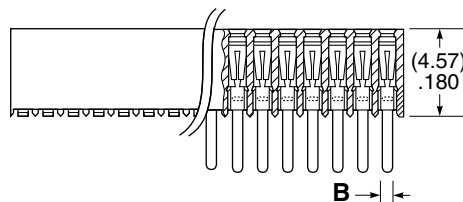

ALSO AVAILABLE

Other plating (MOQ Required)

| LEAD STYLE | A | B |
|---------------|-------------|-------------|
| -01, -L1, -T1 | (3.05) .120 | (0.51) .020 |
| -03, -L3 | (1.91) .075 | (0.41) .016 |

Note:

Some lengths, styles and options are non-standard, non-returnable.

View complete specifications at: samtec.com?SFMC

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)