


# ONE-PIECE INTERFACES

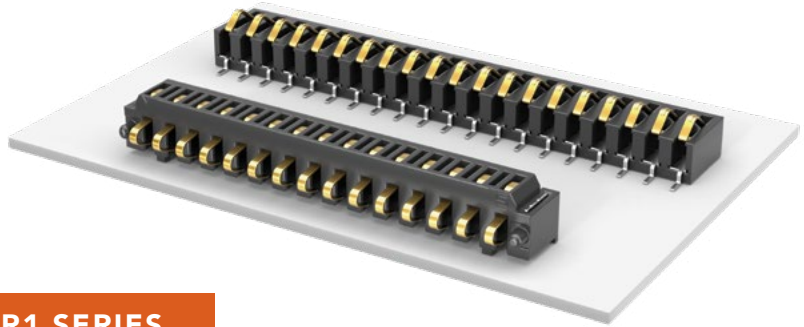

(2.54 mm) .100" PITCH • SIB/SIR1 SERIES

## SPECIFICATIONS

**Insulator Material:**  
Black Liquid Crystal Polymer  
**Contact Material:**  
Phosphor Bronze  
**Plating:**  
Au or Sn over  
50  $\mu$ " (1.27  $\mu$ m) Ni  
**Current Rating:**  
2.6 A per pin  
(1 pin powered)  
**Operating Temp Range:**  
-55 °C to +125 °C

<b>SIB</b>	-	<b>1</b>	<b>NO. OF POSITIONS</b>	-	<b>02</b>	<b>PLATING OPTION</b>	-	<b>S</b>	<b>OPTION</b>
------------	---	----------	-------------------------	---	-----------	-----------------------	---	----------	---------------

**02 thru 30**  
(Per Row)

**-F**  
= Gold flash on contact,  
Matte Tin on tail

**-LC**  
= Locking Clip  
(Manual placement required)



## PROCESSING

**Lead-Free Solderable:**  
Yes  
**SMT Lead Coplanarity:**  
(0.10 mm) .004" max (02-19)  
(0.15 mm) .005" max (20-30)\*  
\*(.004" stencil solution may be available; contact IPG@samtec.com)



**Notes:**  
The SIB Series is intended for vertical mating only.

Some lengths, styles and options are non-standard, non-returnable.



## SPECIFICATIONS

**Insulator Material:**  
Black LCP  
**Contact Material:**  
Phosphor Bronze  
**Weld Tab:**  
Phosphor Bronze  
**Plating:**  
Au or Sn over  
50  $\mu$ " (1.27  $\mu$ m) Ni  
**Current Rating:**  
2.8 A per pin  
(1 pin powered)

<b>SIR1</b>	-	<b>NO. OF POSITIONS</b>	-	<b>PLATING OPTION</b>	-	<b>S</b>	<b>OPTION</b>
-------------	---	-------------------------	---	-----------------------	---	----------	---------------

**-03, -05, -10, -15**  
(Per Row)

**-L**  
= 10  $\mu$ " (0.25  $\mu$ m)  
Gold on contact,  
Matte Tin on tail

**-S**  
= 30  $\mu$ " (0.76  $\mu$ m)  
Gold on contact,  
Matte Tin on tail

**-A**  
= Alignment Pin



**-K**  
= (4.00 mm) .157"  
DIA Polyimide  
Film Pick &  
Place Pad

**-TR**  
= Tape & Reel

**-FR**  
= Full Reel  
Tape & Reel  
(must order max.  
quantity per reel;  
contact Samtec for  
quantity breaks)

## PROCESSING

**Lead-Free Solderable:**  
Yes  
**SMT Lead Coplanarity:**  
(0.10 mm) .004" max

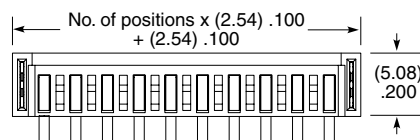

**Note:**  
Some lengths, styles and options are non-standard, non-returnable.

[samtec.com?SIB](http://samtec.com?SIB) or [samtec.com?SIR1](http://samtec.com?SIR1)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:*

*Click to view products by [Samtec](#) manufacturer:*

Other Similar products are found below :

[589158040000018](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68684-306](#) [75140-7012](#) [589159005003045](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [589159005002045](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#)