




SEI-110-02-GF-S-E-TR




SEI-120-02-GF-S



SIBF-10-F-S-AD



SIBF-25-F-S-AD



SIBF-05-F-S-AD



(1.00 mm) .0394" (SEI) (1.27 mm) .050" (SIBF)

SEI, SIBF SERIES

ONE-PIECE INTERFACE

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?SEI or see www.samtec.com?SIBF

Insulator Material:

SEI = Liquid Crystal Polymer
SIBF = Black Liquid Crystal Polymer

Contact Material:

Phosphor Bronze

Plating:

SEI = Au over 50 μm (1.27 μm) Ni
SIBF = Au or Sn over 50 μm (1.27 μm) Ni

Current Rating:

SEI = 2.3 A per pin (1 pin powered)
SIBF = 2.5 A per pin (1 pin powered)

Operating Temp Range:

-55 °C to +125 °C

Mating Force:

SEI = 50 g (0.49 N) per contact

Voltage Rating:

SEI = 250 VAC
SIBF = 155 VAC

Cycles:

SEI = 100 min

Contact Deflection:

SEI = (0.46 mm) .018" nominal

RoHS Compliant:

Yes

PROCESSING

Lead-Free Solderable:

Yes

SMT Lead Coplanarity (SEI):

(0.10 mm) .004" max (05-25)

(0.15 mm) .006" max (30)*

*(.004" stencil solution may be available; contact IPG@samtec.com)

SMT Lead Coplanarity (SIBF):

(0.10 mm) .004" max (05-20)

(0.15 mm) .006" max (25)*

*(.004" stencil solution may be available; contact IPG@samtec.com)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



05, 10, 15,
20, 25, 30
(Standard sizes)

-G
= 10 μm (0.25 μm) Gold

-GF
= 3 μm (0.08 μm) Gold flash

Leave blank for Short Version (No screw down inserts or holes)

-E
= #2-56 x 1/16" screw thread

-M
= 2.00 mm x 0.40 mm screw thread


Leave blank for no Alignment Pin

-AT
= Alignment Pin Top Side

-AB
= Alignment Pin Bottom Side

-TR
= Tape & Reel

-FR
= Full Reel Tape & Reel (must order max. quantity per reel; Contact Samtec for quantity breaks)

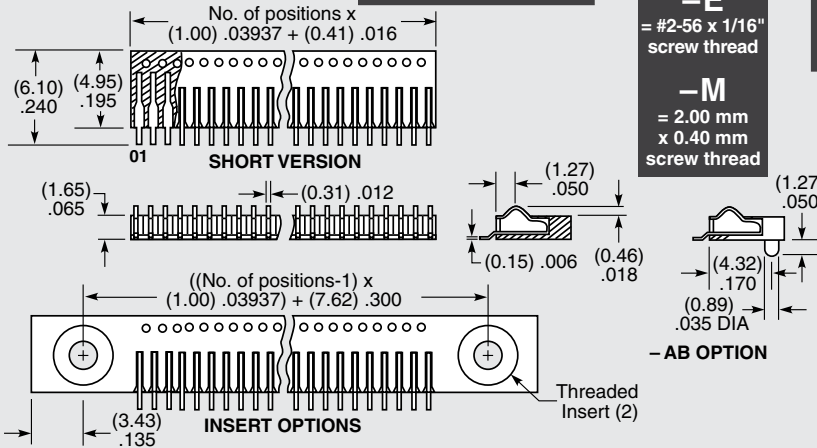

SIBF

NO. OF POSITIONS

PLATING OPTION


S

OPTION

-05, -10, -20, -25

-F
= Flash Gold, Matte Tin on tail

-AD
= Top & Bottom Alignment Pin

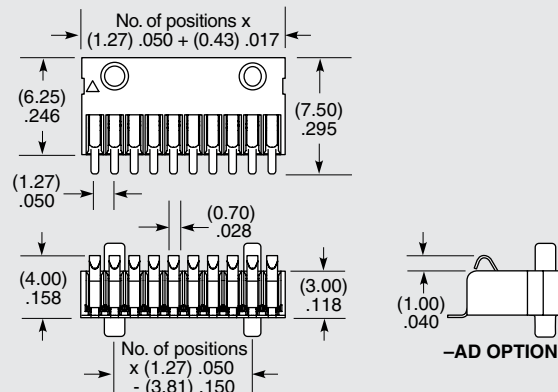

ALSO AVAILABLE (MOQ Required)

- Additional positions
- Top or bottom side only alignment pin

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68684-306](#) [75140-7012](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#) [AXE720127](#)