

(2.54 mm) .100"

SL, SDL SERIES

LOW-PROFILE MACHINED SOCKET STRIPS

FEATURES

- Achieve low-profile without sacrificing insertion depth!
- Choice of four precision screw machined lead styles.
- Exceptionally low-profile, down to (2.11 mm) .083" off of board.
- Mates with BBL or BDL for board stacking spaces down to (3.89 mm) .153"

SPECIFICATIONS

For complete specifications see www.samtec.com?SL or www.samtec.com?SDL

Insulator Material:
Black Glass Filled Polyester (SDL)
Black Liquid Crystal Polymer (SL)

Contact/Shell Materials:
BeCu/Brass
Plating:

Au or Sn over
50 μ" (1.27 μm) Ni

Operating Temp Range:
-55 °C to +125 °C with Gold
-55 °C to +105 °C with Tin

RoHS Compliant:

Yes
Lead-Free Solderable:
SL: Yes
SDL: No, Lead Wave only


RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality




FILE NO. E111594

Mates with:
TS, TD, HTS, BBS, BBD,
BBL, BDL, BHS

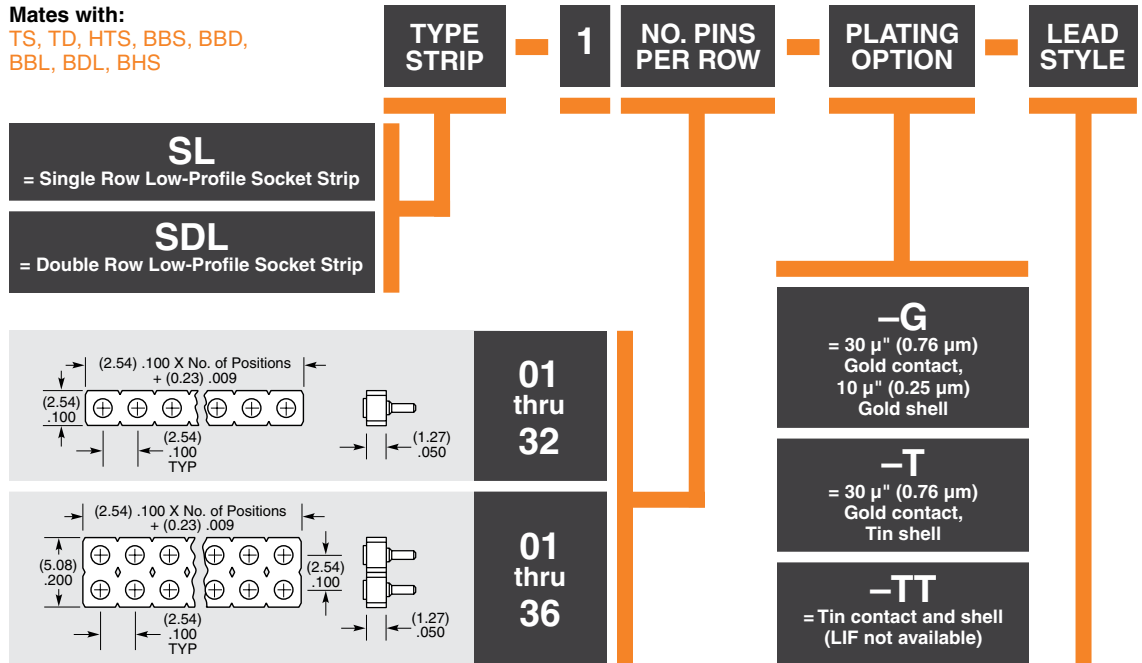

Low Insertion Force (LIF) Available

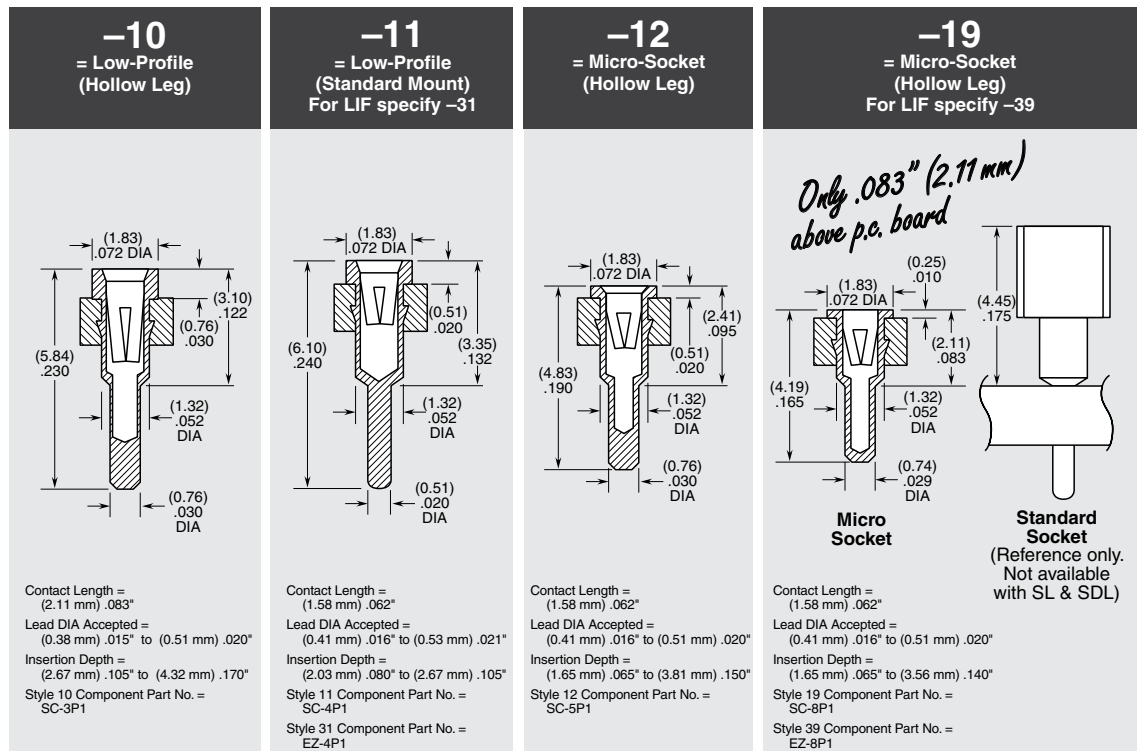

Note:
Some lengths, styles and options are non-standard, non-returnable.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [79531-3000](#) [FCN-](#)
[360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#)