


TIGER CLAW™ SURFACE MOUNT SOCKET

(2.54 mm) .100" PITCH • SSM SERIES

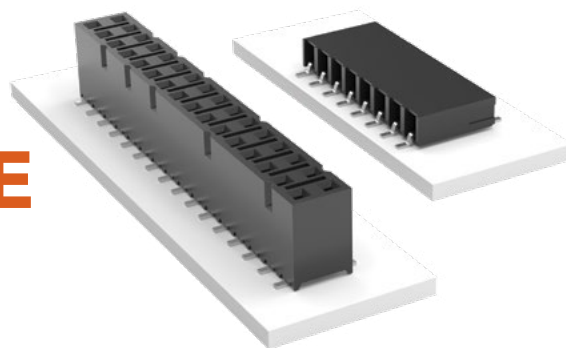

SSM

Mates:

TSW, MTSW,
TST, TSS, ZST, ZSS,
DW, EW, ZW, TSM,
HMTSW, HTSW, TSSH,
BST, HTSS, TLW, MTLW

SPECIFICATIONS

Insulator Material:

Black Liquid Crystal Polymer

Contact Material:

Phosphor Bronze

Plating:

Au or Sn over
50 μ" (1.27 μm) Ni

Current Rating (SSM/TSW):

5.2 A per pin
(2 pins powered)

Voltage Rating:

405 VAC / 572 VDC

Operating Temp Range:

-55 °C to +125 °C with Gold
-55 °C to +105 °C with Tin

Insertion Depth:

SV/DV = (4.34 mm) .171" to
(7.24 mm) .285" or pass-through
from top; (5.56 mm) .219"
plus board thickness minimum
from bottom;

SH/DH = (4.34 mm) .171" to
(6.35 mm) .250"

Normal Force:

125 grams (1.21 N) average

PROCESSING

Lead-Free Solderable:

Yes

-DH Coplanarity:

Less than 28 positions

(0.15 mm) .006" max*

More than 27 positions

(0.20 mm) .008" max*

-SH, -SV, -DV Coplanarity:

(0.15 mm) .006" max*

*(.004" stencil solution
may be available; contact
IPG@samtec.com)












ALSO AVAILABLE

Alignment pin
(MOQ Required)



Note:
Some lengths, styles and
options are non-standard,
non-returnable.

SSM	1	NO. PINS PER ROW	PLATING OPTION	ROW OPTION	OTHER OPTION
		02 thru 36 (-SV, -SH, -DH)	-F = Gold flash on contact, Matte Tin on tail	-SV = Single Row Vertical Pin	-“XXX” = Polarized Position (-BE not available)
		02 thru 40 (-DV)	-L = 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail	-DV = Double Row Vertical Pin	-BE = Bottom Entry (-DV & -SV only)
			-S = 30 μ" (0.76 μm) Gold on contact, Matte Tin on tail	-SH = Single Row Horizontal Pin	-LC = Locking Clip (-DV & -SV only) Contact Samtec for -DH & -SH
				-DH = Double Row Horizontal Pin	-K = (6.50 mm) .256" DIA Polyimide film Pick & Place Pad (2 positions min.) -DV & -SV only
					-M = Metal Pick & Place Pad (5 positions min.) -DV only
					-P = Plastic Pick & Place Pad (-DV & -SV only) (6 positions min.) Contact Samtec for availability on smaller positions)
					-TR = Tape & Reel (29 positions max.)
					-FR = Full Reel Tape & Reel (must order max. quantity per reel; contact Samtec for quantity breaks) (29 positions max.)



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)