



(2.00 mm) .0787"

TCSD SERIES

GER EYE" IDC SOCKET CABLE

Mates with:

TMM, TMMH, STMM, MMT, TW, MTMM, EHT, ETMM (-SR), ZSTMM

SPECIFICATIONS

For complete specifications see www.samtec.com?TCSD

Insulator Material:

Black Glass Filled Polyester Contact:

Plating: Au or Sn over 50 μ" (1.27 μm) Ni Wire:

28 AWG 7/36 Stranded, Tinned, Copper with Gray PVC Insulator

Current Rating (TCSD/STMM):

2.8 A per pin (2 pins powered)

Operating Temp Range: -40 °C to +105 °C Lead Size Accepted: (0.48 mm) .019" to (0.53 mm) .021"

Insertion Depth: (2.87 mm) .113" to (3.17 mm) .125" RoHS Compliant:

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality




ALSO AVAILABLE (MOQ Required)

- · Other sizes
- · Other platings

POLARIZING KEY

Specify PK-01-07 for polarizing key (Available in wheels of six each). Also polarizes SMM Series socket strips.

TCSD Series assemblies are non-standard, non-returnable.

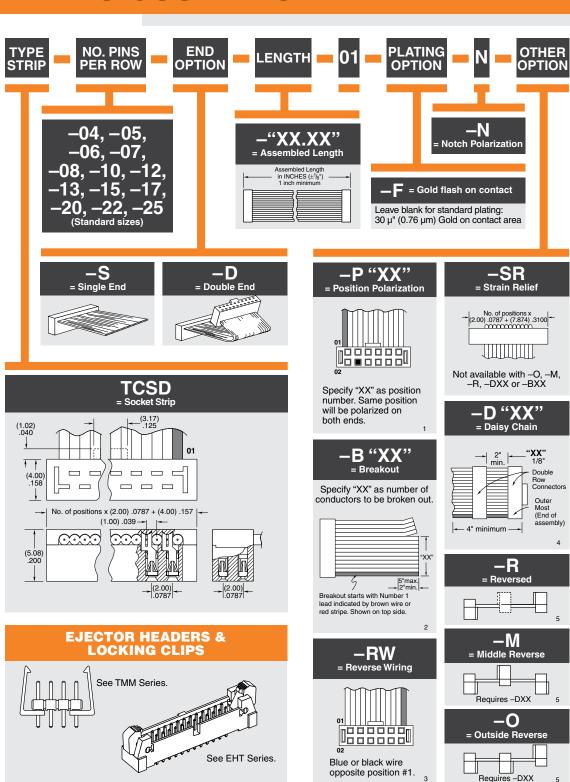

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ribbon Cables / IDC Cables category:

Click to view products by Samtec manufacturer:

Other Similar products are found below:

FSK-12A AWG28-10G EHJ3C EHJ4C cab-LVDV-PWR-10-15 FSP-25A 3365/15 (100FT) cab-LVDV-DAT-34-15 49635-C62-S2 1-3636-600-5204 92315-1408 426171120-3 3625/08 (100M) 0044704 2-1589735-3 JSM015PP2DCC23N 92301-0283 ACL-eSSI-2 92301-0718 MMSDT-06-20-S-05.5-D-K-LDX IDD-04-G NM-2J2-051-PS1-JJAB 1700/14SF (100FT) 1700/26SF (100FT) 1700/34SF (100FT) 3801/09 (100FT) 119-885 DS1057-06A282R-30.5 DS1057-12A282R-30.5 DS1057-14A282R-76.5 DS1057-20A282R-76.5 DS1057-24A282R-76.5 DS1057-26A282R-76.5 DS1057-30A282R-76.5 DS1057-34A282R-76.5 DS1057-40A282R-76.5 DS1057-60A282R-76.5 DS1057-64A282R-76.5 DS1058-30M28-30.5 3750/10 (100FT) 0015712 0015905 S30109 11203 11223 11243 11262 0037147 0022512