

# .025"sq TERMINAL STRIPS TSW SERIES

Mates with:  
SSW, SSQ, ESW, ESQ,  
BCS, BSW, IDSD, IDSS,  
CES, SLW

## SPECIFICATIONS

For complete specifications see [www.samtec.com?TSW](http://www.samtec.com?TSW)

### TSW

**Insulator Material:** Black Glass Filled Polyester  
**Terminal Material:** Phosphor Bronze  
**Plating:** Au or Sn over 50µ" (1,27µm) Ni  
**Operating Temp Range:** -55°C to +125°C with Gold  
-55°C to +105°C with Tin  
**Voltage Rating:** 550 VAC mated with SSW; 500 VAC mated with BCS or ESQ; 450 VAC -RA/-RE mated with BCS or SSM  
**RoHS Compliant:** Yes



### CURRENT RATING

AMBIENT TEMPERATURE	TSW mated with SSW
20°C	7A
40°C	6A
60°C	4A
80°C	3A

**Processing:**  
Lead-Free Solderable:  
Wave Only

## SPECIFICATIONS

For complete specifications see [www.samtec.com?HTSW](http://www.samtec.com?HTSW)


### HTSW

Same as TSW except:  
**Insulator Material:** Natural Liquid Crystal Polymer



### Processing:

**Max Processing Temp:** 230°C for 30 to 60 seconds, or 260°C for 20 seconds 3x  
**Lead-Free Solderable:** Yes




**Note:** Some lengths, styles and options are non-standard, non-returnable.

TYPE STRIP	PIN CENTERS	NO. PINS PER ROW
<p><b>TSW</b> = Standard Strip</p> <p><b>HTSW</b> = Hi-Temp Strip</p>	<p><b>-1</b> = .100" (2,54mm) Centers, All Positions Filled</p>	<p><b>-2</b> = .200" (5,08mm) Centers, Every Other Position Filled</p>

Straight Pin Versions	Right Angle Versions	Pin Style
<p>TSW HTSW</p>		<p>-S</p> <p>-D</p> <p>-T</p> <p>-Q</p>
<p><b>01 thru 50</b> = .100" (2,54mm) Center Version</p>		
<p><b>02 thru 25</b> = .200" (5,08mm) Center Version</p>		


Due to technical progress, all designs, specifications and components are subject to change without notice.

## WWW.SAMTEC.COM




TSW-112-07-G-T


TSW-109-09-S-D-RA



TSW-120-13-L-D



TSW-112-16-T-S-RE



**LEAD STYLE**

**PLATING OPTION**

**ROW OPTION**

**OTHER OPTIONS**

**ALSO AVAILABLE**

- F**  
= Gold flash on contact area, Matte Tin on tail
- L**  
= 10µ" (0,25µm) Gold on contact area, Matte Tin on tail
- G**  
= 10µ" (0,25µm) Gold on contact area, Gold flash on balance
- T**  
= Matte Tin
- S**  
= 30µ" (0,76µm) Gold on contact area, Matte Tin on tail





- S**  
= Single Row
- D**  
= Double Row
- T**  
= Triple Row
- Q**  
= Double Row (5,08mm) .200" row space

- RA or -RE**  
= Right Angle
- LL** = Locking Lead
- LA**  
= -RA Option with -LL Option

- LC**  
= Locking Clip (Styles -08 thru -13 & -22 only)
- 
- Requires 4 pin minimum (NA with -T, -Q, -RA or -RE)

- "XXX"**  
= Polarized Position

Elevated Right Angle option. Call Samtec.




Shunts See SNT Series

**Straight Pin Versions**  
(Specify "LEAD STYLE" from chart)

STYLE	A	B	C
* -05	(3,30) .130	(8,51) .335	(2,67) .105
* -06	(2,41) .095	(7,62) .300	(2,67) .105
* -07	(2,54) .100	(10,92) .430	
* -08	(5,08) .200	(13,46) .530	
* -09	(10,16) .400	(18,54) .730	(5,84) .230
* -10	(12,70) .500	(21,08) .830	
* -11	(15,24) .600	(23,62) .930	
* -12	(17,78) .700	(26,16) 1,030	
* -13	(22,86) .900	(31,24) 1,230	
* -14	(2,79) .110	(13,46) .530	(8,13) .320
* -15		(18,54) .800	(13,21) .520
* -16	(7,87) .310	.730	(8,13) .320
* -17	(2,79) .110	(21,08) .830	(15,74) .620

STYLE	A	B	C
* -18		(23,62) .930	(18,29) .720
* -19	(2,79) .110	(26,16) 1,030	(20,83) .820
* -20		(31,24) 1,230	(25,91) 1,020
* -21		(36,32) 1,430	(30,99) 1,220
* -22	(7,62) .300	(16,00) .630	(5,84) .230
* -23	(2,92) .115	(11,30) .445	
* -24	(5,33) .210	(12,15) .480	(6,73) .265
* -25	(3,20) .126	(16,00) .630	(8,13) .320
* -26	(25,40) 1,000	(11,58) .456	(5,84) .230
* -27	(20,32) .800	(33,78) 1,330	
* -28	(23,11) .910	(28,70) 1,130	
* -29	(18,03) .710	(33,78) 1,330	(8,13) .320
* -30	(0,89) .035	(9,27) .365	(5,84) .230
* -41+	(1,27) .050	(11,94) .470	(8,13) .320

\*Available with -LL (Locking Lead) Option





\*\*Except: Style -26 (0,46) .018 DIA Tail

+ Style -41 & -42 available with HTSW only.

**Right Angle Versions**  
(Specify "LEAD STYLE" from chart)

-RA LEAD STYLE	SINGLE (-S)		DOUBLE (-D)		TRIPLE (-T & -Q)	
	A	C	A	A	A	C
* -08	(2,29) .090		(2,29) .090	(2,29) .090		
* -09	(7,37) .290		(7,37) .290	(7,37) .290		
-10	(9,91) .390	(5,84) .230	(9,91) .390	(9,91) .390		(5,84) .230
-11	(12,45) .490		(12,45) .490	(12,45) .490		
-12	(14,99) .590		(14,99) .590	(14,99) .590		
-13	(20,07) .790		(20,07) .790		N/A	
* -16	(5,08) .200	(8,13) .320	(5,08) .200	(5,08) .200		
-21	(25,15) .990	(5,84) .230	N/A	N/A		
* -22	(4,83) .190		(4,83) .190	(4,83) .190		(5,84) .230
* -25	(2,54) .100	(8,13) .320	(2,54) .100	(2,54) .100		
-27	(22,61) .890	(5,84) .230	N/A	N/A		
-28	(17,53) .690		(17,53) .690		N/A	
-29	(20,32) .800	(8,13) .320	N/A	N/A		
-30	(15,24) .600		(15,24) .600			

\*Available with -LA (Locking Lead) Option

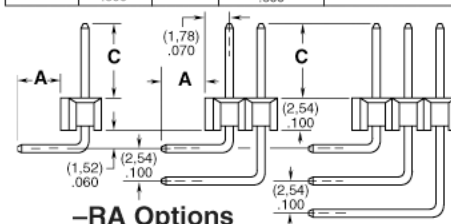

Due to technical progress, all designs, specifications and components are subject to change without notice.

**WWW.SAMTEC.COM**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Samtec](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [009176003701906](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#)