

USB3-B-S-F-TH



USB3-A-S-S-TH



USB3-A, USB3-B SERIES

USB 3.0 INTERFACES

USB3-A Mates with:
USBC3-AM

USB3-B Mates with:
USBC3-BM

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?USB3-A or www.samtec.com?USB3-B

Insulator Material:

Nylon 6T Blue

Contact Material:

Phosphor Copper

Plating:

Au or Sn over 50µ" (1,27µm) Ni

Shield Plating:

50µ" (1,27µm) Ni

Front Shield:

Phosphor Copper

Back Shield:

Brass

Operating Temp Range:

-50°C to +85°C

Current Rating:

1.8 A per power (VBUS) contact and ground contact, 0.25A per other contact

Voltage Rating:

100 VAC

Contact Resistance:



30 mΩ max power and ground, 50 mΩ max for other contact

Minimum Cycles:

5000

RoHS Compliant:

Yes

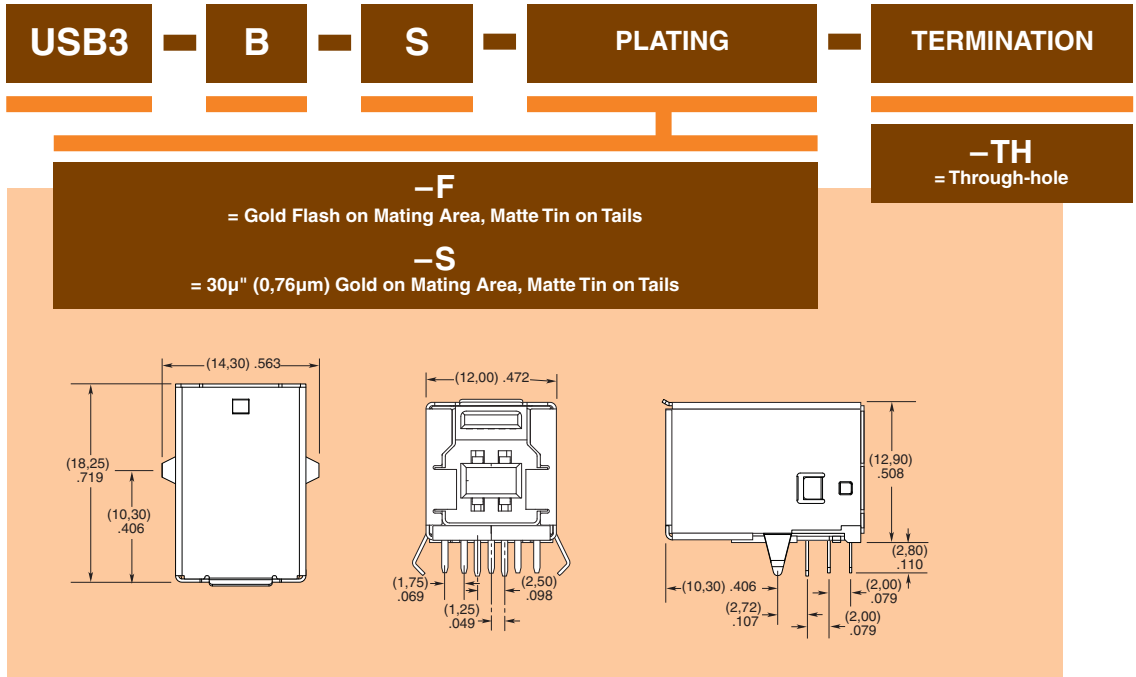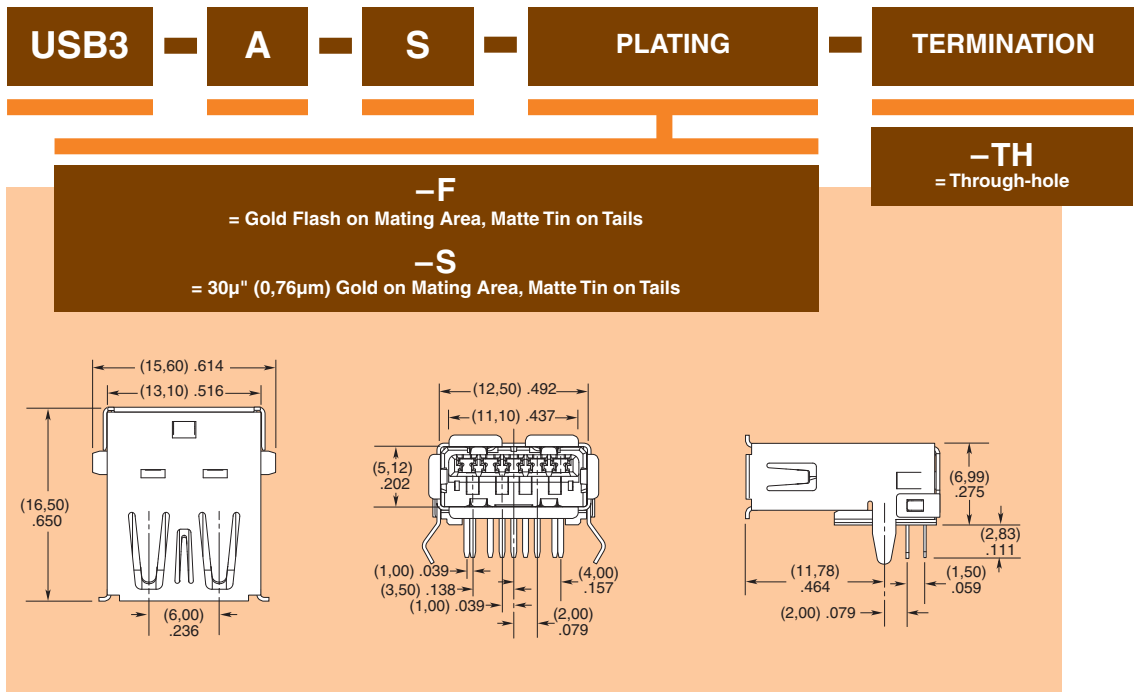

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[950](#) [A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [MUSBA511N5](#) [MUSBD11135](#) [217450-1](#) [KMBVX-TH-5S-B30](#) [896-30-004-00-000000](#)
[KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W30](#) [935](#) [957](#) [30-498-6](#) [SK-60A-2](#) [1734082-1](#) [CIR08AF-20-27S-F80-20](#) [CIR08F-20](#) [30-1574](#) [30-470](#) [30-489](#) [30-541](#) [30-572-3](#) [A-USB A-2P-C](#) [MIKROE-1451](#) [USBFTV2PEM2G](#) [USBFTVC6ZN](#) [USBFTVSCCG](#) [4689-1](#) [1-1734084-2](#)
[CIR08F-20-27P-F80-VO](#) [USBF21ZNSCC](#) [USBBFTV6ZC](#) [MUSBB151341](#) [10135326-001LF](#) [M9177/3-1](#) [USB-A-S-F-B-VT](#) [925](#) [4198](#) [690-024-633-031](#) [UB-20PMFP-LC7001](#) [USBFTVC6MRG](#) [UA-20BMFA-SL8001](#) [17-200011](#) [USBFTVC7ZC](#) [UB-20AFMM-LL7A01](#)
[USBFTVC2MN](#) [CAP-WCCMLPB1](#) [CAP-WCCMLPC1](#) [2041386-1](#) [2274475-3](#)