

(1.27 mm) .050"

YFS SERIES

LOW-PROFILE OPEN-PIN-FIELD SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?YFS

Insulator Material:

Black Liquid Crystal Polymer Contact Material:

Phosphor Bronze Plating:

Plating: Au over 50 µ" (1.27 µm) Ni Operating Temp Range: -55 °C to +125 °C Working Voltage: 275 VAC when mated with YFT

Mated Cycles: 200 with YFT

RoHS Compliant:

Lead-Free Solderable:


RECOGNITIONS


For complete scope of recognitions see www.samtec.com/quality



ALSO AVAILABLE (MOQ Required)

- 30, 40 & 50 positions in 5 & 8 rows
- 3 & 6 rows

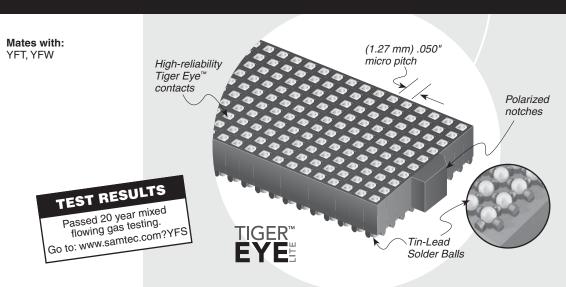

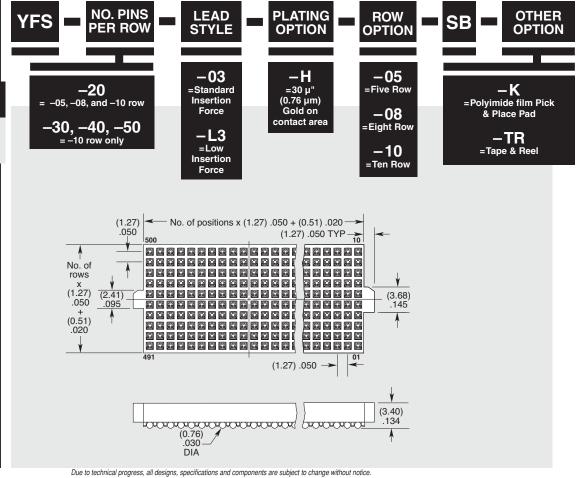

Some sizes, styles and options are non-standard, non-returnable.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Board to Board & Mezzanine Connectors category:

Click to view products by Samtec manufacturer:

Other Similar products are found below:

10135583-642402LF 89885-310LF 589158040000018 6-1393048-0 68683-613 MDF7-12DP-2.54DSA MDF7-18P-2.54DSA(01) MDF7-20DP-2.54DSA MDF7-26D-2.54DSA(55) MDF7-3P-2.54DSA(01) MDF7B-3P-2.54DSA(55) MDF7C-11P-2.54DSA(55) MDF7C-18P-2.54DSA(55) MDF7C-5P-2.54DSA(01) MDF7P-5P-2.54DSA(55) 75234-0516 FCN-230C068-11 FCN-268F012-G/BD FCN-268F036-G/BD FCN-268M012-G/0D FCN-268M024-G/1D FCN-360C008-C FCN-360C040-C FCN-723J004/1 MIS-048-01-F-D-DP-K 832-10-034-10-001000 93696-325LF 11828-1FA AXK630345P 18097-0013 ICA-328STT 2007042-2 304400-2 FCN-214Q030-G/0 FCN-215Q040-G/0 FCN-230C068-ESA FCN-234P048-G/0 FCN-235D050-G/C FCN-360A3 FCN-360C040-B 210-93-314-41-105000 2-22603-0 379-064-521-202 MDF7-12P-2.54DSA(01) MDF7-16P-2.54DS(56) MDF7-40DP-2.54DSA(55) MDF7-8P-2.54DSA(55) MDF7B-16P-2.54DSA(55) AXG720047 5031084030