

(2.00 mm) .0787"

YTS, YTQ SERIES

HIGH-DENSITY SOCKET STRIP

SPECIFICATIONS

For complete specifications see www.samtec.com?YTS or www.samtec.com?YTQ

Insulator Material:
Black Liquid Crystal Polymer

Contact Material:
Phosphor Bronze

Operating Temp Range:
-55 °C to +125 °C

Plating:

Sn or Au over
50 μ" (1.27 μm) Ni

Insertion Depth:
(2.62 mm) .103" to
(5.03 mm) .198"

Max Cycles:
100 with 10 μ" (0.25 μm) Au

RoHS Compliant:
Yes

Mates with:
YTT, YTW, YTE, TMMS



Choice of four,
five or six row

(2.00 mm)
.0787" pitch

(6.35 mm)
.250"

(2.00 mm)
.0787" TYP


PROCESSING

YTS Lead-Free Solderable:
Wave Only

YTQ Lead-Free Solderable:
Wave or reflow with
Matte Sn plating

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality

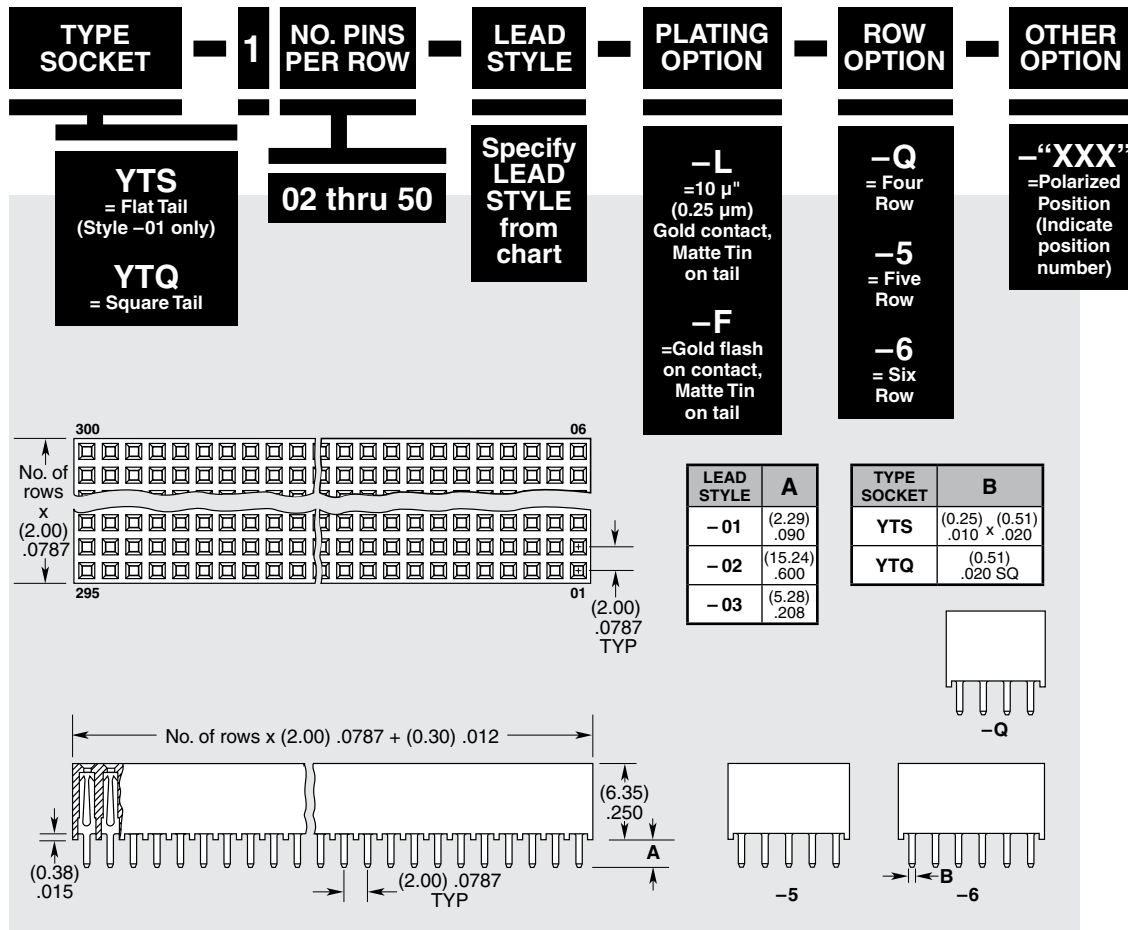

Note:
Some lengths, styles and options are non-standard, non-returnable.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68684-306](#) [75140-7012](#) [589159005003045](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [589159005002045](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#)