

HIGH-SPEED COMPRESSION INTERPOSER

(0.80 mm) .0315" AND (1.00 mm) .0394" PITCH

FEATURES & BENEFITS

- Dual compression contacts or single compression with solder balls
- BeCu Micro-formed contacts
- Performance up to 14 Gbps (ZAX Series)
- Low-profile body height for a short signal path
- Highly customizable solutions
- Visit samtec.com?ZRDP for ultra-low profile Z-Ray[®] cable assembly






Solder Ball Option

BeCu Compression Contacts

Design & Construction

F-221 (Rev 17JUN21)

- One-piece design assembled into rugged low profile FR4 substrate under high pressure and temperature
- Built standard with a 1 mm board-to-board thickness
- Contacts are designed using BeCu foils that have been formed into the "beam" structure

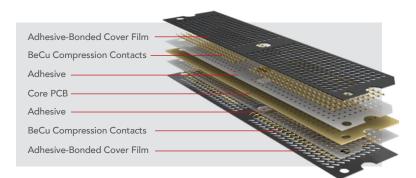

PERFORMANCE SPECIFICATIONS

Single Compression w/ Solder Balls			Dual Compression		
Series		ZA8	ZA1	ZA8	ZA1
Pitch		0.80 mm	1.00 mm	0.80 mm	1.00 mm
Max Row		25	20	50	58
Max Column		25	20	50	58
Thickness	FR4 Core	1.00 to 3 mm	1.00 to 3 mm	0.5 to 3 mm	0.5 to 3 mm
Thickness Tolerance	FR4 Core	±10%	±10%	±10%	±10%
Deflection / Normal Force per Pin		0.20 mm / 30g			
Operating Temperature		-55°C to +105°C (Single Cycle only above 85°C)			


samtec.com/ZRAY







ZA8

(0.80 mm) .0315" PITCH • HIGH-SPEED COMPRESSION INTERPOSER

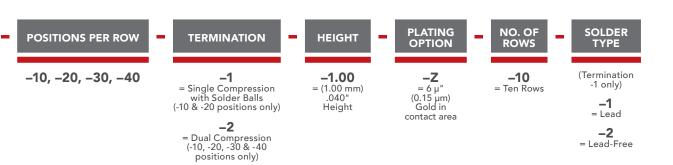






40 X 20 DUAL COMPRESSION

POSITIONS PER ROW	A	В	
-10	(12.50) .492	(9.35) .368	
-20	(20.50) .807	(17.35) .683	
-30	(31.70) 1.248	N/A	
-40	(39.70) 1.563	N/A	

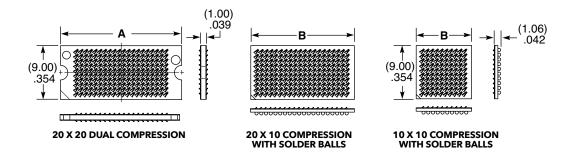

Notes: Some sizes, styles and options are non-standard, non-returnable

View complete specifications at: samtec.com?ZA8

Unless otherwise approved in writing by Samtec, all parts and components are designed and built according to Samtec's specifications which are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Board to Board & Mezzanine Connectors category:

Click to view products by Samtec manufacturer:

Other Similar products are found below :

 589158040000018
 FCN-230C068-11
 FCN-268F012-G/BD
 FCN-268F036-G/BD
 FCN-268M012-G/0D
 FCN-268M024-G/1D
 FCN

 723J004/1
 MIS-048-01-F-D-DP-K
 832-10-034-10-001000
 FX4C-80S-1.27DSA
 FCN-214Q030-G/0
 FCN-234P048-G/0
 FCN-235D050-G/C

 210-93-314-41-105000
 2-22603-0
 MDF7-40DP-2.54DSA(55)
 AXG720047
 5031084030
 MIT-114-03-F-D-K
 55323-1519
 DF33-2P

 3.3DSA(24)
 YFT-20-05-H-03-SB-K
 503308-3040
 026-6203-PDB
 027-6203-PDB
 069159702701000
 10123981-102LF
 101A10019X

 55650-0588-C
 68684-306
 75140-7012
 589159005003045
 194261-1
 FCN-268F024-G0D
 10124054-515LF
 68685-603
 8-1616154-3
 MIS

 019-01-F-D
 589159005002045
 541371078
 IL-WX-10PB-HF-B-E1000E
 FCN-268M024-G/3D
 20021832-06016C1LF
 KX15-20KLDL

 E1000E
 MDF7-16DP-2.54DSA(55)
 AXE810124
 FCN-214J100-G/0
 FCN-230C068-E/S
 AXE812124
 AXE816124