


FLEX STACK

SHROUDED HEADERS & STACKERS

(1.27 mm) .050" PITCH • TML/ZML SERIES

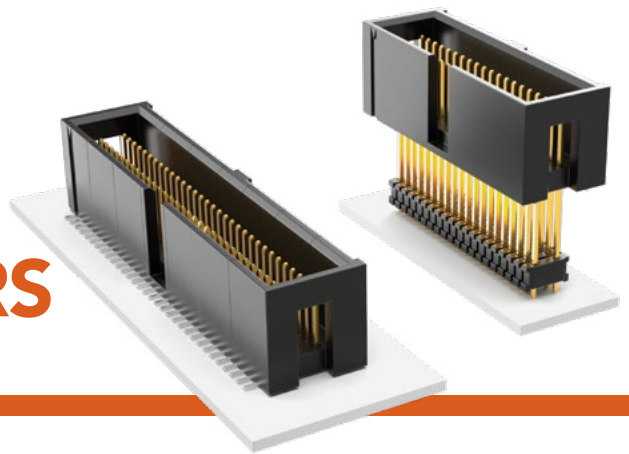

TML/ZML

Mates:
SMS, RSM

SPECIFICATIONS

TML

Insulator Material:
Black Liquid Crystal Polymer
Insulation Resistance:
5000 MΩ min
Terminal Material:
Phosphor Bronze
Plating:
Au or Sn over
50 μ" (1.27 μm) Ni
Operating Temp Range:
-55 °C to +105 °C with Tin;
-55 °C to +125 °C with Gold

ZML

Insulator Material:
Black Liquid Crystal Polymer
Terminal Material:
Phosphor Bronze
Plating:
Au or Sn over
50 μ" (1.27 μm) Ni
Operating Temp Range:
-55 °C to +105 °C with Tin;
-55 °C to +125 °C with Gold

PROCESSING

TML

Lead-Free Solderable:
Yes
SMT Lead Coplanarity:
(0.10 mm) .004" max (05-20)
(0.15 mm) .006" max (32)*
*(.004" stencil solution
may be available; contact
IPG@samtec.com)

ZML

Same as TML except:
SMT Lead Coplanarity:
(0.15 mm) .006" max*
*(.004" stencil solution
may be available; contact
IPG@samtec.com)

ALSO AVAILABLE
MOQ Required

Other sizes
Other platings

Notes:

For added mechanical stability, Samtec recommends mechanical board spacers be used in applications with gold or selective gold plated connectors. Contact ipg@samtec.com for more information.

Some sizes, styles and options are non-standard, non-returnable.

TML	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	D	TAIL OPTION	OTHER OPTION								
		05, 08, 10, 20, 32 (Standard sizes)	Specify LEAD STYLE from chart	-L = 10 μ" (0.25 μm) Gold on post, Matte Tin on tail -G = 10 μ" (0.25 μm) Gold on post, Gold flash on tail		(Leave blank for Through-hole) -RA = Right-angle -SM = Surface Mount (For locking clip add -LC)	- "XXX" = Polarized position (Specify position of omitted pin)								
						<table border="1"> <thead> <tr> <th>LEAD STYLE</th> <th>POST HEIGHT (A)</th> </tr> </thead> <tbody> <tr> <td>-01</td> <td>(3.05) .120</td> </tr> <tr> <td>-02</td> <td>(5.84) .230</td> </tr> <tr> <td>-03</td> <td>(4.32) .170</td> </tr> </tbody> </table>		LEAD STYLE	POST HEIGHT (A)	-01	(3.05) .120	-02	(5.84) .230	-03	(4.32) .170
LEAD STYLE	POST HEIGHT (A)														
-01	(3.05) .120														
-02	(5.84) .230														
-03	(4.32) .170														

ZML	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	D	BODY HEIGHT	TAIL OPTION												
		05, 08, 10, 20, 32 (Standard sizes)	Specify LEAD STYLE from chart	-L = 10 μ" (0.25 μm) Gold on post, Matte Tin on tail -G = 10 μ" (0.25 μm) Gold on post, Gold flash on tail		(Leave blank for Through-hole) - "XXX" = -SM Body Height (Specify board space "B" in inches from lead style charts.) -SM = Surface Mount	(Leave blank for Through-hole)												
						<table border="1"> <thead> <tr> <th colspan="2">THROUGH-HOLE</th> </tr> <tr> <th>LEAD STYLE</th> <th>BODY HEIGHT (C)</th> </tr> </thead> <tbody> <tr> <td>-01</td> <td>(12.83) .505</td> </tr> <tr> <td>-02</td> <td>(14.22) .560</td> </tr> <tr> <td>-03</td> <td>(16.64) .655</td> </tr> <tr> <td>-04</td> <td>(19.69) .775</td> </tr> </tbody> </table>		THROUGH-HOLE		LEAD STYLE	BODY HEIGHT (C)	-01	(12.83) .505	-02	(14.22) .560	-03	(16.64) .655	-04	(19.69) .775
THROUGH-HOLE																			
LEAD STYLE	BODY HEIGHT (C)																		
-01	(12.83) .505																		
-02	(14.22) .560																		
-03	(16.64) .655																		
-04	(19.69) .775																		
						<table border="1"> <thead> <tr> <th colspan="3">SURFACE MOUNT</th> </tr> <tr> <th>LEAD STYLE</th> <th>POST HEIGHT (A)</th> <th>BODY HEIGHT (B)</th> </tr> </thead> <tbody> <tr> <td>-53</td> <td>(3.05) .120</td> <td>(13.46) .530 to (20.19) .795</td> </tr> <tr> <td>-54</td> <td>(5.84) .230</td> <td>(13.46) .530 to (17.40) .685</td> </tr> </tbody> </table>		SURFACE MOUNT			LEAD STYLE	POST HEIGHT (A)	BODY HEIGHT (B)	-53	(3.05) .120	(13.46) .530 to (20.19) .795	-54	(5.84) .230	(13.46) .530 to (17.40) .685
SURFACE MOUNT																			
LEAD STYLE	POST HEIGHT (A)	BODY HEIGHT (B)																	
-53	(3.05) .120	(13.46) .530 to (20.19) .795																	
-54	(5.84) .230	(13.46) .530 to (17.40) .685																	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68684-306](#) [75140-7012](#) [589159005003045](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [589159005002045](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#)