



FLEX STACK

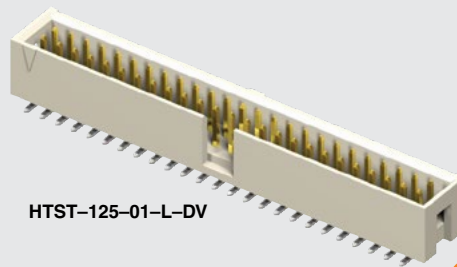

HTST-125-01-L-DV



(2.54 mm) .100"

TST, HTST, ZST SERIES

SHROUDED .025" SQ POST IDC HEADERS

Mates with:
IDSD, HCSD

SPECIFICATIONS

For complete specifications
www.samtec.com?TST,
www.samtec.com?HTST or
www.samtec.com?ZST

Insulator Material:

TST, ZST: Black Glass Filled Polyester
HTST: Natural LCP

Insulation Resistance:
5000 MΩ min

Terminal Material:

Phosphor Bronze
Plating: Au or Sn over 50 μ" (1.27 μm) Ni

Current Rating (IDSD/TST):

3.4 A per pin
(2 pins powered)

Operating Temp Range:

-55 °C to +125 °C with Gold
-55 °C to +105 °C with Tin

Flammability Rating: UL 94V-0

Voltage Rating:

425 VAC/600 VDC

RoHS Compliant: Yes

PROCESSING

Lead-Free Solderable:

HTST: Yes
TST, ZST: Leaded Wave Only
SMT Lead Coplanarity:
(0.10 mm) .004" max (05-15)
(0.15 mm) .006" max (17-36)*
*(.004" stencil solution may be available; contact IPG@samtec.com)

RECOGNITIONS

For complete scope of recognitions see
www.samtec.com/quality



OTHER SOLUTIONS

- Shrouded board-to-board headers and stackers to mate with SSW, SSQ, ESW, ESQ, SSM and BCS Series. See TSS, HTSS and ZSS Series.

ALSO AVAILABLE (MOQ Required)

- Other platings & sizes
- Alignment Pins
- Single Row
- Locking Leads
- Polarized

Note:
Some lengths, styles and options are non-standard, non-returnable. ZST is non-standard, non-returnable.

| TYPE STRIP | 1 | NO. PINS PER ROW | LEAD STYLE | PLATING OPTION | ROW OPTION | OTHER OPTION |
|----------------------|---|--|--------------------------------|---|---|---|
| TST = Cable Strip | | 05, 07, 08, 10, 12, 13, 15, 17, 20, 25, 32, 36 (Standard sizes) | Specify LEAD STYLE from chart. | -F = Gold flash on post, Matte Tin on tail (Not available on -DV) -L = 10 μ" (0.25 μm) Gold on post, Matte Tin on tail -T = Matte Tin | -D = Double Row Through-hole (lead style -01, -02 & -03 only) -DV = Double Row Surface Mount (lead style -01 only) (HTST only) | Surface Mount (lead style -01 only) (HTST only) -P = Pick & Place Pad -TR = Tape & Reel Packaging -FR = Full Reel Tape & Reel (must order max. quantity per reel; contact Samtec for quantity breaks) |

| LEAD STYLE | T/H (A) |
|------------|--------------|
| -01 | (2.92) .115 |
| -02 | (4.19) .165 |
| -03 | (14.35) .565 |

| LEAD STYLE | RIGHT-ANGLE (B) |
|------------|-----------------|
| -04 | (3.30) .130 |
| -05 | (5.84) .230 |

| ZST | 1 | NO. PINS PER ROW | LEAD STYLE | PLATING OPTION | D | BODY HEIGHT |
|-----|---|--|--------------------------------|---|---|---------------------------|
| | | 05, 07, 08, 10, 12, 13, 15, 17, 20, 25, 32, 36 (Standard sizes) | Specify LEAD STYLE from chart. | -F = Gold flash on post, Matte Tin on tail -L = 10 μ" (0.25 μm) Gold on post, Matte Tin on tail -T = Matte Tin | | - "XXXX" = Body Height |

| LEAD STYLE | C (OAL) | MAX BODY HEIGHT |
|------------|---------------|-----------------|
| -01 | (16.00) .630 | (13.72) .540 |
| -02 | (18.54) .730 | (16.26) .640 |
| -03 | (21.08) .830 | (18.80) .740 |
| -04 | (23.62) .930 | (21.34) .840 |
| -05 | (26.16) 1.030 | (23.88) .940 |
| -06 | (28.70) 1.130 | (26.42) 1.040 |
| -07 | (31.24) 1.230 | (28.96) 1.140 |
| -08 | (33.78) 1.330 | (31.50) 1.240 |
| -09 | (36.32) 1.430 | (34.04) 1.340 |

Note: For added mechanical stability, Samtec recommends mechanical board spacers be used in applications with gold or selective gold plated connectors. Contact ipg@samtec.com for more information.

Due to technical progress, all designs, specifications and components are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Samtec manufacturer](#):

Other Similar products are found below :

[ESQT-135-03-F-D-380](#) [QTE-060-01-L-D-A](#) [MSAS-179-ZUGG-18](#) [MTSW-103-07-F-S-240](#) [BCS-116-L-S-TE](#) [ERF8-020-05.0-S-DV-K-TR](#)
[ERF8-060-05.0-L-DV-K-TR](#) [IDMD-10-T-12.00-A-G-R](#) [SFML-115-01-S-D](#) [SFML-125-01-S-D](#) [LSHM-120-02.5-L-DV-A-N-K-TR](#) [ESQ-110-14-G-D](#) [ESQT-125-03-F-D-310](#) [SO-0515-01-01-02](#) [FJH-50-D-12.00-4](#) [CES-150-01-T-D](#) [QTE-040-04-L-D-A](#) [QTH-020-04-F-D-DP-A-K-TR](#)
[QTH-060-01-F-D-A](#) [QTH-090-04-L-D-A](#) [TCSD-10-S-05.00-01-F-N](#) [TCSD-15-D-02.00-01-N](#) [TFM-115-02-L-DH](#) [TFM-120-12-S-D-LC](#)
[TFML-140-02-S-D](#) [TLW-107-05-G-D](#) [BDL-136-T-E](#) [TSS-132-01-G-S](#) [TST-113-04-S-D-RA](#) [TSW-105-14-F-D](#) [MMS-110-01-H-DH](#) [HPF-03-02-T-S](#) [DW-25-11-L-D-450](#) [ERF8-020-01-L-D-RA-L-TR](#) [ERF8-040-05.0-L-DV-TR](#) [SL-120-T-10](#) [SLM-115-01-S-D](#) [CLP-132-02-G-D](#)
[TFC-125-02-F-D-A-K](#) [TSW-202-07-T-S](#) [ISDF-25-D-M](#) [IPT1-105-01-S-D-RA](#) [IPL1-125-01-S-D-RA](#) [ICO-422-L-GT](#) [HTSW-116-15-L-S-LL](#)
[HTSW-103-08-L-S-RA](#) [ESQ-116-33-T-T](#) [ERM8-020-02.0-S-DV-TR](#) [TCSD-10-D-06.00-01-N](#) [TCSD-20-D-12.00-01-N](#)