


# MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



## RB High Temperature, For 125°C Use Series

**S**  
Solvent Proof  
WV ≤ 100V




- Load life of 2000 hours at 125°C
- For Electronic Control unit and other high temperature applications
- Complied to the RoHS directive

Item	Characteristics																	
Operating temperature range	WV ≤ 50: -55 ~ +125°C, WV ≥ 63: -40 ~ +125°C																	
Leakage current max.	WV ≤ 50: I = 0.01CV or 3µA whichever is greater (after 2 minutes) WV ≥ 63: 0.03CV + 10µA (after 5 minutes)																	
Capacitance tolerance	±20% at 120Hz, 20°C																	
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000µF : tanδ increases by 0.02 for each 1000µF from below value.																	
	<table border="1"> <tr> <td>Rated Voltage(V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63 ~ 100</td> <td>160 ~ 250</td> </tr> <tr> <td>tanδ</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.15</td> </tr> </table>	Rated Voltage(V)	6.3	10	16	25	35	50	63 ~ 100	160 ~ 250	tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.08
Rated Voltage(V)	6.3	10	16	25	35	50	63 ~ 100	160 ~ 250										
tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.08	0.15										
Low temperature characteristics (Impedance ratio at 120Hz)	<table border="1"> <tr> <td>WV</td> <td>6.3 ~ 10</td> <td>16 ~ 250</td> </tr> <tr> <td>Z-25°C/Z+20°C</td> <td>3</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>5</td> <td>4</td> </tr> </table>	WV	6.3 ~ 10	16 ~ 250	Z-25°C/Z+20°C	3	2	Z-40°C/Z+20°C	5	4								
	WV	6.3 ~ 10	16 ~ 250															
	Z-25°C/Z+20°C	3	2															
Z-40°C/Z+20°C	5	4																
Load life (after application of the rated voltage for 2000 hours at 125°C)	<table border="1"> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> <tr> <td>Capacitance change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>tanδ</td> <td>Less than 300% of specified value</td> </tr> </table> <p>∅5, 6.3 and WV ≥ 100 products are for 1000 hours</p>	Leakage current	Less than specified value	Capacitance change	Within ±20% of initial value	tanδ	Less than 300% of specified value											
Leakage current	Less than specified value																	
Capacitance change	Within ±20% of initial value																	
tanδ	Less than 300% of specified value																	
Shelf life (at 125°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4																	

### ● DRAWING

Unit : mm

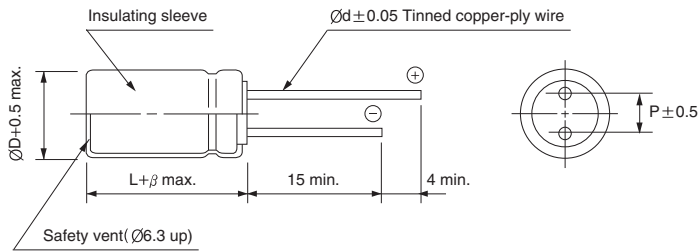

∅D	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
∅d	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β	1.5			2.0			

### ● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

WV	µF	Frequency					
		60Hz	120Hz	1kHz	10kHz	50kHz	100kHz ≤
6.3~100	~ 47	0.38	0.50	0.78	1.00	1.00	1.00
	68 ~ 680	0.46	0.57	0.77	0.86	0.93	1.00
	1000 ~	0.57	0.67	0.77	0.77	0.88	1.00
160~250	0.47 ~ 220	0.44	0.56	0.78	0.89	0.94	1.00
	330 ~	0.60	0.67	0.75	0.77	0.88	1.00

MINIATURE TYPES

## MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

### RB series

#### ● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item $\mu$ F	6.3		10		16	
	$\varnothing$ D×L (mm)	Ripple current (mA rms) 125°C 100kHz	$\varnothing$ D×L (mm)	Ripple current (mA rms) 125°C 100kHz	$\varnothing$ D×L (mm)	Ripple current (mA rms) 125°C 100kHz
47					5×11	165
68			5×11	165	6.3×11	230
100	5×11	160	6.3×11	220	6.3×11	280
150	6.3×11	240	6.3×11	280	8×11.5	410
220	6.3×11	300	8×11.5	410	8×11.5	485
330	8×11.5	310	8×11.5	485	10×12.5	660
470	10×12.5	605	10×12.5	635	10×16	815
680	10×16	740	10×16	815	10×20	1075
1000	10×20	1005	10×20	1120	12.5×20	1490
1500	10×25	1290	12.5×20	1495	12.5×25	1755
2200	12.5×20	1520	12.5×25	1805	16×20	1900
3300	12.5×25	1805	16×20	1955	16×25	2210
4700	16×25	2045	16×31.5	2555	16×35.5	2830
6800	16×31.5	2505	16×35.5	2830	18×35.5	3060
10000	16×40	2905	18×40	3210		
15000	18×40	3125				

WV Item $\mu$ F	25		35		50	
	$\varnothing$ D×L (mm)	Ripple current (mA rms) 125°C 100kHz	$\varnothing$ D×L (mm)	Ripple current (mA rms) 125°C 100kHz	$\varnothing$ D×L (mm)	Ripple current (mA rms) 125°C 100kHz
1.0					5×11	40
1.5					5×11	50
2.2					5×11	55
3.3					5×11	70
4.7					5×11	85
6.8					5×11	95
10					5×11	120
15					5×11	155
22			5×11	170	6.3×11	205
33	5×11	165	6.3×11	240	6.3×11	255
47	6.3×11	220	6.3×11	285	8×11.5	365
68	6.3×11	275	8×11.5	405	8×11.5	435
100	8×11.5	405	8×11.5	485	10×16	615
150	8×11.5	485	10×12.5	660	10×20	865
220	10×12.5	635	10×16	815	10×25	1100
330	10×16	790	10×20	1120	12.5×20	1330
470	10×20	1075	12.5×20	1480	12.5×25	1585
680	12.5×20	1470	12.5×25	1755	16×20	1720
1000	12.5×25	1755	16×20	1870	16×31.5	2240
1500	16×20	1870	16×31.5	2520	16×40	2545
2200	16×25	2165	16×35.5	2830	18×40	2705
3300	16×35.5	2830	18×40	3210		
4700	18×40	3125				



# MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

## RB series

### ● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	63		100		160	
	∅D×L (mm)	Ripple current (mA rms) 125°C 100kHz	∅D×L (mm)	Ripple current (mA rms) 125°C 100kHz	∅D×L (mm)	Ripple current (mA rms) 125°C 100kHz
1.0			8×11.5	25	10×12.5	20
2.2			8×12.5	45	10×16	32
3.3			10×16	60	10×16	42
4.7			10×16	70	10×20	50
10	8×11.5	80	10×20	110	12.5×20	85
22	10×16	150	12.5×25	205	16×25	155
33	10×20	200	16×25	280	16×31.5	210
47	12.5×20	280	16×31.5	370		
100	12.5×25	445				

WV Item μF	200		250	
	∅D×L (mm)	Ripple current (mA rms) 125°C 100kHz	∅D×L (mm)	Ripple current (mA rms) 125°C 100kHz
1.0	10×12.5	20	10×12.5	18
2.2	10×16	32	10×16	32
3.3	10×20	42	10×20	42
4.7	10×20	50	12.5×20	60
10	12.5×20	95	16×25	105
22	16×31.5	170		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:*

*Click to view products by [Samwha](#) manufacturer:*

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [1814181](#) [NCD681K10KVY5PF](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESRL25V330](#) [ESX472M16B](#) [SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [477CKR100M](#) [KME25VB100M-6.3X11](#) [XRL50V22](#) [052687X](#) [107CKR010M](#) [EKMA500ELL4R7ME07D](#) [NRE-S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [MAL214658821E3](#) [SK107M025AE3EAKPLP](#) [B43827A1106M8](#) [B41022A5686M6](#) [EKMA160EC3101MF07D](#) [ESMG160ETD221MF11D](#) [EKZH160ETD152MJ20S](#) [RBD-25V100KE3#N](#) [EKMA350ELL100ME07D](#) [ESMG160ETD101ME11D](#) [EGXF500ELL561ML15S](#) [B41896C5278M](#) [B41851A8107M000](#) [EKMA160ETD470MF07D](#) [UHW1J102MHD6510D476M035CC3DE3](#) [63ZLH560MEFCG412.5X30](#) [B41888C5477M000](#) [RD2E476M12025BB](#) [KF101M40018x30A](#) [JRG1E222M05001300350000B](#)