


SC Chip type, Standard Series


- Chip type higher capacitance in larger case size
- Designed for surface mounting on high density PC board
- Applicable to automatic insertion machine using carrier tape
- Complied to the RoHS directive

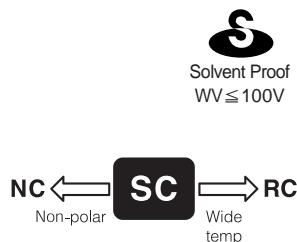

Item	Characteristics																										
Operating temperature range	-40 ~ +85°C																										
Leakage current max.	WV ≤ 100 I = 0.01CV or 3μA whichever is greater (after 2 minutes) WV ≥ 160 I = 0.04CV + 100μA(after 1 minutes)																										
Capacitance tolerance	±20% at 120Hz, 20°C																										
Dissipation factor max. (at 120Hz, 20°C)	WV	4	6.3	10	16	25	35	50	63	100	160	200	250	400	450												
	tanδ	0.35 (0.40)	0.28 (0.35)	0.20 (0.24)	0.16 (0.20)	0.13 (0.16)	0.12 (0.15)	0.09 (0.12)	0.12	0.12	0.20	0.20	0.20	0.25	0.25												
	Figures in () are for small size, over the 6.3 × 5.8(ϕ D × L)																										
Low temperature characteristics (Impedance ratio at 120Hz)	WV	4	6.3	10	16	25	35 ~ 100	160 ~ 250	400 ~ 450																		
	Z-25°C/Z+20°C	6	5	4	3	2	2	3	6																		
	Z-40°C/Z+20°C	12	10	8	6	4	3	6	10																		
Load life (after application of the rated voltage for 2000 hours at 85°C)	Leakage current	Less than specified value																									
	Capacitance change	Within ±20% of initial value (Small size : ±25%)																									
	tanδ	Less than 200% of specified value																									
Shelf life(at 85°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value.																										
Resistance to soldering heat	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 30 seconds.																										
	Leakage current	Less than specified value																									
	Capacitance change	Within ±10% of initial value																									
	tanδ	Less than specified value																									

DRAWING

Unit : mm

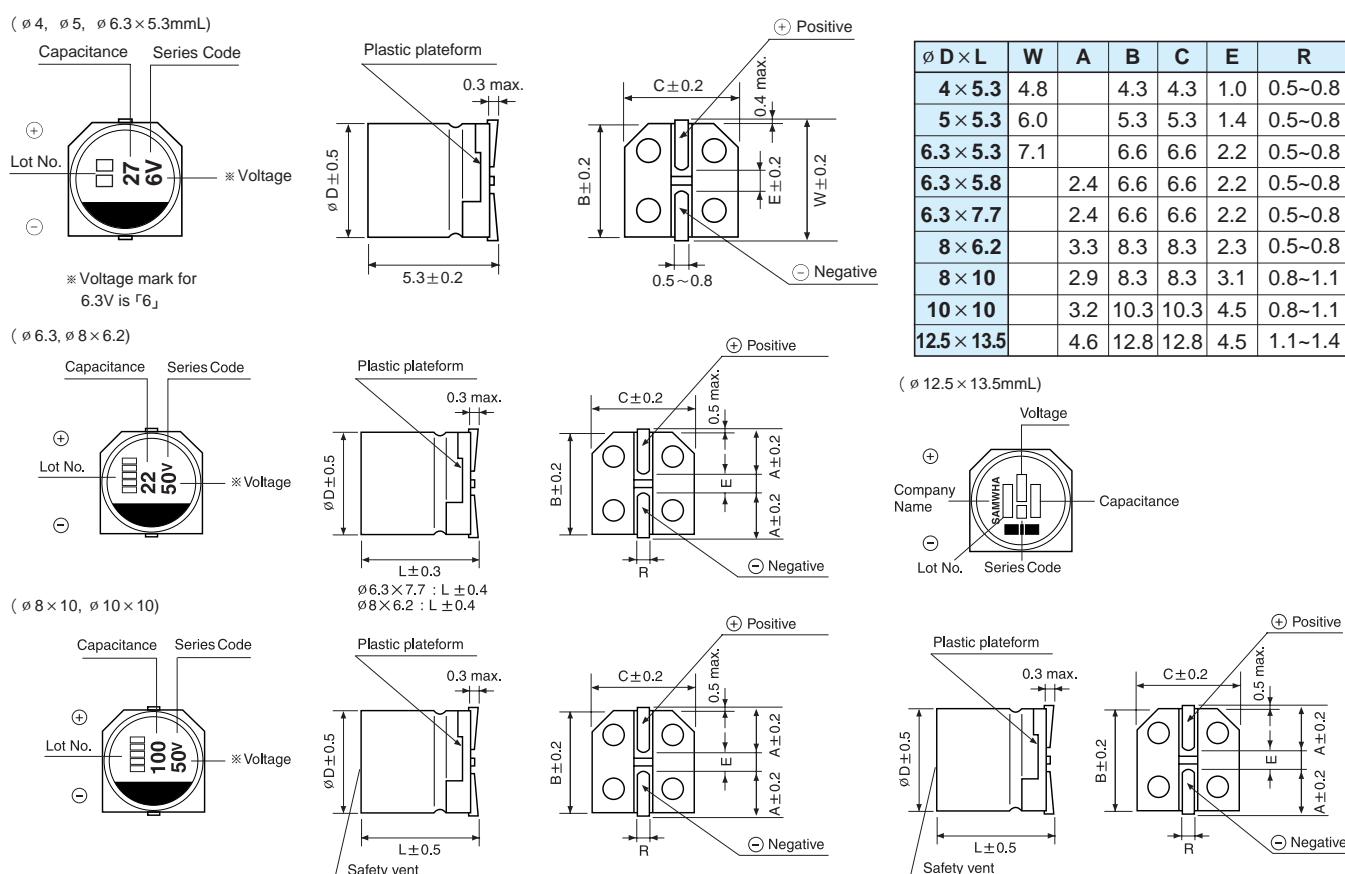

SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS

SC series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	4	6.3	10	16	25	35	50
0.1								3×5.3 2.4
0.22								4×5.3 3.2
0.33								3×5.3 3.5
0.47								4×5.3 4.7
1.0								3×5.3 5.2
2.2								4×5.3 6.8
3.3						3×5.3 12	4×5.3 16	4×5.3 18
4.7					3×5.3 13	4×5.3 18	4×5.3 19	4×5.3 24
					4×5.3 16			5×5.3 25
10		3×5.3 13	3×5.3 16	4×5.3 21	4×5.3 21	4×5.3 24	4×5.3 27	5×5.3 41
		4×5.3 16	4×5.3 19			5×5.3 30	5×5.3 32	6.3×5.3 43
22		3×5.3 19	4×5.3 29	4×5.3 28	4×5.3 30	5×5.3 41	6.3×5.3 55	6.3×5.3 71
		4×5.3 24		5×5.3 36	5×5.3 41	6.3×5.3 53		6.3×5.8 73
33		4×5.3 29	4×5.3 30	4×5.3 34	5×5.3 43	5×5.3 50	6.3×5.3 65	6.3×7.7 94
			5×5.3 41	5×5.3 44	6.3×5.3 58	6.3×5.3 64	6.3×5.8 67	8×6.2 95
47		4×5.3 35	4×5.3 36	5×5.3 47	5×5.3 52	6.3×5.3 70	6.3×7.7 94	6.3×7.7 105
			5×5.3 48	6.3×5.3 62	6.3×5.3 69	6.3×5.8 72	8×6.2 105	8×10 140
100		5×5.3 54	5×5.3 60	6.3×5.3 80	6.3×5.3 88	8×6.2 145	6.3×7.7 132	8×10 181
		6.3×5.3 68	6.3×5.3 82	6.3×5.8 82	6.3×5.8 91		8×10 175	10×10 195
220		6.3×5.3 93	6.3×5.8 91	6.3×7.7 173	6.3×7.7 162	8×10 232	10×10 265	10×10 320
				8×6.2 175	8×10 215	10×10 250		
330			6.3×7.7 188	8×10 240	8×10 270	10×10 305	10×10 360	12.5×13.5 600
			8×6.2 190					
470			8×10 265	8×10 290	8×10 307	10×10 400	12.5×13.5 600	
					10×10 330			
1000			8×10 370	10×10 454	12.5×13.5 710	12.5×13.5 820		
			10×10 400					
1500				10×10 480	12.5×13.5 850			
2200			12.5×13.5 890	12.5×13.5 960				

μF	WV	63	100	160	200	250	400	450
2.2								10×10 85
3.3			6.3×5.8 29				10×10 90	10×10 100
4.7	6.3 × 5.8	31	6.3×5.8 35		10×10 100	10×10 100	12.5×13.5 115	12.5×13.5 115
10		8×5.8 46	8×10 77	10×10 100	12.5×13.5 150	12.5×13.5 150		
22		8×6.2 96	8×10 100	12.5×13.5 240	12.5×13.5 260			
33		8×10 117	10×10 130	12.5×13.5 260		Ripple current (mA rms) at 85°C, 120Hz		
47		10×10 140	10×10 155			Case size $\phi D \times L$ (mm)		
68		10×10 160	12.5×13.5 350					
100		12.5×13.5 370						

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - SMD category:

Click to view products by Samwha manufacturer:

Other Similar products are found below :

[GA0402A270FXBAC31G](#) [RVB-50V330MG10UQ-R](#) [RVJ-50V101MH10U-R](#) [RVZ-35V151MH10U-R2](#) [RC0J226M04005VR](#)
[RC0J476M05005VR](#) [RC1A227M08010VR](#) [RC1C226M05005VR](#) [RC1C476M6L005VR](#) [RC1E107M6L07KVR](#) [RC1E336M6L005VR](#)
[RC1H106M6L005VR](#) [RC1H475M05005VR](#) [RC1V227M10010VR](#) [RC1V476M6L006VR](#) [50SEV1M4X5.5](#) [TYEH1A336E55MTR](#)
[TYEH1H106F55MTR](#) [TYEH1V106E55MTR](#) [35SEV47M6.3X8](#) [35SGV220M10X10.5](#) [VES2R2M1HTR-0405](#) [VZH102M1ATR-1010](#)
[50SEV10M6.3X5.5](#) [50SGV1M4X6.1](#) [SC1C476M05005VR](#) [SC1E107M0806BVR](#) [SC1E227M08010VR](#) [SC1H106M05005VR](#)
[SC1H106M6L005VR](#) [SC1H227M10010VR](#) [SC1H335M04005VR](#) [CE4.7/50-SMD](#) [VEJ4R7M1VTR-0406](#) [VZH331M1ETR-0810](#)
[VES101M1CTR-0605](#) [TYEH1H475E55MTR](#) [6.3SEV22M4X5.5](#) [6.3SEV47M4X5.5](#) [EEEFK1H151GP](#) [EEEFK1A681GP](#) [EEE0GA471XP](#)
[EEEFK1V151GP](#) [RC1V107M6L07KVR](#) [VZH101M1VTR-0810](#) [VE010M1HTR-0405](#) [GYA1V151MCQ1GS](#) [EEH-ZC1J680P](#) [EEH-ZK1V181P](#) [GYA1V271MCQ1GS](#)