


### N-channel Enhanced mode TO-220SF/TO-252 MOSFET

#### Features

- High ruggedness
- Low  $R_{DS(ON)}$  (Typ 0.6Ω)@ $V_{GS}=10V$
- Low Gate Charge (Typ 13nC)
- Improved dv/dt Capability
- 100% Avalanche Tested
- Application: LED, Charger, PC Power

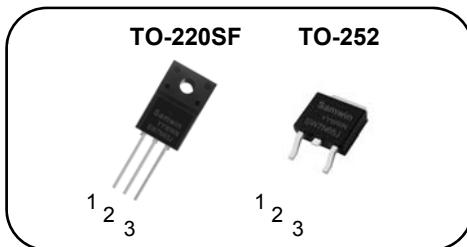

1. Gate 2. Drain 3. Source


#### General Description

This power MOSFET is produced with advanced super junction technology of SAMWIN. This technology enable the power MOSFET to have better characteristics, including fast switching time, low on resistance, low gate charge and especially excellent avalanche characteristics.

$BV_{DSS} : 650V$

$I_D : 7A$

$R_{DS(ON)} : 0.6\Omega$



#### Order Codes

Item	Sales Type	Marking	Package	Packaging
1	SW MN 7N65J	SW7N65J	TO-220SF	TUBE
2	SW D 7N65J	SW7N65J	TO-252	REEL

#### Absolute maximum ratings

Symbol	Parameter	Value		Unit
		TO-220SF	TO-252	
$V_{DSS}$	Drain to source voltage	650		V
$I_D$	Continuous drain current (@ $T_C=25^\circ C$ )	7*		A
	Continuous drain current (@ $T_C=100^\circ C$ )	4.4*		A
$I_{DM}$	Drain current pulsed (note 1)	21		A
$V_{GS}$	Gate to source voltage	$\pm 30$		V
$E_{AS}$	Single pulsed avalanche energy (note 2)	180		mJ
$E_{AR}$	Repetitive avalanche energy (note 1)	18		mJ
dv/dt	MOSFET dv/dt ruggedness (@ $V_{DS}=0\sim 400V$ )	30		V/ns
dv/dt	Peak diode recovery dv/dt (note 3)	20		V/ns
$P_D$	Total power dissipation (@ $T_C=25^\circ C$ )	32.1	113.6	W
	Derating factor above 25°C	0.26	0.9	W/°C
$T_{STG}, T_J$	Operating junction temperature & storage temperature	$-55 \sim + 150$		°C
$T_L$	Maximum lead temperature for soldering purpose, 1/8 from case for 5 seconds.	300		°C

\*. Drain current is limited by junction temperature.

#### Thermal characteristics

Symbol	Parameter	Value		Unit
		TO-220SF	TO-252	
$R_{thjc}$	Thermal resistance, Junction to case	3.9	1.1	°C/W
$R_{thja}$	Thermal resistance, Junction to ambient	46		°C/W

### Electrical characteristic ( $T_J = 25^\circ\text{C}$ unless otherwise specified )

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
<b>Off characteristics</b>						
$\text{BV}_{\text{DSS}}$	Drain to source breakdown voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	650			V
$\Delta \text{BV}_{\text{DSS}} / \Delta T_J$	Breakdown voltage temperature coefficient	$I_{\text{D}}=250\mu\text{A}$ , referenced to $25^\circ\text{C}$		0.81		$^\circ\text{C}$
$I_{\text{DSS}}$	Drain to source leakage current	$V_{\text{DS}}=650\text{V}, V_{\text{GS}}=0\text{V}$			1	$\mu\text{A}$
		$V_{\text{DS}}=520\text{V}, T_J=125^\circ\text{C}$			50	$\mu\text{A}$
$I_{\text{GSS}}$	Gate to source leakage current, forward	$V_{\text{GS}}=30\text{V}, V_{\text{DS}}=0\text{V}$			100	nA
	Gate to source leakage current, reverse	$V_{\text{GS}}=-30\text{V}, V_{\text{DS}}=0\text{V}$			-100	nA
<b>On characteristics</b>						
$V_{\text{GS(TH)}}$	Gate threshold voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	2.5		4.5	V
$R_{\text{DS(ON)}}$	Drain to source on state resistance	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=3.5\text{A}, T_J=25^\circ\text{C}$		0.6	0.66	$\Omega$
		$V_{\text{GS}}=10\text{V}, I_{\text{D}}=3.5\text{A}, T_J=125^\circ\text{C}$		1.4		$\Omega$
$G_{\text{fs}}$	Forward transconductance	$V_{\text{DS}}=30\text{V}, I_{\text{D}}=3.5\text{A}$		6		S
<b>Dynamic characteristics</b>						
$C_{\text{iss}}$	Input capacitance	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=200\text{V}, f=1\text{MHz}$		475		pF
$C_{\text{oss}}$	Output capacitance			15		
$C_{\text{rss}}$	Reverse transfer capacitance			1.1		
$t_{\text{d(on)}}$	Turn on delay time	$V_{\text{DS}}=325\text{V}, I_{\text{D}}=7\text{A}, R_G=10\Omega, V_{\text{GS}}=10\text{V}$ (note 4,5)		14		ns
$t_r$	Rising time			25		
$t_{\text{d(off)}}$	Turn off delay time			37		
$t_f$	Fall time			26		
$Q_g$	Total gate charge	$V_{\text{DS}}=520\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=7\text{A}$ $I_G=3\text{mA}$ (note 4,5)		13		nC
$Q_{\text{gs}}$	Gate-source charge			3		
$Q_{\text{gd}}$	Gate-drain charge			6		
$R_g$	Gate resistance	$V_{\text{DS}}=0\text{V}$ , Scan F mode		30		$\Omega$


### Source to drain diode ratings characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$I_s$	Continuous source current	Integral reverse p-n Junction diode in the MOSFET			7	A
$I_{\text{SM}}$	Pulsed source current				21	A
$V_{\text{SD}}$	Diode forward voltage drop.	$I_s=7\text{A}, V_{\text{GS}}=0\text{V}$			1.4	V
$t_{\text{rr}}$	Reverse recovery time	$I_s=7\text{A}, V_{\text{GS}}=0\text{V}, dI_F/dt=100\text{A}/\mu\text{s}$		253		ns
$Q_{\text{rr}}$	Reverse recovery charge			2.1		$\mu\text{C}$


※. Notes

1. Repetitive rating : pulse width limited by junction temperature.
2.  $L = 40\text{mH}, I_{AS} = 3\text{A}, V_{DD} = 50\text{V}, R_G = 25\Omega$ , Starting  $T_J = 25^\circ\text{C}$
3.  $I_{SD} \leq 7\text{A}$ ,  $dI/dt = 100\text{A}/\mu\text{s}$ ,  $V_{DD} \leq \text{BV}_{\text{DSS}}$ , Starting  $T_J = 25^\circ\text{C}$
4. Pulse Test : Pulse Width  $\leq 300\text{us}$ , duty cycle  $\leq 2\%$ .
5. Essentially independent of operating temperature.


**Fig. 1. On-state characteristics**

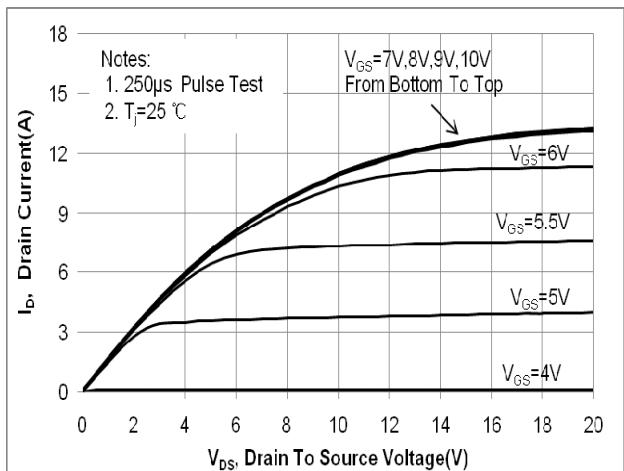


**Fig. 2. Transfer Characteristics**

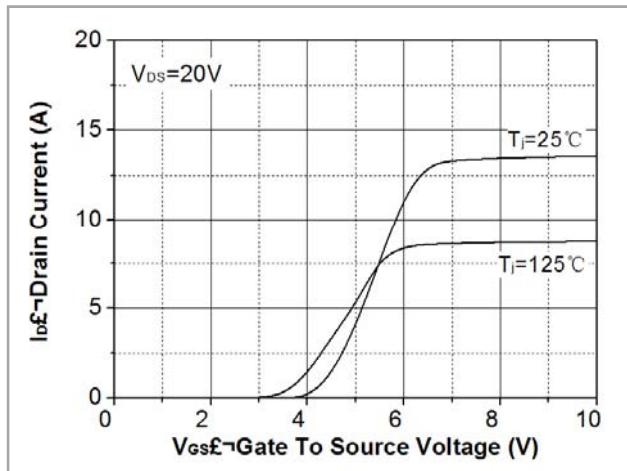


**Fig. 3. On-resistance variation vs. drain current and gate voltage**

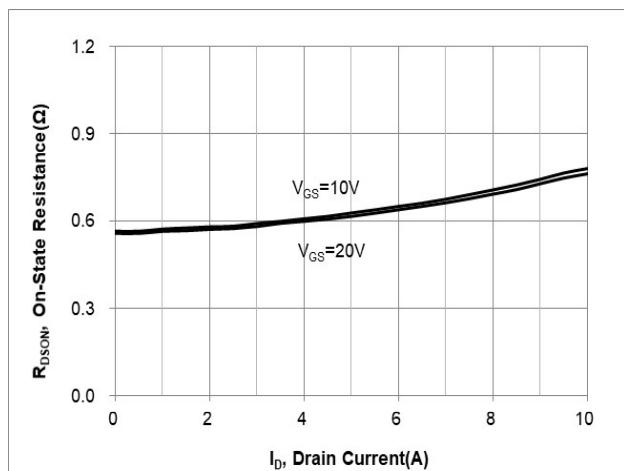

**Fig. 4. On-state current vs. diode forward voltage**

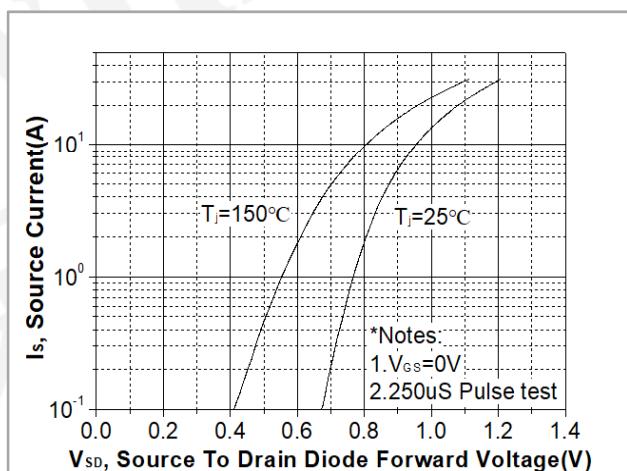

**Fig 5. Breakdown voltage variation vs. junction temperature**

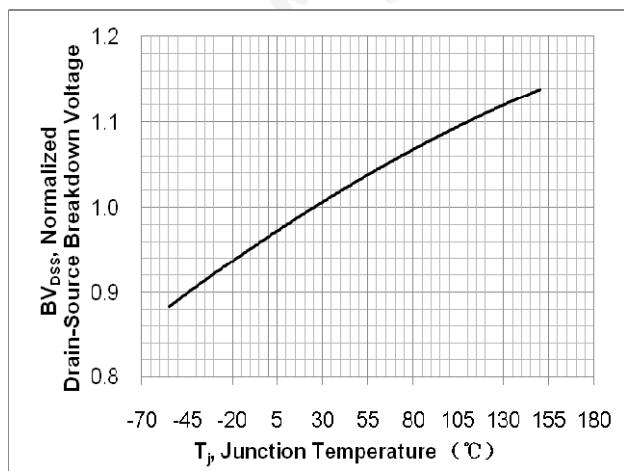

**Fig. 6. On-resistance variation vs. junction temperature**

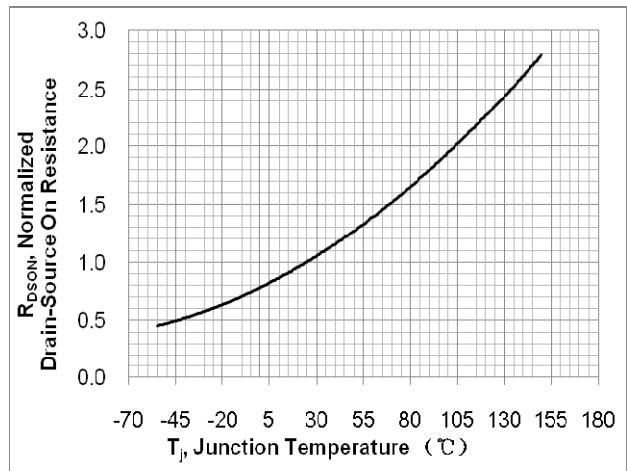


Fig. 7. Gate charge characteristics

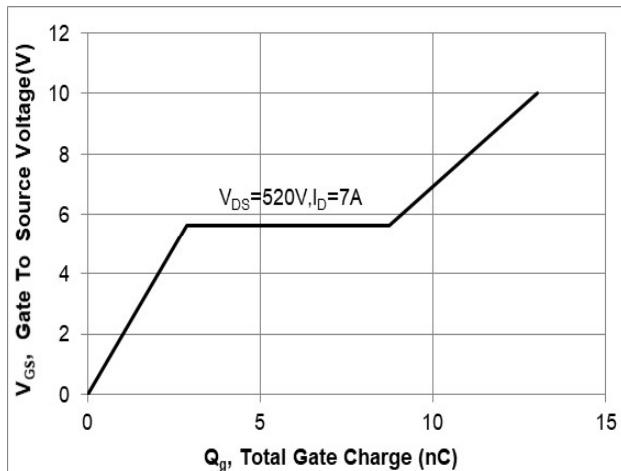


Fig. 8. Capacitance Characteristics

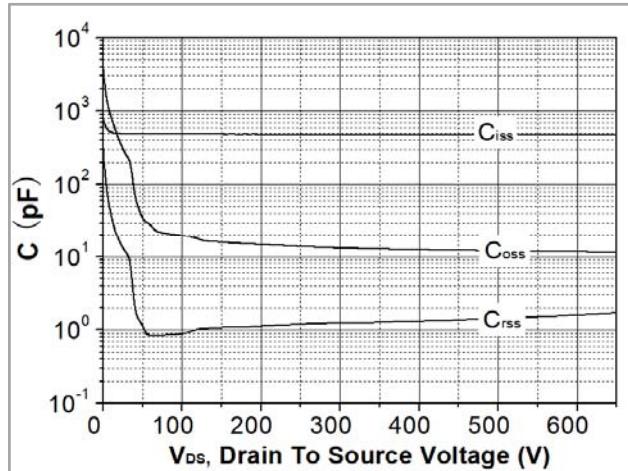


Fig. 9. Maximum safe operating area(TO-220SF)

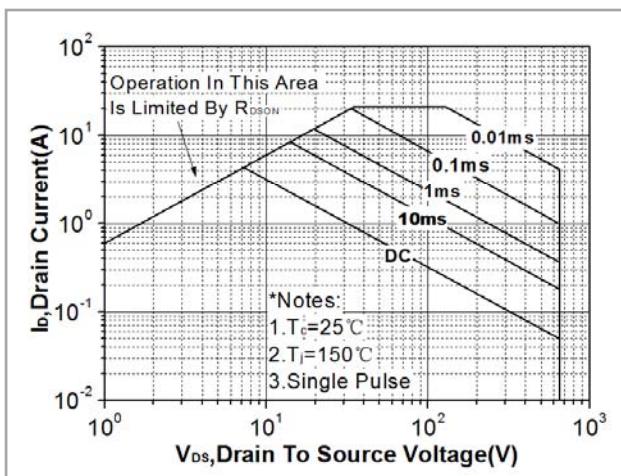


Fig. 10. Maximum safe operating area(TO-252)

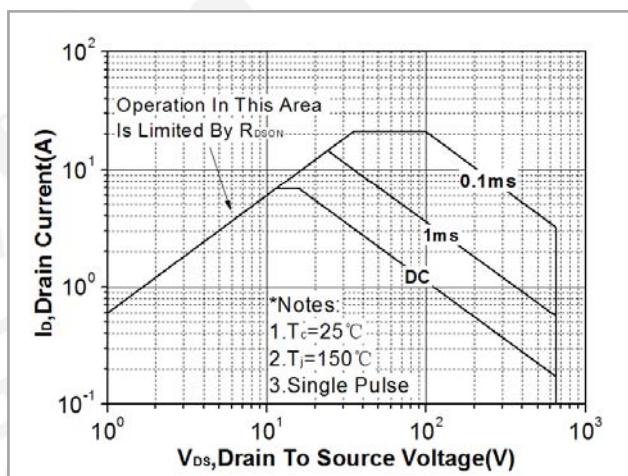


Fig. 11. Transient thermal response curve(TO-220SF)

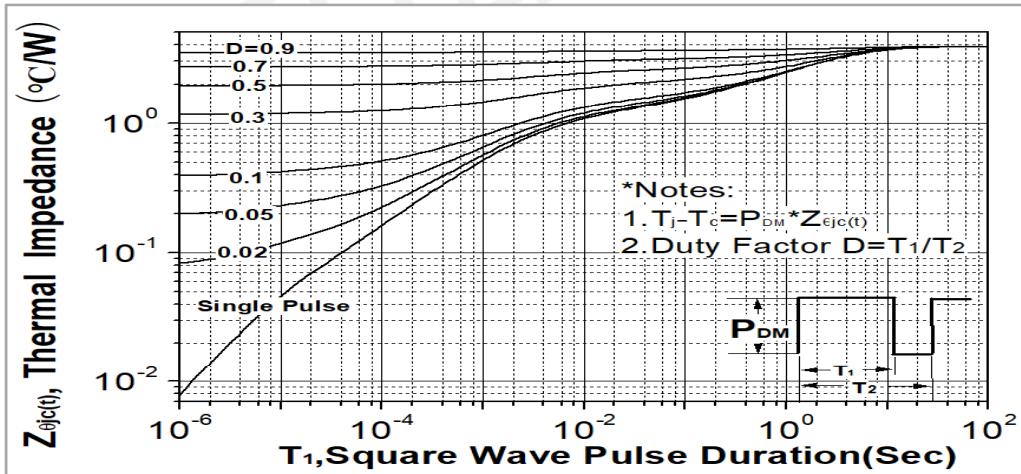


Fig. 12. Transient thermal response curve(TO-252)

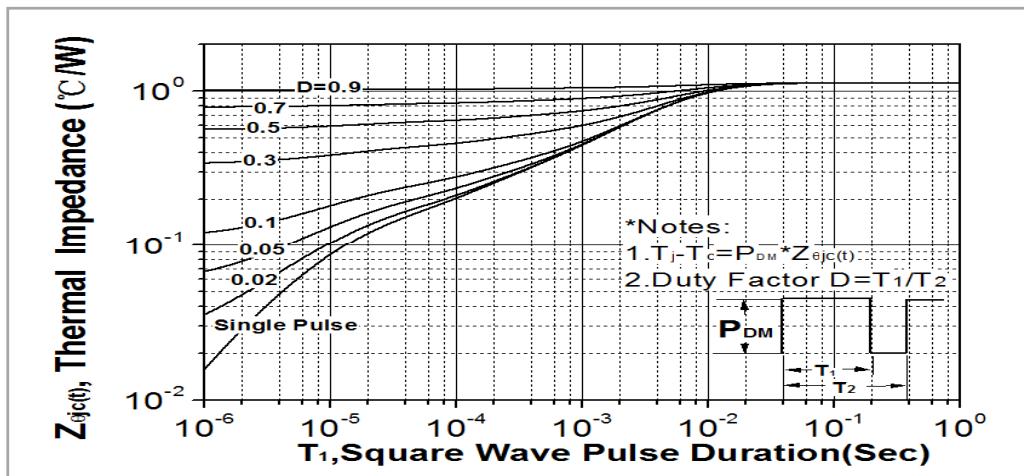


Fig. 13. Gate charge test circuit & waveform

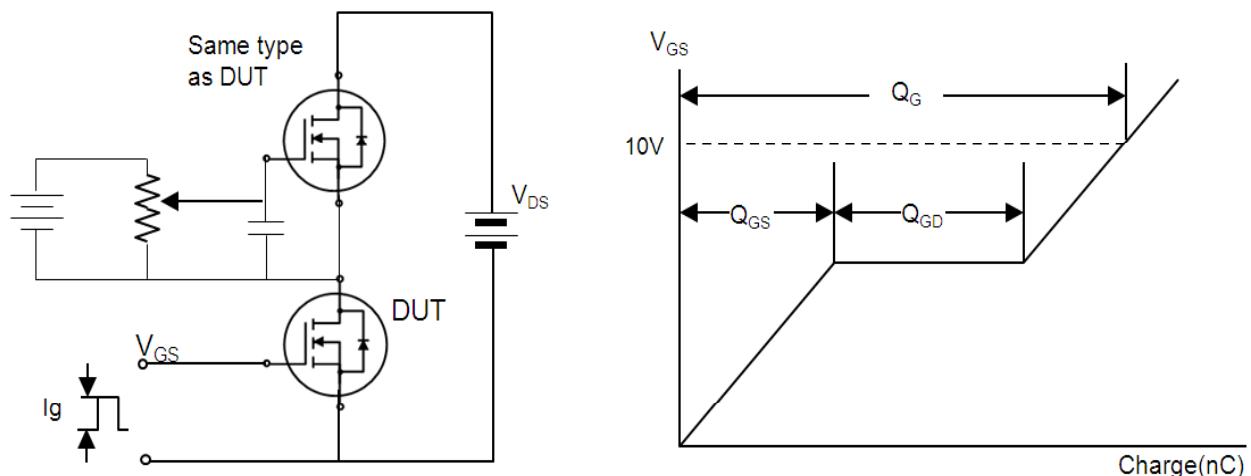


Fig. 14. Switching time test circuit & waveform

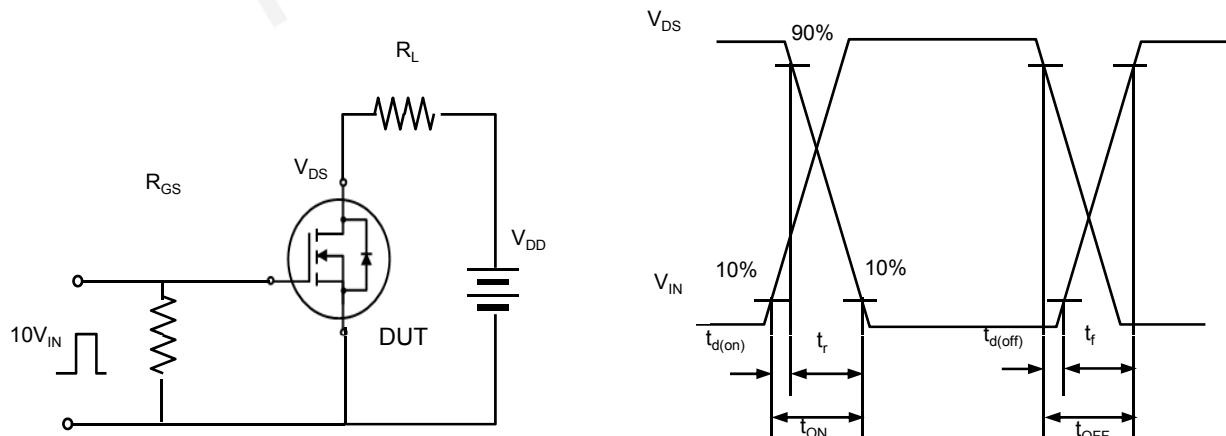


Fig. 15. Unclamped Inductive switching test circuit & waveform


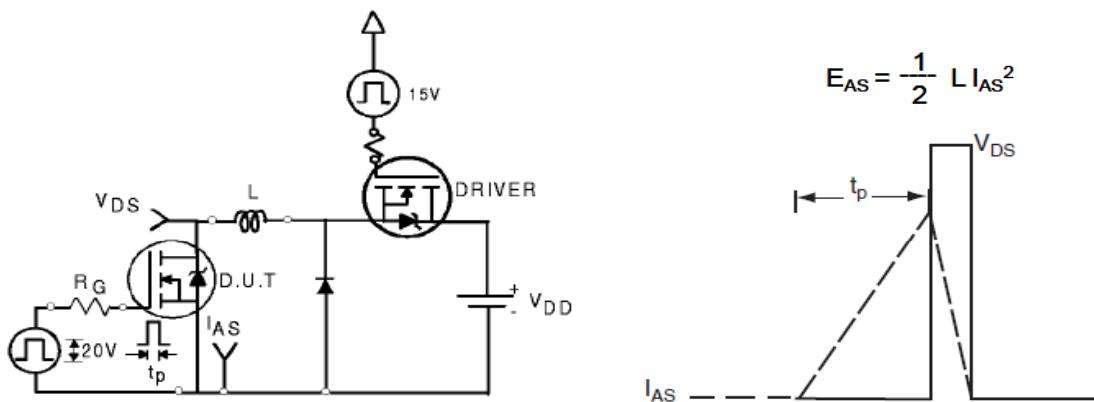


Fig. 16. Peak diode recovery dv/dt test circuit & waveform

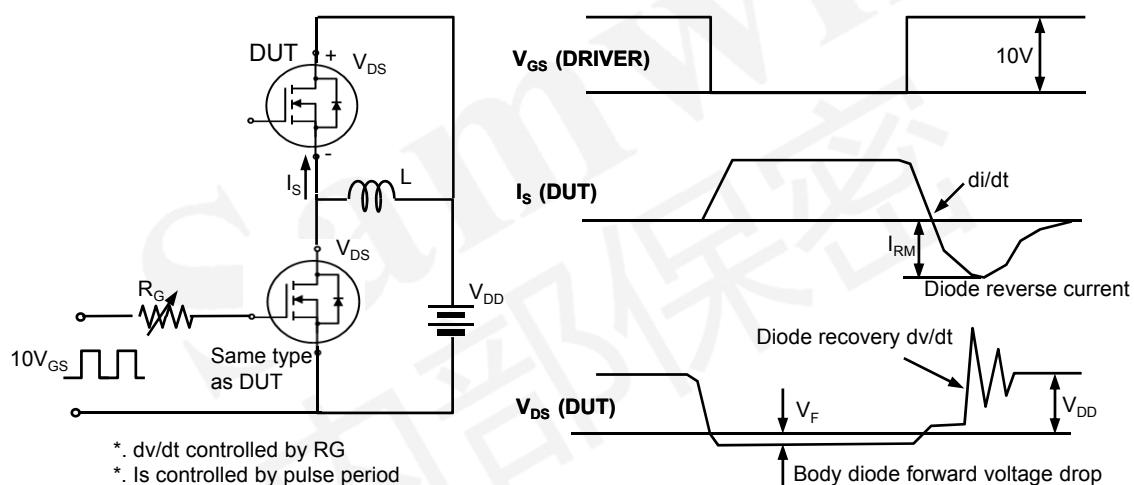

### DISCLAIMER

- \* All the data & curve in this document was tested in XI'AN SEMIPOWER TESTING & APPLICATION CENTER.
- \* This product has passed the PCT, TC, HTRB, HTGB, HAST, PC and Solderdunk reliability testing.
- \* Qualification standards can also be found on the Web site (<http://www.semipower.com.cn>)
- \* Suggestions for improvement are appreciated, Please send your suggestions to [samwin@samwinsemi.com](mailto:samwin@samwinsemi.com)

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for MOSFET category:***

***Click to view products by Sam&wing manufacturer:***

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)  
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)  
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#)  
[US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#)  
[IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)  
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)  
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1\\_T0\\_00201](#) [PJMF380N65E1\\_T0\\_00201](#)  
[PJMF280N60E1\\_T0\\_00201](#) [PJMF600N65E1\\_T0\\_00201](#) [PJMF900N65E1\\_T0\\_00201](#) [PJMF900N60E1\\_T0\\_00201](#)