



RoHS

MESSRS: 上海盈虹电子

APPROVAL NO 697-006

DATE 2016.05.18

ALUMINUM ELECTROLYTIC

CAPACITOR

APPROVAL SHEET

CATALOG TYPE	NHA SERIES
USER PART NO.	
适用机种	
特记事项	Halogen-Free

QINGDAO SAMYOUNG ELECTRONICS CO.,LTD.

MANAGER OF DEVELOPMENT DEPARTMENT

GONG JANG SUG



USER APPROVAL:

APPROVAL NO.:

SamYoung(Korea) : 47,SAGIMAKGOL-RO,JUNGWON-GU,SEONGNAM-SI,GYEONGGI-DO,KOREA

SamYoung(China) : No.5 CHANGJIANG ROAD,PINGDU-CITY,SHANDONG-PROVINCE,CHINA




APPROVAL NO. 697-006	ALUMINUM ELECTROLYTIC CAPACITOR	PAGE: 1 OF 5
		DATE: 2016.05.18


Specifications of NHA Series

Item	Characteristics																																											
Rated Voltage Range	6.3 ~ 100V _{DC}	160 ~ 400V _{DC}	450 ~ 500V _{DC}																																									
Operating Temperature Range	- 55 ~ + 105 °C	- 40 ~ + 105 °C	- 25 ~ + 105 °C																																									
Capacitance Tolerance	±20% <M>		(at 20°C, 120Hz)																																									
Leakage Current (at 20 °C)	After 1 minute:0.03CV(μA) or 4 μA, whichever is greater After 2 minutes:0.01CV(μA) or 3 μA, whichever is greater Where, C = Nominal capacitance(μF) V = Rated Voltage(V _{DC})		<table border="1"> <thead> <tr> <th colspan="2">After 1 minute</th> <th colspan="2">After 5 minutes</th> </tr> <tr> <th>C_RV_R≤1000</th> <th>C_RV_R>1000</th> <th>C_RV_R≤1000</th> <th>C_RV_R>1000</th> </tr> </thead> <tbody> <tr> <td>0.1C_RV_R+40</td> <td>0.04C_RV_R+100</td> <td>0.03C_RV_R+15</td> <td>0.02C_RV_R+25</td> </tr> </tbody> </table>	After 1 minute		After 5 minutes		C _R V _R ≤1000	C _R V _R >1000	C _R V _R ≤1000	C _R V _R >1000	0.1C _R V _R +40	0.04C _R V _R +100	0.03C _R V _R +15	0.02C _R V _R +25																													
	After 1 minute		After 5 minutes																																									
C _R V _R ≤1000	C _R V _R >1000	C _R V _R ≤1000	C _R V _R >1000																																									
0.1C _R V _R +40	0.04C _R V _R +100	0.03C _R V _R +15	0.02C _R V _R +25																																									
Dissipation Factor (TANδ) (20°C, 120Hz)	<table border="1"> <thead> <tr> <th>Rated Voltage(Vdc)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160~250</th> <th>350~500</th> </tr> </thead> <tbody> <tr> <td>TANδ (Max)</td> <td>0.34</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.20</td> <td>0.24</td> </tr> </tbody> </table> <p>When the capacitance exceeds 1000μF, 0.02 shall be added every 1000μF increase.</p>											Rated Voltage(Vdc)	6.3	10	16	25	35	50	63	100	160~250	350~500	TANδ (Max)	0.34	0.24	0.20	0.16	0.14	0.12	0.10	0.09	0.20	0.24											
Rated Voltage(Vdc)	6.3	10	16	25	35	50	63	100	160~250	350~500																																		
TANδ (Max)	0.34	0.24	0.20	0.16	0.14	0.12	0.10	0.09	0.20	0.24																																		
Temperature Characteristics (Impedance ratio at 120Hz)	<table border="1"> <thead> <tr> <th>Rated Voltage(VDC)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63~100</th> <th>160</th> <th>200~400</th> <th>450~500</th> </tr> </thead> <tbody> <tr> <td>Z (-25°C) / Z (20°C)</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>3</td> <td>6</td> <td>6</td> </tr> <tr> <td>Z (-40°C) / Z (20°C)</td> <td>12</td> <td>10</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>4</td> <td>5</td> <td>6</td> <td>-</td> </tr> </tbody> </table>											Rated Voltage(VDC)	6.3	10	16	25	35	50	63~100	160	200~400	450~500	Z (-25°C) / Z (20°C)	5	4	3	2	2	2	3	3	6	6	Z (-40°C) / Z (20°C)	12	10	8	5	4	3	4	5	6	-
	Rated Voltage(VDC)	6.3	10	16	25	35	50	63~100	160	200~400	450~500																																	
	Z (-25°C) / Z (20°C)	5	4	3	2	2	2	3	3	6	6																																	
Z (-40°C) / Z (20°C)	12	10	8	5	4	3	4	5	6	-																																		
Load Life	<p>The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 105°C.(where, 1000 hours ≤8Φ)</p> <p>Capacitance change: ≤±20% of the initial value Tanδ ≤200% of the initial specified value LC ≤The initial specified value</p>																																											
Shelf Life	<p>The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. (where , 500 hours ≤8Φ)</p> <p>The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.</p> <p>Capacitance change: ≤±20% of the initial value Tanδ ≤200% of the initial specified value LC ≤The initial specified value (Where, 200% for ≥ WV 160Vdc)</p>																																											
Others	Satisfied characteristics KS C IEC 60384-4																																											


A. DIMENSIONS OF NHA Series

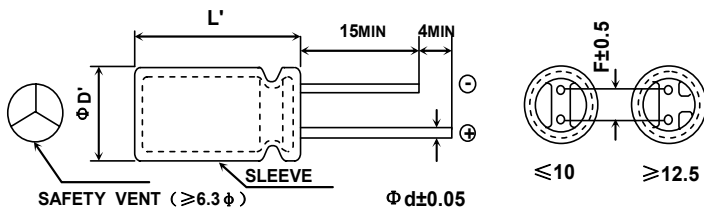

B. MARKING: BROWN SLEEVE, WHITE INK

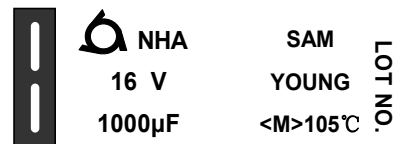

FRONT VIEW OF CAPACITOR BACK VIEW OF CAPACITOR

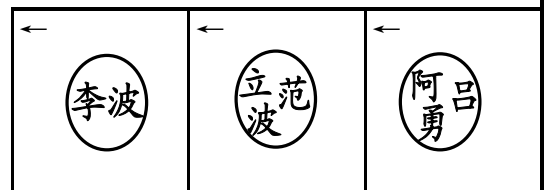

ALUMINUM ELECTROLYTIC CAPACITOR

APPROVAL NO.
697-006

RATINGS OF NHA SERIES


CAP	WV	RATINGS OF NHA SERIES																
		6.3	10	16	25	35	50	63	80	100	160	200	250	350	400	420	450	500
0.1							5X11 2.1	5X11 3.2		5X11 3.6								
0.22							5X11 3.2	5X11 4.3		5X11 4.8								
0.33							5X11 6.3	5X11 7.2		5X11 7.8								
0.47							5X11 10	5X11 11		5X11 12	6.3X11 12	6.3X11 12	6.3X11 12	6.3X11 12				
0.68							5X11 12	5X11 13		5X11 14	6.3X11 14	6.3X11 15	6.3X11 15	6.3X11 15				
1							5X11 13	5X11 15		5X11 16	6.3X11 14	6.3X11 15	6.3X11 17	6.3X11 18	6.3X11 19		6.3X11 14	6.3X11 13
2.2							5X11 18	5X11 19		5X11 21	6.3X11 20	6.3X11 24	6.3X11 27	6.3X11 29	6.3X11 28		6.3X15 16	8X11.5 22
3.3							5X11 30	5X11 33		5X11 34	6.3X11 35	6.3X11 36	6.3X11 37	8X11.5 38	10X12.5 41		10X12.5 25	10X16 42
4.7					5X11 25	5X11 27	5X11 37	5X11 39		5X11 40	6.3X11 41	6.3X11 43	8X11.5 45	8X11.5 45	10X12.5 48		10X12.5 35	10X16 40
6.8					5X11 31	5X11 33	5X11 44	5X11 48		5X11 49	8X11.5 52	8X11.5 54	8X11.5 56	10X16 62	10X12.5 78		10X16 55	10X20 55
10				5X11 35	5X11 40	5X11 40	5X11 54	5X11 59		5X11 59	8X11.5 60	8X11.5 62	10X16 74	10X20 79	10X16 86		10X20 76	12.5X20 80
15																	12.5X20 85	12.5X20 72
18											8X11.5 60							
22		5X11 48	5X11 53	5X11 56	5X11 67	5X11 79	5X11 87	6.3X11 87		6.3X11 100	10X16 111	10X16 113	10X20 127	12.5X16 138	10X25 157		12.5X25 136	16X25 132
33																		
47		5X11 52	5X11 56	5X11 60	5X11 75	5X11 80	5X11 97	6.3X11 122		8X11.5 144	10X20 156	10X20 158	12.5X20 184	12.5X25 189	16X20 210		12.5X30 223	16X31.5 178
56										8X11.5 171								
68																		
82		5X11 69	5X11 83	5X11 92	5X11 113	6.3X11 138	6.3X11 156	8X11.5 207		10X16 264	12.5X20 274	12.5X25 288	16X20 300	16X31.5 348	18X20 300		18X35.5 349	
100																		
120																		
150																		
180																		
220		5X11 153	5X11 170	6.3X11 213	6.3X11 238	8X11.5 294	10X12.5 395	10X16 474		12.5X20 572	16X25 656	16X31.5 684	18X31.5 710	22X45 780				
330		6.3X11 216	6.3X11 239	6.3X11 265	6.3X11 293	8X15 398	10X16 529	10X20 633		16X20 810	18X31.5 848	16X35.5 900	22X40 900					
470																		
560																		
680																		
820																		
1000																		
1200																		
1500																		
2200																		
3300																		
4700																		
6800																		
10000																		
15000																		

CASE SIZE ØD X L(mm)
Rated Ripple Current (mA_{rms}) at 105°C, 120Hz



ALUMINUM ELECTROLYTIC CAPACITORS**APPROVAL NO.
697-006**

STRUCTURE AND MATERIALS

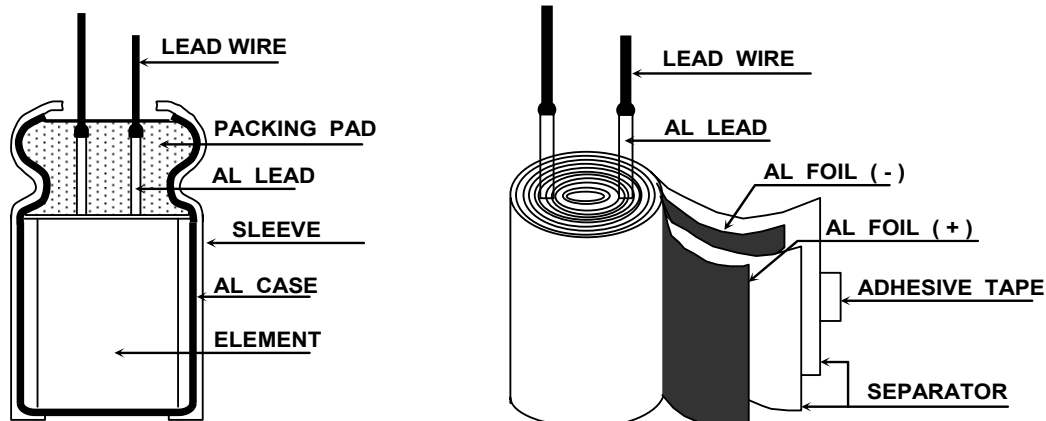

CE04 TYPE

MINIATURE SIZED TYPE CAPACITORS COMPONENT

PART NAME	MATERIALS	VENDER
LEAD WIRE	TINNED COPPER - PLY WIRE(Pb-FREE)	KISTRON (KOREA/CHINA) KOHOKU (JAPAN/CHINA) NANTONG HONG YANG (CHINA)
AL LEAD	ALUMINUM 99.92 % OVER	KANG WON AUTO FITTING NAN TONG HUI FENG (CHINA) NANTONG HONG YANG KOHOKU (JAPAN/CHINA) KISTRON (KOREA/CHINA)
PACKING PAD	SYNTHETIC RUBBER	SUNG NAM (KOREA/CHINA) CCW/ZHE JIANG TIAN TAI (CHINA) ZHE JIANG TIAN HUA
SLEEVE	P.E.T(Poly Ethylene Terephthalate Resin)	MOO DEUNG (KOREA/CHINA) SUZHOU QILIAN SHUN PENG PLASTIC (CHINA) YUN LIN PLASTIC
AL CASE	ALUMINUM 99.0 % OVER	ZHANG JIA GANG LIAN YI LIN AN AO XING (CHINA) NANTONG CHUANGJIA DONG NAM (KOREA/CHINA) D.N TECH/HA NAM
AL FOIL ⊕	FORMED ALUMINUM 99.9 % OVER	K.D.K/JCC/MATSUSHITA (JAPAN) SAM YOUNG (KOREA) BECROMAL (ITALY) SATMA (FRANCE) HEC XINJIANG JOINWORLD (CHINA) HUAFENG / NANTONG / RAOIO LUXON/LITON (TAIWAN)
AL FOIL ⊖	ETCHED ALUMINUM 98.0 % OVER	K-JCC (KOREA) K.D.K (JAPAN) AFT/INCULCU/SHENGHONG (CHINA) ELECON/WU JIANG FEILO
SEPARATOR	INSULATION PAPER	KAN/LUNAN (CHINA) SPO (GERMANY) N.K.K (JAPAN)
ADHESIVE TAPE	POLY PROPYLENE OR POLY IMIDE FILM	NITTO/NICHIBAN (JAPAN) DAEIL/SWECO (KOREA)



When using aluminum electrolytic capacitors, pay strict attention to the following:

1. Electrolytic capacitors for DC application require polarization.

Confirm the polarity. If used in reversed polarity, the circuit life may be shortened or the capacitor may be damaged. For use on circuits whose polarity is occasionally reversed, or whose polarity is unknown, use bi-polarized capacitors (BP-series). Also, note that the electrolytic capacitor cannot be used for AC application.

2. Do not apply a voltage exceeding the capacitor's voltage rating.

If a voltage exceeding the capacitor's voltage rating is applied, the capacitor may be damaged as leakage current increases. When using the capacitor with AC voltage superimposed on DC voltage, care must be exercised that the peak value of AC voltage does not exceed the rated voltage.

3. Do not allow excessive ripple current to pass.

Use the electrolytic capacitor at current values within the permissible ripple range. If the ripple current exceeds the specified value, request capacitors for high ripple current applications.

4. Ascertain the operating temperature range.

Use the electrolytic capacitors according to the specified operating temperature range. Usage at room temperature will ensure longer life.

5. The electrolytic capacitor is not suitable for circuits in which charge and discharge are frequently repeated.

If used in circuits in which charge and discharge are frequently repeated, the capacitance value may drop, or the capacitor may be damaged. Please consult our engineering department for assistance in these applications.

6. Apply voltage treatment to the electrolytic capacitor which has been allowed to stand for a long time.

If the electrolytic capacitor is allowed to stand for a long time, its withstand voltage is liable to drop, resulting in increased leakage current. If the rated voltage is applied to such a product, a large leakage current occurs and this generates internal heat, which damaged the capacitor. If the electrolytic capacitor is allowed to stand for a long time, therefore, use it after giving voltage treatment (Note 1). (However, no voltage treatment is required if the electrolytic capacitor is allowed to stand for less than 2 or 3 years at normal temperature.)

7. Be careful of temperature and time when soldering.

When soldering a printed circuit board with various components, care must be taken that the soldering temperature is not too high and that the dipping time is not too long. Otherwise, there will be adverse effects on the electrical characteristics and insulation sleeve of electrolytic capacitors in the case of small-sized electrolytic capacitors, nothing abnormal will occur if dipping is performed at less than 260°C for less than 10 seconds.

8. Do not place a soldering iron on the body of the capacitor.

The electrolytic capacitor is covered with a vinyl sleeve. If the soldering iron comes in contact with the electrolytic capacitor body during wiring, damage to the vinyl sleeve and/or case may result in defective insulation, or improper protection of the capacitor element.

9. Cleaning circuit boards after soldering.

Some solvents have adverse effects on capacitors.

Please refer to the next page.

10. Do not apply excessive force to the lead wires or terminals.

If excessive force is applied to the lead wires and terminals, they may be broken or their connections with the internal elements may be affected. (For strength of terminals, refer to KS C IEC 60384-4 (JIS C 5101-1, JIS C 5101-4))

11. Care should be used in selecting a storage area.

If electrolytic capacitors are exposed to high temperatures caused by such things as direct sunlight, the life of the capacitor may be adversely affected. Storage in a high humidity atmosphere may affect the solderability of lead wires and terminals.

12. Surge voltage.

The surge voltage rating is the maximum DC over-voltage to which the capacitor may be subjected for short periods not exceeding approximately 30 seconds at infrequent intervals of not more than six minutes. According to KS C IEC 60384-4, the test shall be conducted 1000 cycles at room temperature for the capacitors of characteristic KS C IEC 60384-4 or at the maximum operating temperature for the capacitors of characteristics B and C of KS C IEC 60384-4 with voltage applied through a series resistance of 1000 ohms without discharge. The electrical characteristics of the capacitor after the test are specified in KS C IEC 60384-4. Unless otherwise specified, the rated surge voltage are as follows:

Rated Voltage(V)	2	4	6.3	10	16	25	35	50	63	80	100	160	200	250	315	350	400	450	500
Rated Surge Voltage(V)	2.5	5	8	13	20	32	44	63	79	100	125	200	250	300	365	400	450	500	550

Note 1 Voltage treatment ... Voltage treatment shall be performed by increasing voltage up to the capacitor's voltage rating gradually while lowering the leakage current. In this case, the impressed voltage shall be in the range where the leakage current of the electrolytic capacitor is less than specified value. Meanwhile, the voltage treatment time may be effectively shortened if the ambient temperature is increased (within the operating temperature range).

Note 2 For methods of testing, refer to KS C IEC 60384-4, (JIS C 5101-1, JIS C 5101-4)



CLEANING CONDITIONS

Aluminum electrolytic capacitors that have been exposed to halogenated hydrocarbon cleaning and defluxing solvents are susceptible to attack by these solvents. This exposure can result in solvent penetration into the capacitors, leading to internal corrosion and potential failure.

Common type of halogenated cleaning agents are listed below.

Chemical Name	Structural Formula	Representative Brand Name
Trichlorotrifluoroethane	C ₂ Cl ₃ F ₃	Freon TF, Daiflon S-3
Fluorotrichloromethane	CCl ₃ F	Freon-11, Daiflon S-1
1,1,1-Trichloroethane	F ₂ H ₃ Cl ₃	Chloroethane
Trichloroethylene	C ₂ HCl ₃	Trichiene
Methyl Chloride	CH ₃ Cl	MC

We would like to recommend you the below cleaning materials for your stable cleaning condition taking the place of previous materials.

◎ Isopropyl Alcohol (IPA) or Water

Cleaning method: One of immersion, ultrasonic or vapor cleaning.

Maximum cleaning time: 5 minutes (Chip type: 2 minutes)

※ Do not use AK225AES

Aluminum electrolytic capacitors are easily affected by halogen ions, particularly by chloride ions. Excessive amounts of halogen ions, if happened to enter the inside of the capacitors, will give corrosion accidents—rapid capacitance drop and vent open. The extent of corrosion accidents varies with kinds of electrolytes and seal-materials. Therefore, the prevention of halogen ion contamination is the most important check point for quality control in our production lines. At present, halogenated hydrocarbon-contained organic solvents such as Trichloroethylene, 1,1,1-Trichloroethane, and Freon are used to remove flux from circuit boards.


If electrolytic capacitors are cleaned with such solvents, they may gradually penetrate the seal portion and cause the ejection. When using latex-based adhesive on the capacitors rubber end seal for adhesion to a PCB, corrosion may occur depending on the kind of solvent in the adhesive. Select an adhesive as an organic solvent with dissolved polymer that is not halogenated hydrocarbon. Hot air drying is required for eliminating the solvent between the product and the PCB at 50°C~80°C after coating.

Followings are the penetration path of the halogenated solvent.


- ① Penetration between the rubber and the aluminum case
- ② Penetration between the rubber and the lead wire
- ③ Penetration through the rubber

The inside of the capacitors, the mechanism of corrosion of aluminum electrolytic capacitors by halogen ions can be explained as follows:

Halides (RX) are absorbed and diffused into the seal portion. The halides then enter the inside of the capacitors and contact with the electrolyte of the capacitors. Where by halogen ions are made free by a hydrolysis with water in the electrolyte:



The halogen ions (X⁻) react with the dielectric substance (Al₂O₃) of aluminum electrolytic capacitors:



ALX₃ is dissociated with water:



※ MANUFACTURING SITE

- SamYoung Electronics Co., Ltd. (Korea/China)



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [SamYoung](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#)
[SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#)
[VTL100S10](#) [VTL470S10](#) [VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#)
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#)