



MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

NLC Series

• 105°C 10,000Hrs assured.

- Low impedance.
- Long Life.
- For SMPS, IP-Board, Adaptor.
- RoHS compliant.
- Halogen-free capacitors are also available.

Solvent-proof

WV \leq 50V_{DC}

NLA

NLC

$\varnothing 8 \downarrow$
Long Life




SPECIFICATIONS

Item	Characteristics																																			
Rated Voltage Range	6.3 ~ 100 V _{DC}																																			
Operating Temperature Range	-40 ~ +105°C																																			
Capacitance Tolerance	$\pm 20\%$ (M) (at 20°C, 120Hz)																																			
Leakage Current	I=0.01CV(μ A) or 3 μ A, whichever is greater. Where, I: Max.Leakage current(μ A) C: Nominal capacitance (μ F) V: Rated voltage (V _{DC}) (at 20°C, 2 minutes)																																			
Dissipation Factor ($\tan\delta$)	<table border="1"> <tr> <td>Rated Voltage(V_{DC})</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr> <tr> <td>$\tan\delta$(Max.)</td><td>0.22</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.17</td><td>0.15</td></tr> </table> (at 20°C, 120Hz)									Rated Voltage(V _{DC})	6.3	10	16	25	35	50	63	100	$\tan\delta$ (Max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.17	0.15									
Rated Voltage(V _{DC})	6.3	10	16	25	35	50	63	100																												
$\tan\delta$ (Max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.17	0.15																												
Temperature Characteristics (Max. Impedance ratio)	<table border="1"> <tr> <td>Rated voltage(V_{DC})</td><td>6.3</td><td>10</td><td>16</td><td>25~35</td><td>50~100</td><td></td><td></td><td></td></tr> <tr> <td>Z(-25°C)/Z(+20°C)</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td></td><td></td><td></td></tr> <tr> <td>Z(-40°C)/Z(+20°C)</td><td>8</td><td>6</td><td>4</td><td>3</td><td>4</td><td></td><td></td><td></td></tr> </table> (at 120Hz)									Rated voltage(V _{DC})	6.3	10	16	25~35	50~100				Z(-25°C)/Z(+20°C)	4	3	2	2	2				Z(-40°C)/Z(+20°C)	8	6	4	3	4			
Rated voltage(V _{DC})	6.3	10	16	25~35	50~100																															
Z(-25°C)/Z(+20°C)	4	3	2	2	2																															
Z(-40°C)/Z(+20°C)	8	6	4	3	4																															
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 10,000 hours at 105°C. Capacitance change $\leq \pm 25\%$ of the initial value $\tan\delta \leq 200\%$ of the initial specified value Leakage current \leq The initial specified value																																			
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements. Capacitance change $\leq \pm 25\%$ of the initial value $\tan\delta \leq 200\%$ of the initial specified value (where, 300% for \geq WV63VDC) Leakage current \leq The initial specified value																																			
Others	Satisfied characteristics KS C IEC 60384-4																																			

DIMENSIONS OF NLC Series

Unit(mm)

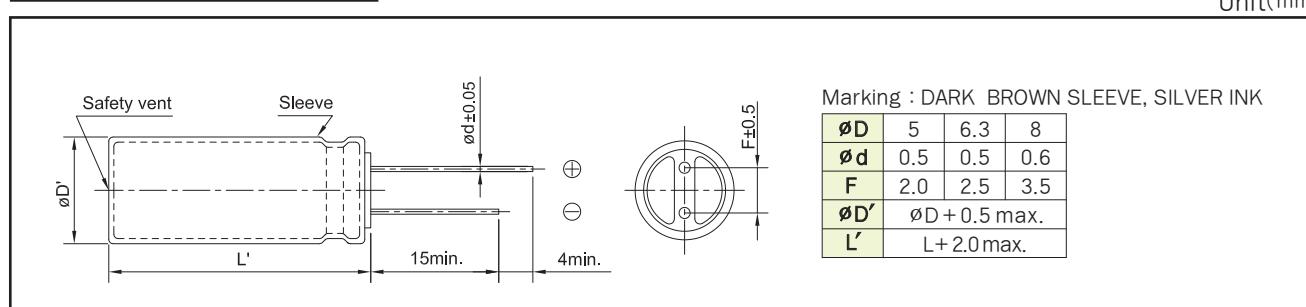

RATINGS OF NLC Series

Vdc ØD×L(mm)	6.3			10			16		
	μF	IMP.	Ripple	μF	IMP.	Ripple	μF	IMP.	Ripple
5×11	150	0.70	175	100	0.70	175	47	0.70	175
6.3×11	330	0.50	252	220	0.50	250	100	0.50	252
8×11.5	680	0.24	400	470	0.24	400	330	0.24	400

Vdc ØD×L(mm)	25			35			50		
	μF	IMP.	Ripple	μF	IMP.	Ripple	μF	IMP.	Ripple
5×11							1	4.0	32
5×11							2.2	3.0	43
5×11							3.3	2.5	84
5×11							4.7	2.5	100
5×11	47	0.70	175	33	0.70	175	10	2.0	110
6.3×11				47	0.60	252	22	1.6	228
6.3×11	100	0.50	252	56	0.50	252	33	1.6	228
8×11.5	220	0.24	400	150	0.24	400	47	0.80	330
8×15				220	0.18	520	100	0.50	400

↑
Impedance (Ω max./20°C, 100kHz)

Vdc ØD×L(mm)	63		100	
	μF	Ripple	μF	Ripple
8×11.5	47	270	33	240

↑
Rated Ripple Current (mA rms/105°C, 100kHz)
Nominal Capacitance(μF)

RATED RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Freq.(Hz) Cap.(μF)	120	1k	10k	50k	100k
1~150	0.40	0.75	0.90	0.93	1.00
220~470	0.50	0.85	0.94	0.96	1.00
680	0.60	0.87	0.95	0.97	1.00

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:

Click to view products by SamYoung manufacturer:

Other Similar products are found below :

[NRELS102M35V16X16C.140LLF](#) [ESRG160ETC100MD07D](#) [227RZS050M](#) [335CKR250M](#) [476CKH100MSA](#) [477CKR100M](#)
[107CKR010M](#) [107CKH063MSA](#) [RJH-25V222MI9#](#) [RJH-35V221MG5#](#) [B43827A1106M8](#) [RJH-50V221MH6#](#) [EKYA500ELL470MF11D](#)
[B41022A5686M6](#) [ESRG250ELL101MH09D](#) [EKMA160EC3101MF07D](#) [RJB-10V471MG3#](#) [ESMG160ETD221MF11D](#)
[EKZH160ETD152MJ20S](#) [RJH-35V122MJ6#](#) [EGXF630ELL621ML20S](#) [RBD-25V100KE3#N](#) [EKMA350ELL100ME07D](#)
[ESMG160ETD101ME11D](#) [ELXY100ETD102MJ20S](#) [EGXF500ELL561ML15S](#) [EKGMG350ETD471MJ16S](#) [35YXA330MEFC10X12.5](#)
[RXW471M1ESA-0815](#) [ELXZ630ELL221MJ25S](#) [ERR1HM1R0D11OT](#) [LPE681M30060FVA](#) [LPL471M22030FVA](#) [HFE221M25030FVA](#)
[LKMD1401H221MF](#) [B41888G6108M000](#) [EKMA160ETD470MF07D](#) [UHW1J102MHD6](#) [EKGMG500ETD221MJC5S](#) [LKMK2502W101MF](#)
[LKMD1401H181MF](#) [LKMI2502G820MF](#) [LKMJ2001J122MF](#) [LKML2501C472MF](#) [LKMJ4002C681MF](#) [450MXH330MEFCSN25X45](#)
[450MXK330MA2RFC22X50](#) [63ZLH560MEFCG412.5X30](#) [ELH2DM331O25KT](#) [ELH2DM471P30KT](#)