

# SanDisk® Industrial Grade SD™ and microSD™ Cards

Providing Trusted Reliability and Endurance

*Now with New Features  
and Increased Endurance*



## Product Highlights

- Operating Temp Range: -25°C to 85°C and -40°C to 85°C
- High endurance: Up to 192 Terabytes Written
- Broad portfolio: 8GB to 128GB
- Extended product life cycle
- Advanced memory management FW features power immunity, auto/manual read refresh, ECC, wear leveling
- New suite of features to enhance reliability and utility, including health status meter, programmable ID, Host lock (card ownership lock), secure FFU, Dynamic Bit Flip Protection
- Durable design: water proof, shock and vibration proof, X-ray proof, magnet proof, impact proof\*
- Operating voltage: 2.7V to 3.6V

## Business Benefits

- Delivers lower system TCO
- Enables real-time analytics at the edge
- Reduces network traffic
- Provides reliable local backup
- Maximize system availability with health status meter, ensuring timely preventative maintenance

## Serving Industrial Applications

- Surveillance
- Transportation
- Industrial PC
- Factory Automation
- Networking
- Medical and Agriculture

## Reliable Edge Storage in a Connected World


The convergence of ubiquitous connectivity and compute capability is driving an exponential growth in connected devices and connected sensors, generating incredible volumes of data and enabling vast new types of transformative applications and business models.

In addition to capturing this data locally as primary or back-up storage, edge storage devices such as SanDisk Industrial Cards will maximize network efficiency and enable systems to analyze the data and act on the results in real-time.

Leveraging more than 28 years of expertise in NAND flash memory and storage systems, SanDisk Industrial Grade SD and microSD cards deliver edge storage solutions for industrial applications requiring high reliability, durability, and high intensity recording, across a wide range of operational requirements.

Designed and tested to withstand the most demanding conditions, and featuring an advanced memory management FW which includes power immunity, auto/manual read refresh, ECC, and wear leveling, data intensive applications can rely on SanDisk Industrial products to capture every critical moment, log each event, and to ensure quality of service to end-users.

These high endurance solutions offer extended product life cycles which can reduce total cost of ownership (TCO) per system by eliminating costly redesigns and requalifications, and minimizing unnecessary maintenance calls.

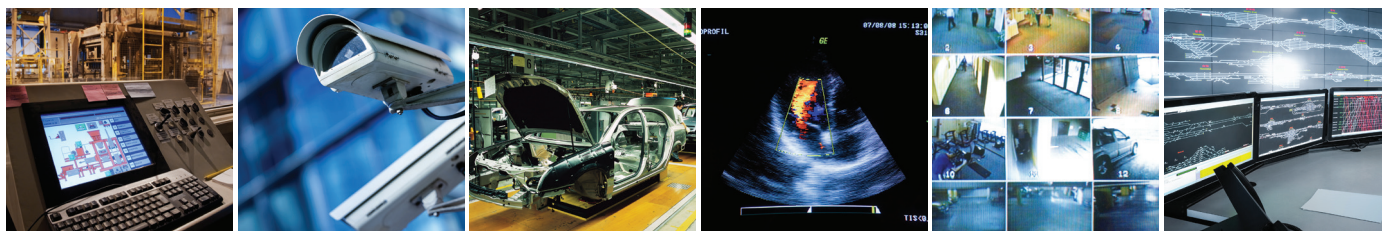

## SanDisk Industrial Card Products

Specifications	Industrial XI SD Cards	Industrial SD Cards	Industrial microSD Cards	Industrial XI microSD Cards
<b>Capacity<sup>1</sup></b>	8GB - 64GB	8GB - 64GB	8GB - 128GB	8GB - 128GB
<b>Interface</b>	SDA 3.01 UHS-I (SDR104)	SDA 3.01 UHS-I (SDR104)	SDA 3.01 UHS-I (SDR104)	SDA 3.01 UHS-I (SDR104)
<b>NAND Flash Technology</b>	MLC	MLC	MLC	MLC
<b>Operating Temp</b>	-40°C to 85°C	-25°C to 85°C	-25°C to 85°C	-40°C to 85°C
<b>Performance<sup>2</sup></b>	Speed Class 10 U1	Speed Class 10 U1	Speed Class 10 U1	Speed Class 10 U1
<b>Sequential W/R<sup>2</sup></b>	Up to 50/80 MB/s	Up to 50/80 MB/s	Up to 50/80 MB/s	Up to 50/80 MB/s
<b>Endurance<sup>3</sup></b>	3K	3K	3K	3K

## Ordering Information

Capacity	Industrial XI SD Cards	Industrial SD Cards	Industrial microSD Cards	Industrial XI microSD Cards
<b>8GB</b>	SDSDAF3-008G-XI	SDSDAF3-008G-I	SDSDQAF3-008G-I	SDSDQAF3-008G-XI
<b>16GB</b>	SDSDAF3-016G-XI	SDSDAF3-016G-I	SDSDQAF3-016G-I	SDSDQAF3-016G-XI
<b>32GB</b>	SDSDAF3-032G-XI	SDSDAF3-032G-I	SDSDQAF3-032G-I	SDSDQAF3-032G-XI
<b>64GB</b>	SDSDAF3-064G-XI	SDSDAF3-064G-I	SDSDQAF3-064G-I	SDSDQAF3-064G-XI
<b>128GB</b>	—	—	SDSDQAF3-128G-I	SDSDQAF3-128G-XI

\* See [www.sandisk.com/proof](http://www.sandisk.com/proof) for additional information

<sup>1</sup> 1GB=1,000,000,000 bytes. Actual user storage less.

<sup>2</sup> Based on internal testing; performance may be lower depending on host device, usage and other factors. 1MB=1,000,000 bytes.

<sup>3</sup> Approximations based on SanDisk internal metrics that quantifies how much data can be written to a card in its lifespan expressed in Terabytes Written (TBW), with write application of 1

## The SanDisk Advantage

- More than 28 years expertise in NAND flash development and system design
- Vertically Integrated
- World Class technical and design support
- BOM control with PCN support

## Contact information

For all inquiries, please email:  
oemproducts@WDC.com

For more information, please visit:  
[www.sandisk.com](http://www.sandisk.com)

# Western Digital

## Western Digital Corporation

951 SanDisk Drive | Milpitas | CA 95035 | USA

Western Digital Technologies, Inc. is the seller of record and licensee in the Americas of SanDisk® products.

©2018 Western Digital Corporation or its affiliates. All rights reserved. SanDisk is a trademark of Western Digital Corporation or its affiliates, registered in the United States and other countries.

The SD, microSD, microSDHC and microSDXC marks and logos are trademarks of SD-3C, LLC. Other brand names mentioned herein are for identification purposes only and may be the trademark(s) of their respective holder(s).

INDUSTRIAL\_2PG\_013118

Playing a critical role in the way users create, keep, and access data, the SanDisk brand has led flash memory innovation for decades and continues to push the boundaries even further through next-generation flash technologies and devices. From mobile and compute devices, to applications in automotive, connected home and industrial/IoT markets, SanDisk-branded embedded and removable flash storage solutions are trusted by businesses and consumers alike to deliver the possibilities of data.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Solid State Drives - SSD category](#):*

*Click to view products by [SanDisk manufacturer](#):*

Other Similar products are found below :

[MTFDDAK256MAZ-1AE12ABYY](#) [SSDSC2CT120A3K5](#) [MTFDDAC512MAM-1K1](#) [SSDPEKKF010T7X1](#) [ATCA7360-MMOD-SATA2](#)  
[SQF-S25S2-8G-S9C](#) [SQF-SLMM4-128G-S9C](#) [96FD25-S128-TR7](#) [SQF-SMSS4-32G-S8E](#) [96FD25-S512-TR7](#) [SQF-SLMM4-16G-S9E](#) [SQF-](#)  
[SDMS4-16G-J6C](#) [SQF-S25S4-16G-S9C](#) [96FD80-N128-LIS](#) [ASD25-MLC064G-CT-160-1](#) [SQF-SMSU4-32G-S9E](#) [SQF-SMSU4-256G-SBE](#)  
[SQF-SMSM4-32G-S9E](#) [SQF-SMSM2-8G-S9E](#) [SQF-SHMS2-16G-S9C](#) [96ND1T-ST-SG7E](#) [SQF-SMSM4-128G-SBE](#) [SQF-SMSM2-32G-SBE](#)  
[SQF-S25U4-128G-SBC](#) [96FD-M032-TR71](#) [SQF-SHMM1-32G-SBC](#) [SSDSC2BX800G401940785](#) [SSDSCKJB150G701](#) [SD7SN6S-128G-](#)  
[1122](#) [AF512UDI-FLU003](#) [SDLF1DM-800G-1HA1](#) [SM619GED-CDZ](#) [SPA31L](#) [SD9SN8W-128G-1122](#) [SD9SN8W-128G](#) [SDINBDG4-32G-](#)  
[XII](#) [MTFDDAA120MBB-2AE1ZABYY](#) [SSDSC2KR120H6XN](#) [SDSDQAD-128G](#) [SM668GXB-ACS](#) [O1118](#) [SDINADF4-64G-H](#)  
[SDLF1CRM-016T-1HA1](#) [0T00327](#) [MTFDDAA240MBB-2AE1ZABYY](#) [SSDSC2BX200G401940779](#) [SQF-S25V4-240G-SCC](#) [SQF-](#)  
[SDMM2-256G-S9E](#) [SQF-SHMM2-64G-SBE](#) [APSDM001G12AN-PT](#) [SQF-SM8V4-240G-SCC](#) [96FD25-ST512G-M13](#)