

# DIODE MODULE

# DD300KB



UL:E76102(M)

Power Diode Module **DD300KB** Series are designed for various rectifier circuits. **DD300KB** has two diode chips connected in series and the mounting base is electrically isolated from elements for simple heatsink construction. Wide voltage rating up to, 1600V is available for various input voltages.

- Isolated mounting base
- Two elements in a package for simple (single and three phase) bridge connections
- Highly reliable glass passivated chips
- High surge current capability

#### (Applications)

- Various rectifiers, Battery chargers, DC motor drives

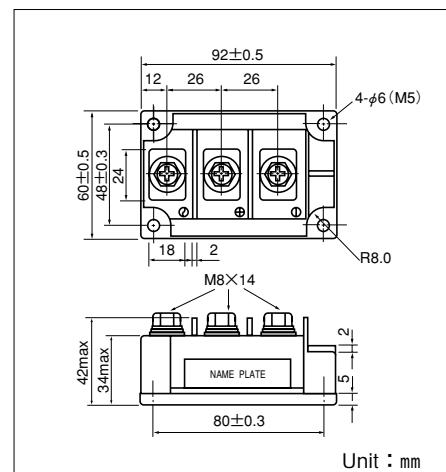

(T<sub>j</sub>=25°C unless otherwise specified)


#### ■ Maximum Ratings

| Symbol           | Item                                | Ratings   |           |            |            | Unit |
|------------------|-------------------------------------|-----------|-----------|------------|------------|------|
|                  |                                     | DD300KB40 | DD300KB80 | DD300KB120 | DD300KB160 |      |
| V <sub>RRM</sub> | Repetitive Peak Reverse Voltage     | 400       | 800       | 1200       | 1600       | V    |
| V <sub>RSM</sub> | Non-Repetitive Peak Reverse Voltage | 480       | 960       | 1300       | 1700       | V    |



| Symbol              | Item                                 | Conditions                                                      | Ratings     | Unit             |
|---------------------|--------------------------------------|-----------------------------------------------------------------|-------------|------------------|
| I <sub>F(AV)</sub>  | Average Forward Current              | Single phase, half wave, 180°C conduction, T <sub>c</sub> =91°C | 300         | A                |
| I <sub>F(RMS)</sub> | R.M.S. Forward Current               | Single phase, half wave, 180°C conduction, T <sub>c</sub> =91°C | 465         | A                |
| I <sub>FSM</sub>    | Surge Forward Current                | ½cycle, 60Hz, peak value, non-repetitive                        | 6000        | A                |
| I <sup>2</sup> t    | I <sup>2</sup> t                     | Value for one cycle of surge current                            | 150000      | A <sup>2</sup> S |
| T <sub>j</sub>      | Operating Junction Temperature       |                                                                 | -40 to +150 | °C               |
| T <sub>stg</sub>    | Storage Temperature                  |                                                                 | -40 to +125 | °C               |
| V <sub>iso</sub>    | Isolation Breakdown Voltage (R.M.S.) | A.C. 1minute                                                    | 2500        | V                |
| Mounting Torque     | Mounting (M5)                        | Recommended Value 1.5-2.5 (15-25)                               | 2.7 (28)    | N·m              |
|                     | Terminal (M8)                        | Recommended Value 8.8-10.0 (90-105)                             | 11 (115)    | (kgf·cm)         |
| Mass                | Typical Value                        |                                                                 | 510         | g                |

#### ■ Electrical Characteristics



| Symbol               | Item                                  | Conditions                                              | Ratings | Unit |
|----------------------|---------------------------------------|---------------------------------------------------------|---------|------|
| I <sub>RRM</sub>     | Repetitive Peak Reverse Current, max. | T <sub>j</sub> =150°C, V <sub>R</sub> =V <sub>RRM</sub> | 50      | mA   |
| V <sub>FM</sub>      | Forward Voltage Drop, max.            | Forward current 750A, Inst measurement                  | 1.50    | V    |
| R <sub>th(j-c)</sub> | Thermal Impedance, max.               | Junction to case                                        | 0.14    | °C/W |

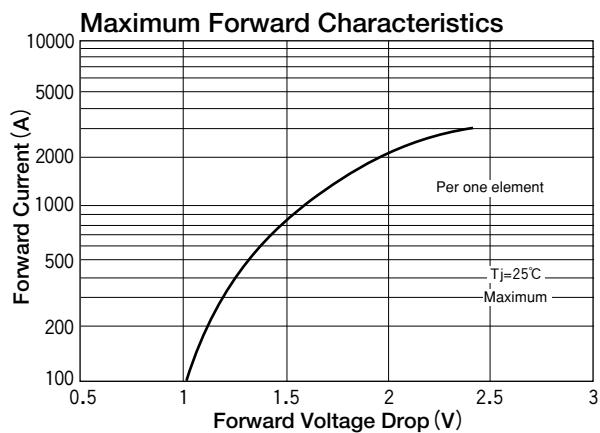

**Average Forward Current vs.  
Power Dissipation**

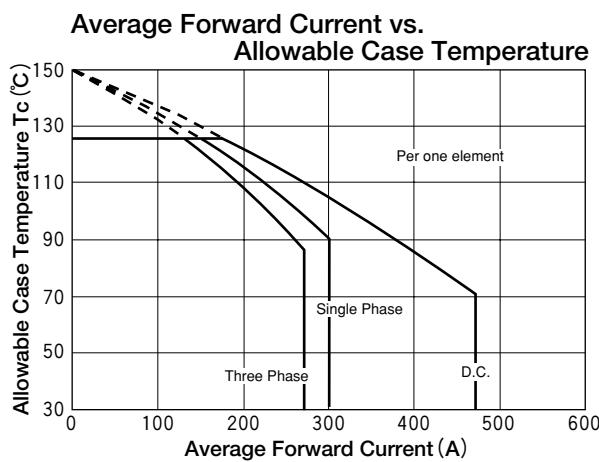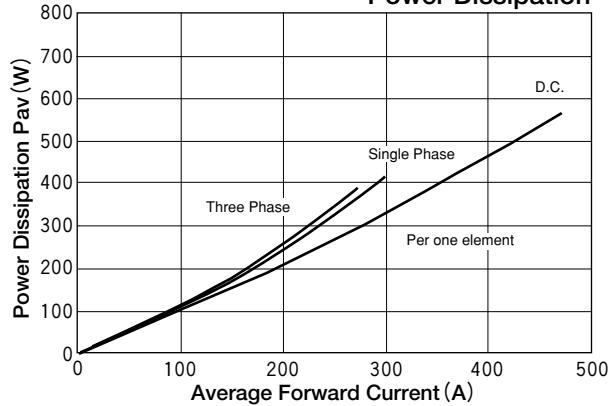

**Cycle Surge Forward Current Rating  
(Non-Repetitive)**

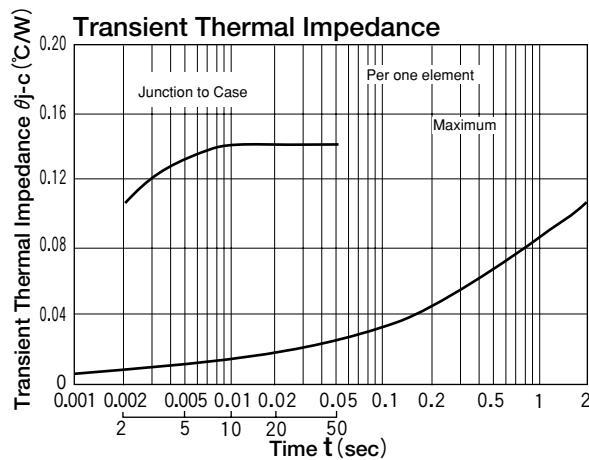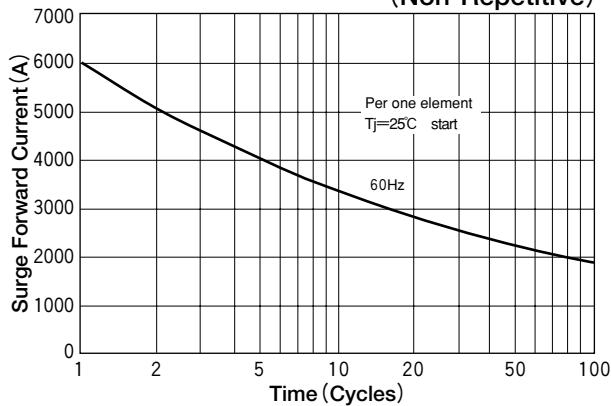

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Discrete Semiconductor Modules category:***

***Click to view products by Sanrex manufacturer:***

Other Similar products are found below :

[M252511FV](#) [DD260N12K-A](#) [DD380N16A](#) [DD89N1600K-A](#) [APT2X21DC60J](#) [APT58M80J](#) [B522F-2-YEC](#) [MSTC90-16](#) [25.163.0653.1](#)  
[25.163.2453.0](#) [25.163.4253.0](#) [25.190.2053.0](#) [25.194.3453.0](#) [25.320.4853.1](#) [25.320.5253.1](#) [25.326.3253.1](#) [25.326.3553.1](#) [25.330.1653.1](#)  
[25.330.4753.1](#) [25.330.5253.1](#) [25.334.3253.1](#) [25.334.3353.1](#) [25.350.2053.0](#) [25.352.4753.1](#) [25.522.3253.0](#) [T483C](#) [T484C](#) [T485F](#) [T485H](#)  
[T512F-YEB](#) [T513F](#) [T514F](#) [T554](#) [T612FSE](#) [25.161.3453.0](#) [25.179.2253.0](#) [25.194.3253.0](#) [25.325.1253.1](#) [25.326.4253.1](#) [25.330.0953.1](#)  
[25.332.4353.1](#) [25.350.1653.0](#) [25.350.2453.0](#) [25.352.1453.0](#) [25.352.1653.0](#) [25.352.2453.0](#) [25.352.5453.1](#) [25.522.3353.0](#) [25.602.4053.0](#)  
[25.640.5053.0](#)